


WHEN SEARCHING FOR THIS CATALOG LISTING WITHIN HONEYWELL'S INTERNAL SAP SYSTEM, THE LISTING MUST BE ENTERED WITHOUT DASHES (BM1RW84225551051A2) DUE TO CHARACTER LIMITATIONS IMPOSED BY THE SYSTEM.

CATALOG LISTING	
ISSUE	BM-1RW84225551051-A2
PAGE	1 OF 1
RELEASE NO.	PPR-19829
REPLACES	X94484-BM

REVISIONS	
A	CO 73287-J G R T 23 NOV 93
B	CO- 75204-B LJF 1 FEB 94
C	C093169 TSM 11 JUN 98
D	0035411 JA 23NOV07
E	0046794 MBH 09DEC08
W	
J	
C	
18	
FEB	
92	
CHECK	
V	
J	
C	

RASTER	DRAWN
G R T	17 FEB 92

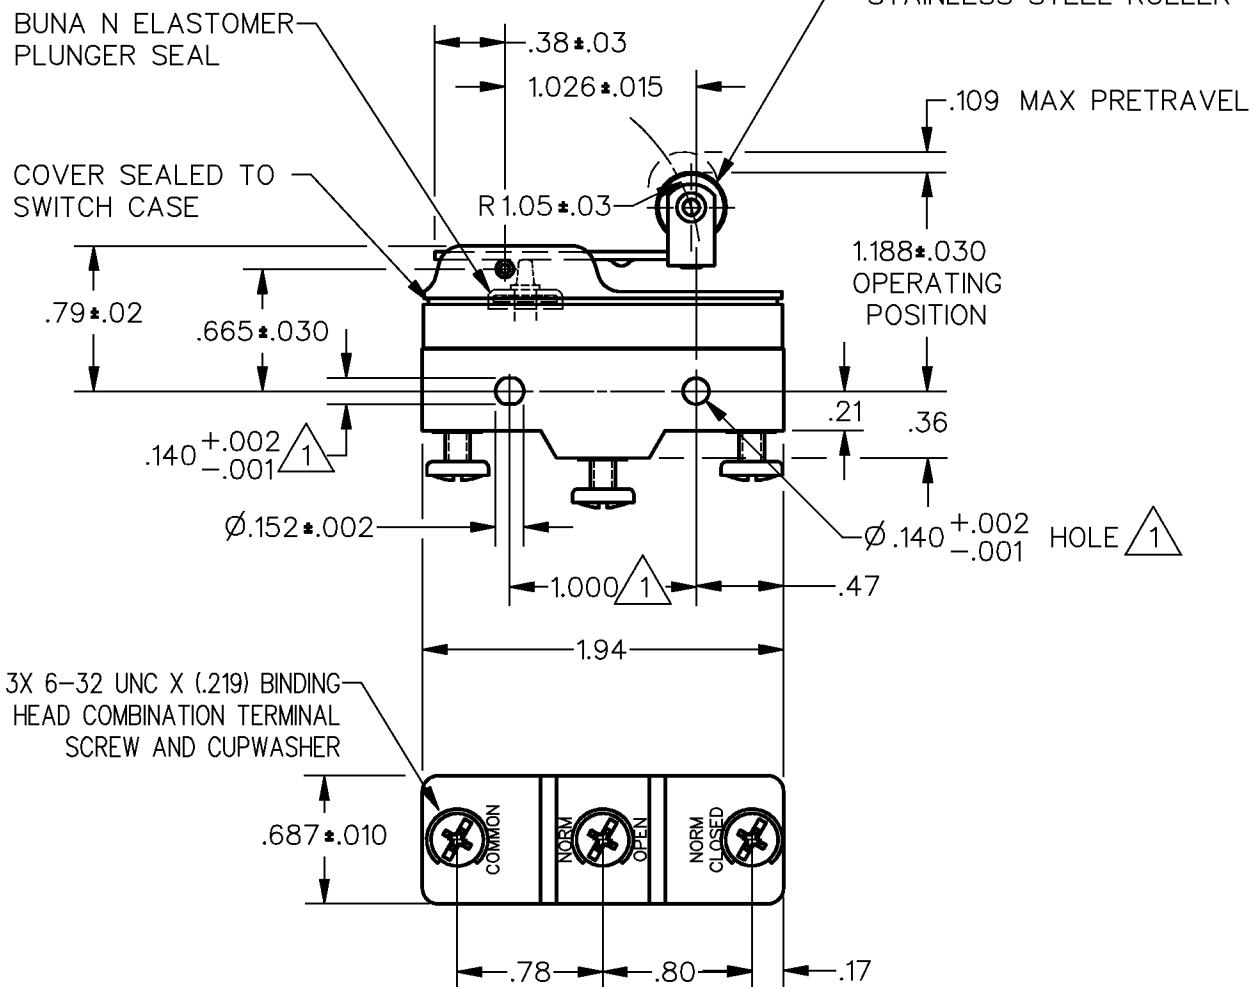


NOTES

1 MOUNTING HOLES WILL ACCEPT PINS OR SCREWS
OF ϕ .139 MAX ON 1.000 ±.002 CENTERS
2 - SEALED CONSTRUCTION PROVIDES SPLASH RESISTANCE

ANSI Y14.5M-1982 APPLIES

THIS DRAWING COVERS A PROPRIETARY ITEM AND IS THE PROPERTY OF MICRO SWITCH, A DIVISION OF HONEYWELL. THIS DRAWING IS NOT TO BE COPIED OR USED WITHOUT THE APPROVAL OF MICRO SWITCH.



CHARACTERISTICS	ELECTRICAL DATA	SCALE	NONE	DO NOT SCALE PRINT
OPERATING FORCE - - - - 2 OZ MAX	CONTACT ARRANGEMENT			
DIFFERENTIAL FORCE	S P D T			
RELEASE FORCE - - - - 1/4 OZ MIN	L161 22A 125, <u>250</u> OR 480 VAC	UNLESS OTHERWISE SPECIFIED TOLERANCES ARE		
PRETRAVEL	1/2HP 125 VAC, 1HP <u>250</u> VAC	ONE PLACE	(.0)	± .030
DIFFERENTIAL TRAVEL - - .001 - .013	L288	TWO PLACE	(.00)	± .015
OVERTRAVEL - - - - -.094 MIN	L315	THREE PLACE	(.000)	± .005
FREE POSITION	L318	ANGLES		±
	22A 250V ~ T85 5E4	WEIGHT	.076 LB	

Mouser Electronics

Authorized Distributor

Click to View Pricing, Inventory, Delivery & Lifecycle Information:

[Honeywell:](#)

[SCN-2202SC](#)