


Connector Location A

Connector Location B

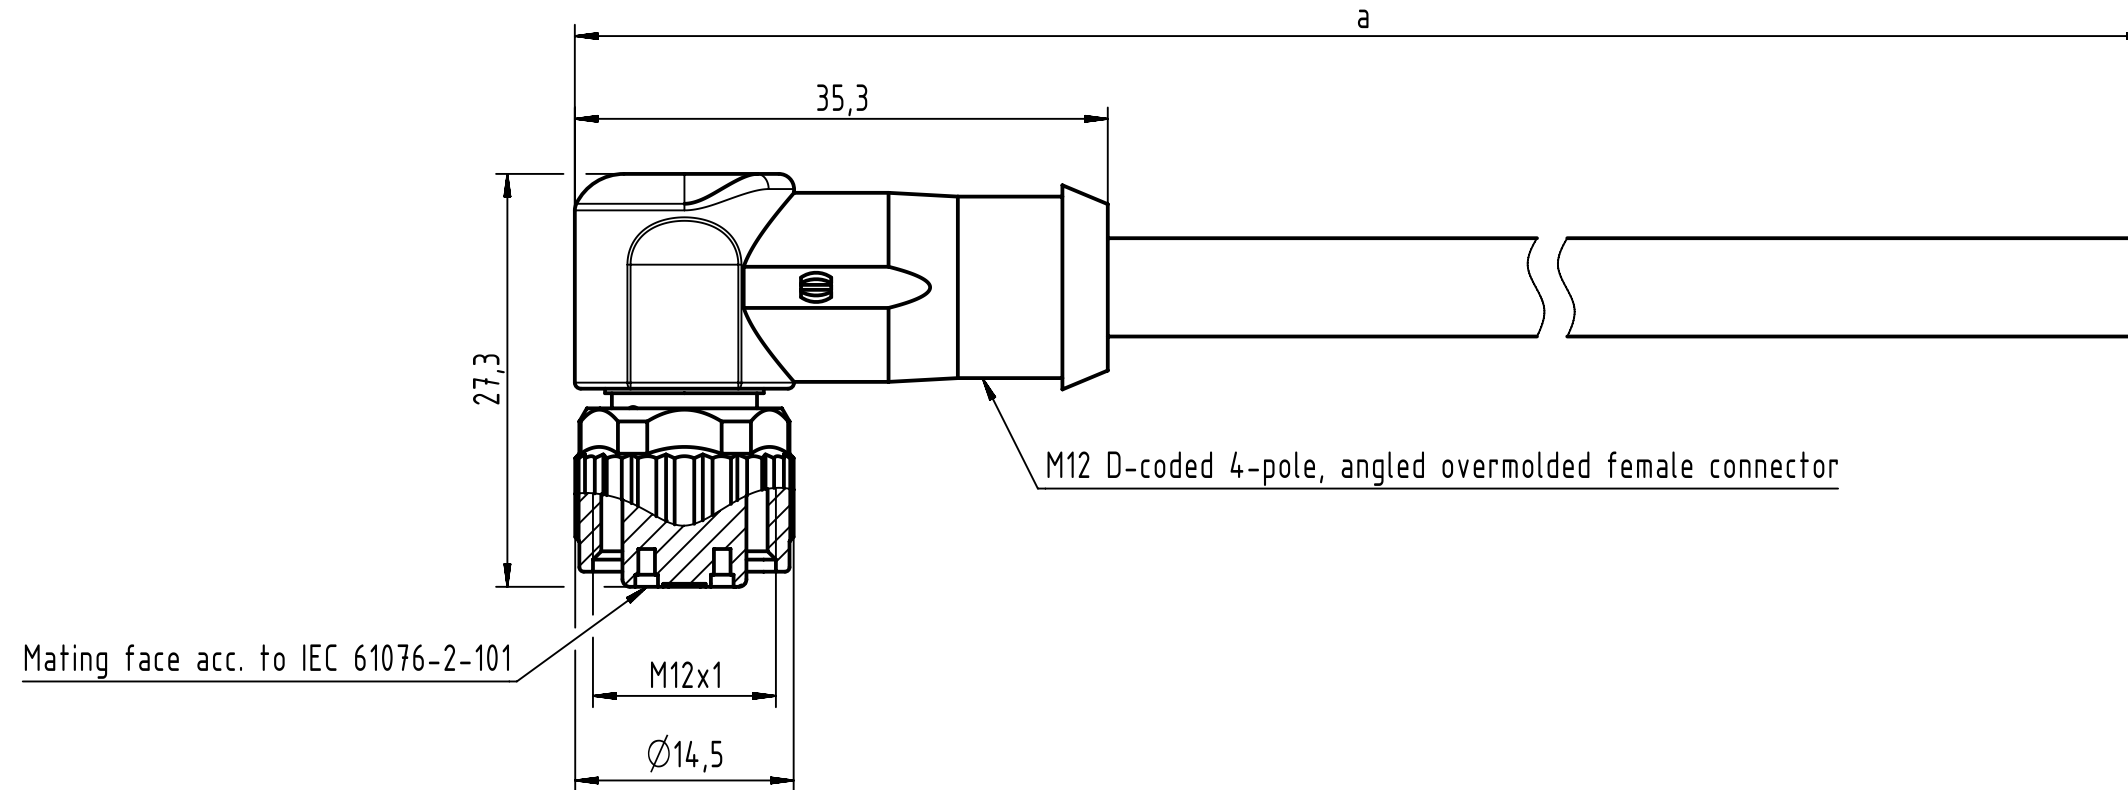

M12 D-coded 4-pole, angled overmolded female connector


Mating face acc. to IEC 61076-2-101

M12x1


Ø14,5

↑ x

Loading-Plan:

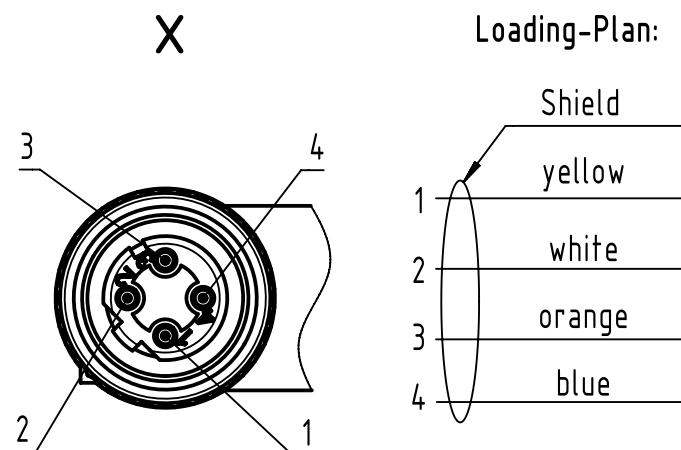

- Protection level: IP67
- Temperature range: -30°C ... +70°C

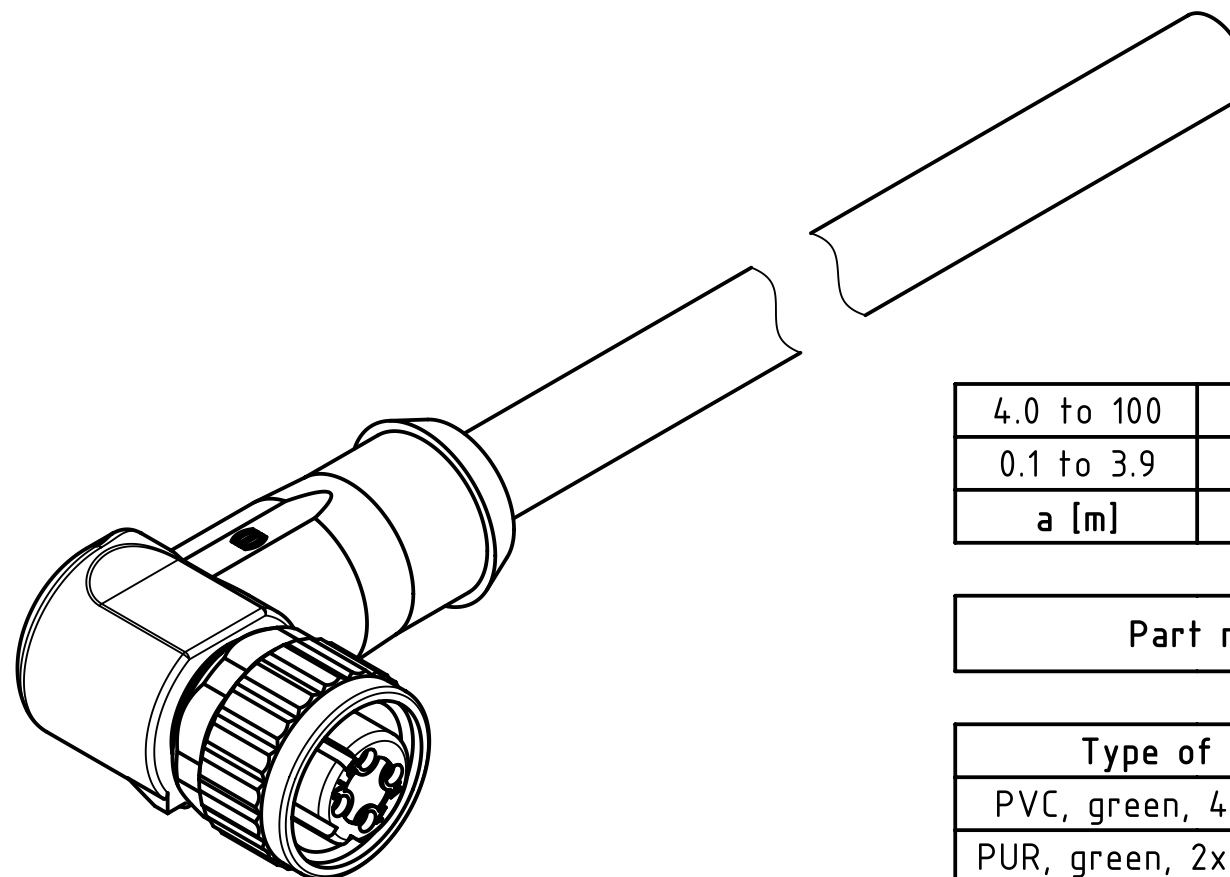


4.0 to 100	+1%
0.1 to 3.9	+0.04
a [m]	Tolerance

length in "1m" step	100	XXX=000
	99	XXX=990
	.	.
	.	.
	12	XXX=120
length in "0.1m" step	11	XXX=110
	10	XXX=100
	9.9	XXX=099
	9.8	XXX=098
	.	.
	.	.
	0.4	XXX=004
	0.3	XXX=003
	0.2	XXX=002
0.1	XXX=001	
Step	a [m]	XXX

Part no.	213495004- XX XXX
----------	------------------------------

Type of cable	XX
PVC, green, 4xAWG22/7	XX=05
PUR, green, 2x2xAWG22/7	XX=77

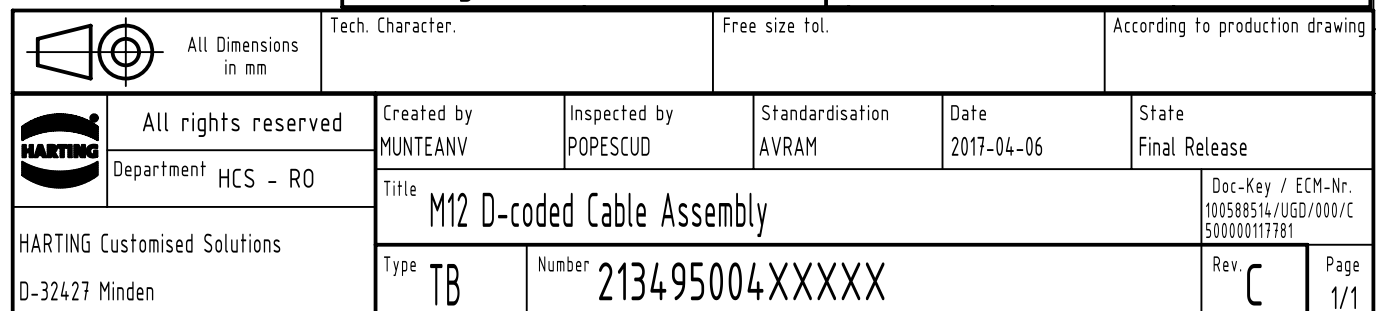

Mouser Electronics

Authorized Distributor

Click to View Pricing, Inventory, Delivery & Lifecycle Information:

HARTING:

[21349500477010](#) [21349500477050](#) [21349500405010](#) [21349500405015](#) [21349500405100](#) [21349500477005](#)
[21349500405020](#) [21349500477020](#) [21349500405075](#) [21349500405050](#) [21349500477075](#) [21349500477015](#)
[21349500405005](#) [21349500477100](#)