


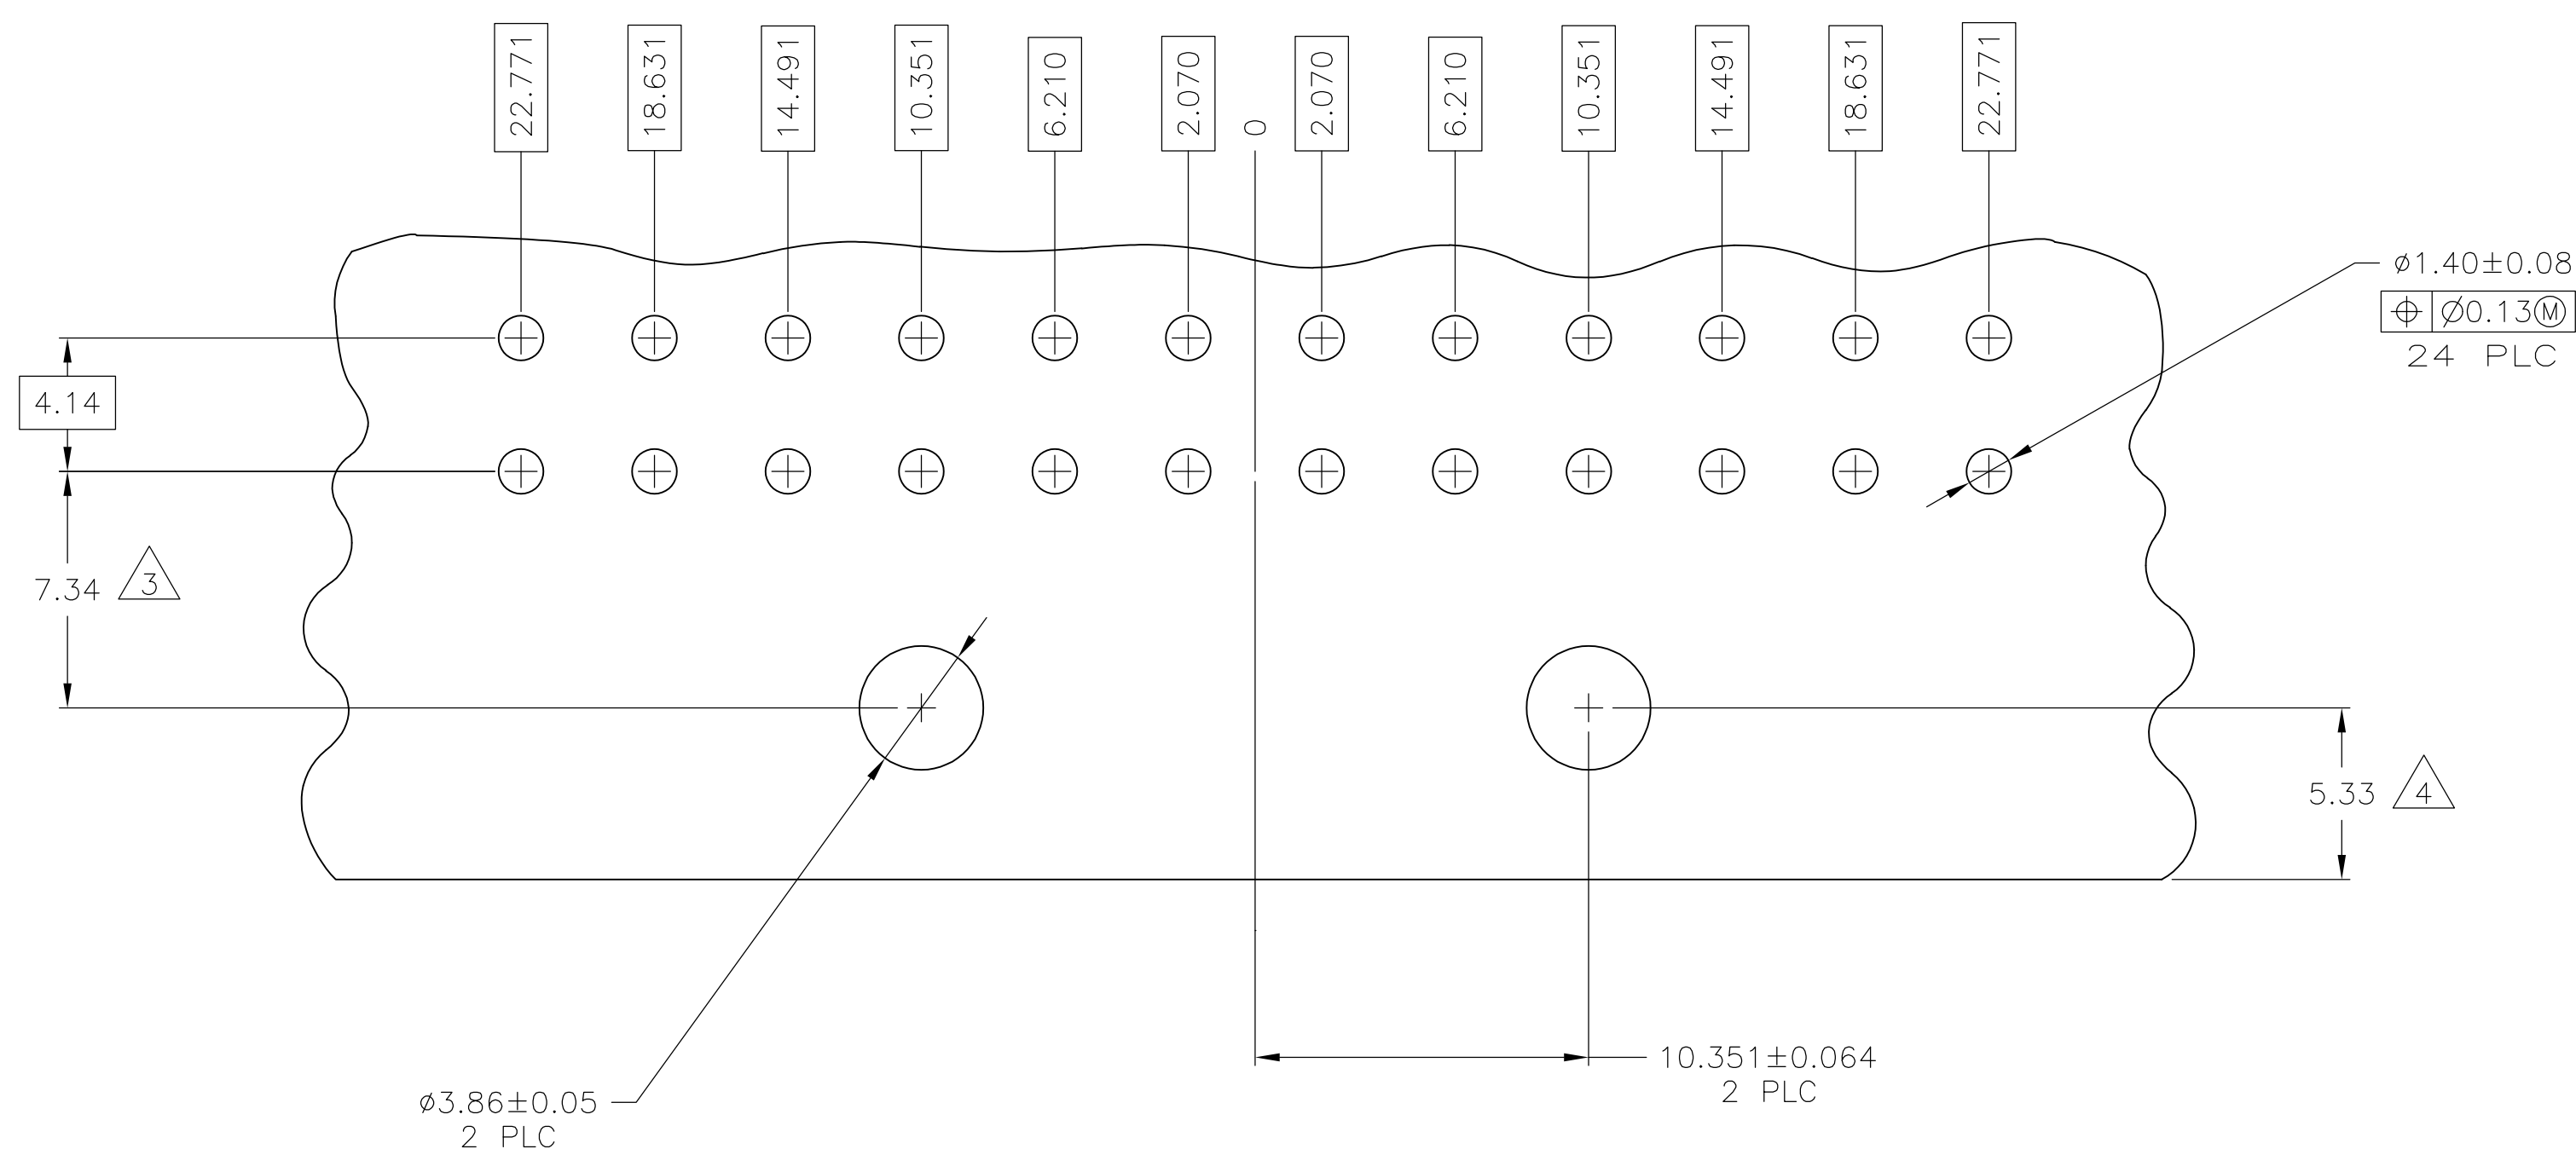

1. PINS TO COMPLY WITH AMP SOLDERABILITY SPEC 109-11-3.
2. MATES WITH PLUG P/N 770587-1.
3. COORDINATE DIMENSION APPLIES FROM CENTER OF ACTUAL FEATURE.
4. RECOMMENDED FOR EDGE MOUNTING.
5. 0.00381 MIN MATTE TIN LEAD OVER 0.00127 MIN NICKEL.
6. 0.00076 MIN GOLD PLATE IN THE LOCALIZED GOLD PLATE AREA, 0.00381 MATTE TIN LEAD IN THE LOCALIZED PLATE AREA, BOTH OVER 0.00127 MIN NICKEL.
7. 0.00381 MIN MATTE TIN OVER 0.00127 MIN NICKEL.
8. 0.00076 MIN GOLD PLATE IN THE LOCALIZED GOLD PLATE AREA, 0.00381 MIN MATTE TIN IN THE LOCALIZED TIN PLATE AREA, BOTH OVER 0.00127 MIN NICKEL.

BRASS	GOLD		NYLON, UL94V-0	WHITE	1-794108-1
BRASS	TIN		NYLON, UL94V-0	WHITE	1-794108-0
BRASS	GOLD		NYLON, UL94V-0	WHITE	794108-2
BRASS	TIN-LEAD		NYLON, UL94V-0	WHITE	794108-1
MATERIAL	PIN	FINISH	MATERIAL	COLOR	PART NO.
			HOUSING		

THIS DRAWING IS A CONTROLLED DOCUMENT.		DIN 244UL03 S. CARPENTER OK 244UL03 C. JONES APVD 244UL03		TE Connectivity NAME HEADER ASSEMBLY, RIGHT ANGLE, W/SHORT PEG.24 CIRCUIT, MINI UNIVERSAL MATE-N-LOK(TM)	
DIMENSIONS: mm 		TOLERANCES, UNLESS OTHERWISE SPECIFIED: 0 PLC ±. — 1 PLC ±. 0.13 2 PLC ±. — 3 PLC ±. — 4 PLC ±. — 5 PLCS ±. — ANGLES —		SIZE CAGE CODE DRAWING NO A1 00779 C 794108	
MATERIAL SEE TABLE		FINISH SEE TABLE		WEIGHT — CUSTOMER DRAWING SCALE 5:1 SHEET 1 OF 1 REV D	

Mouser Electronics

Authorized Distributor

Click to View Pricing, Inventory, Delivery & Lifecycle Information:

[TE Connectivity:](#)

[794108-2](#)