
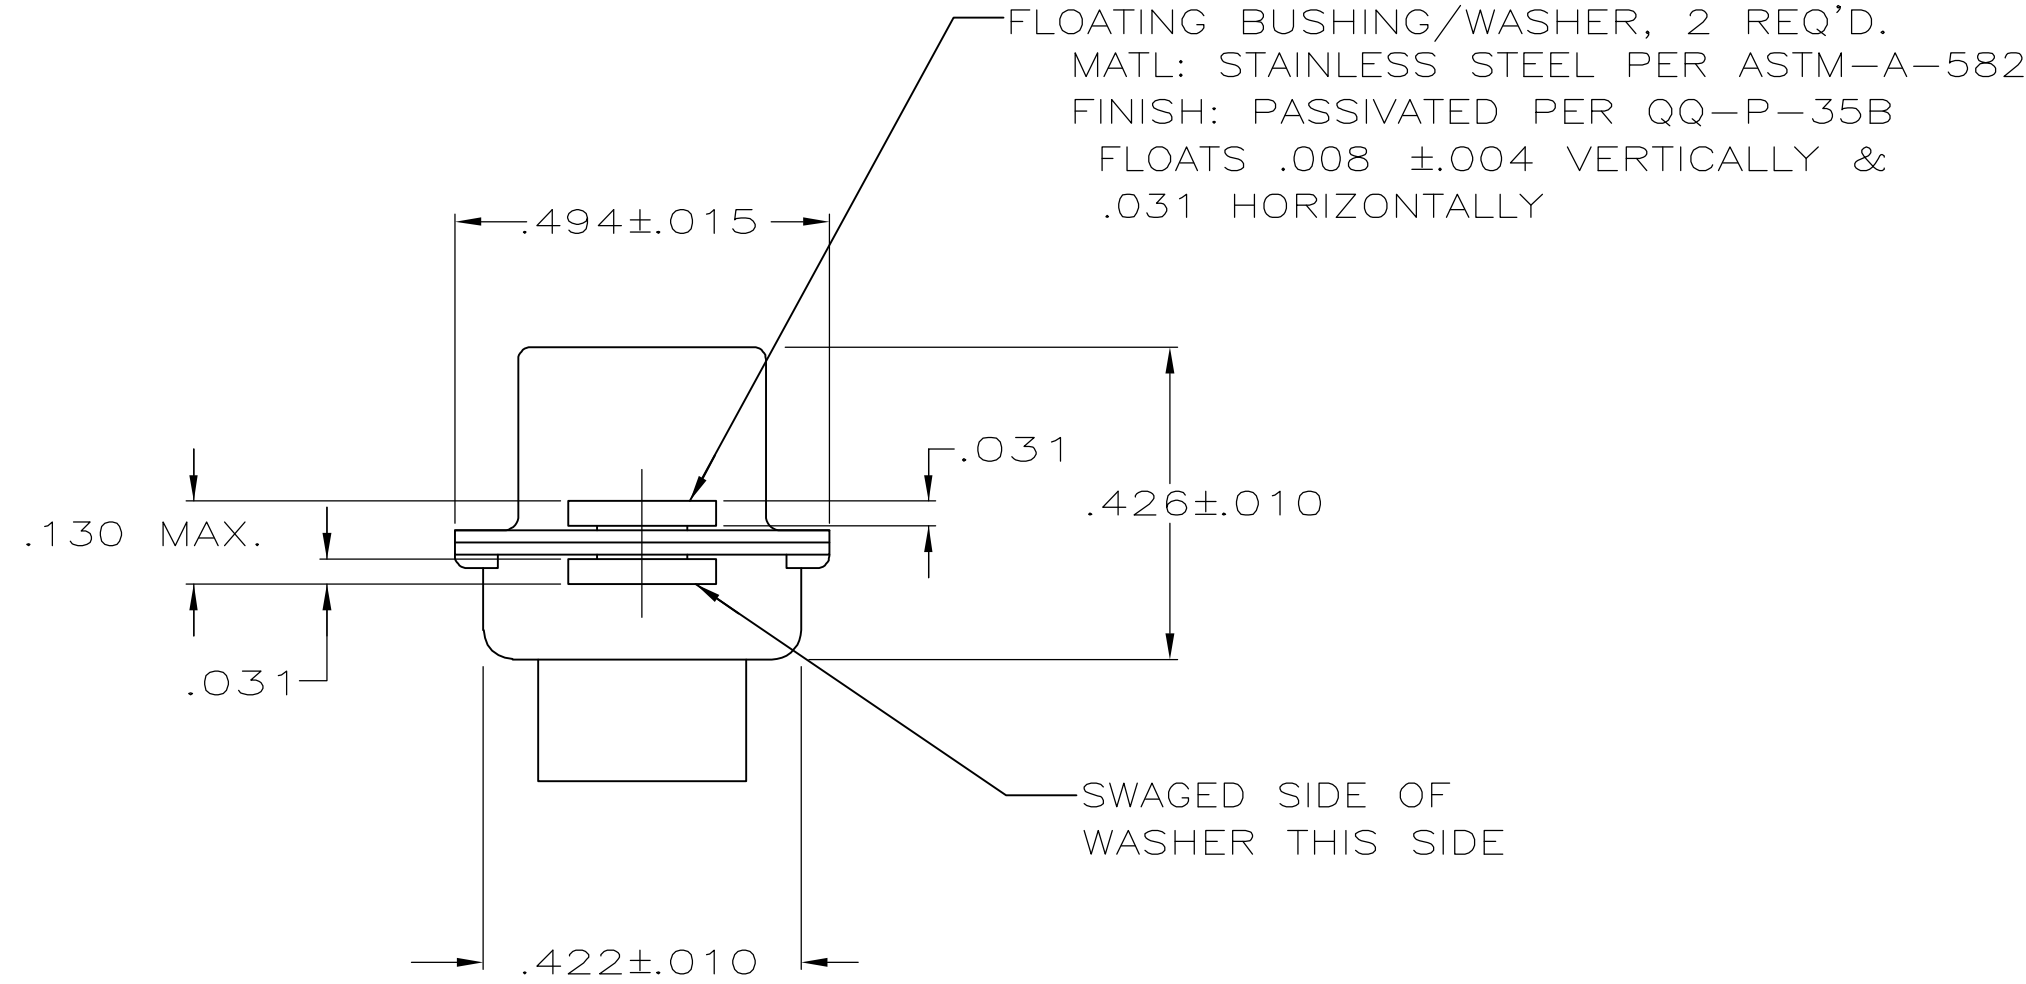
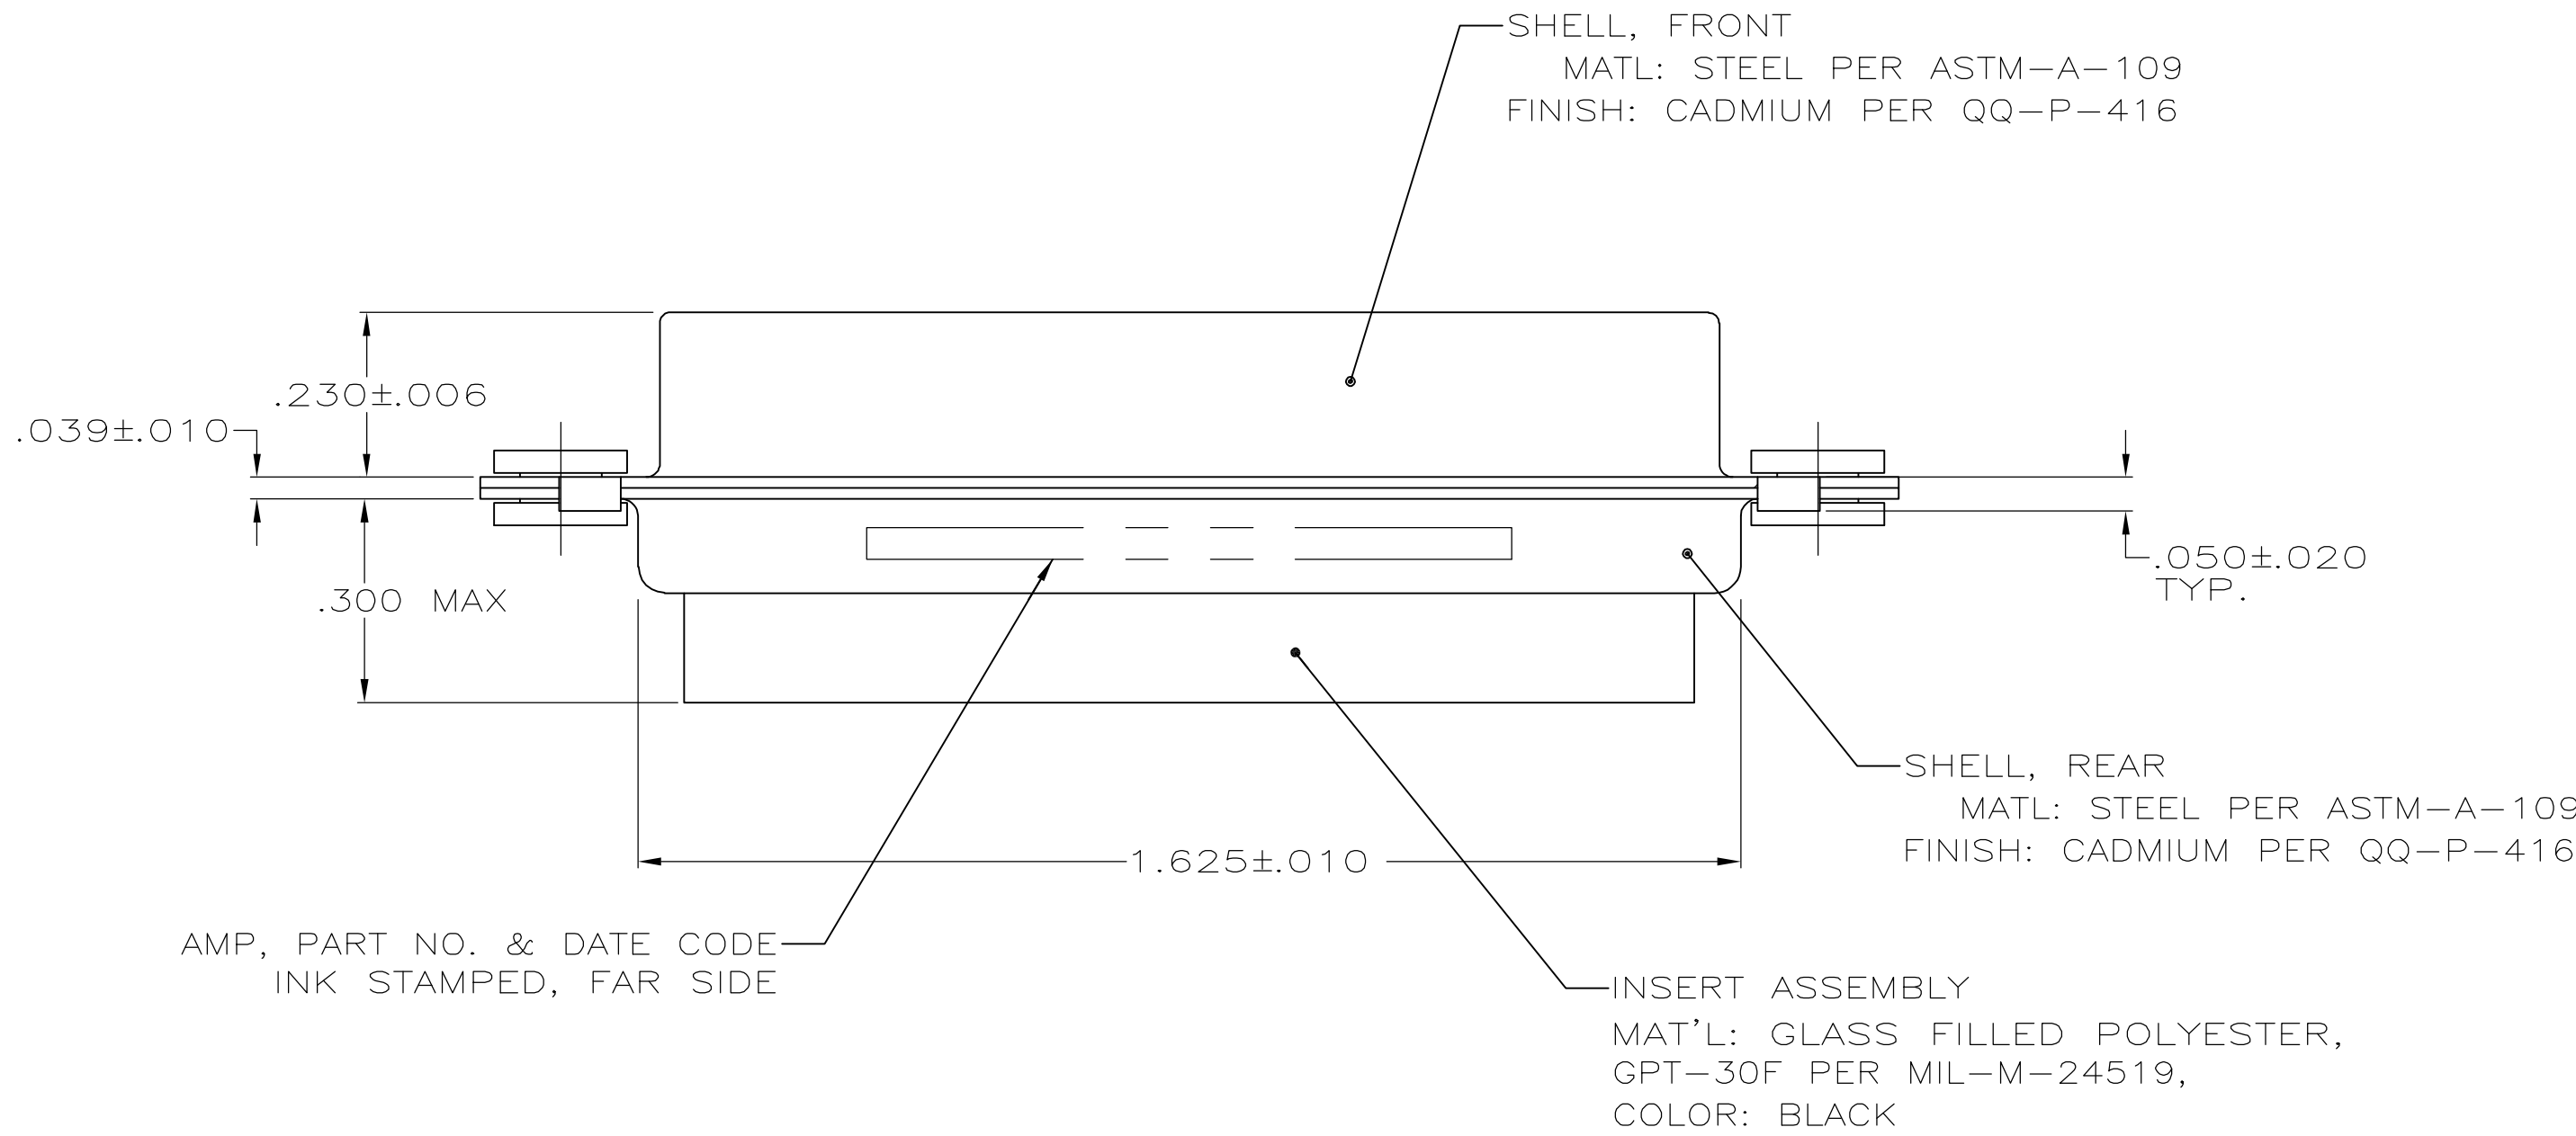


LOC	DIST	REVISIONS				
DF	DO	P	LTR	DESCRIPTION	DATE	OWN
		F	REV	PER	0H14—0036—05	17NOV05
						PY
						DM

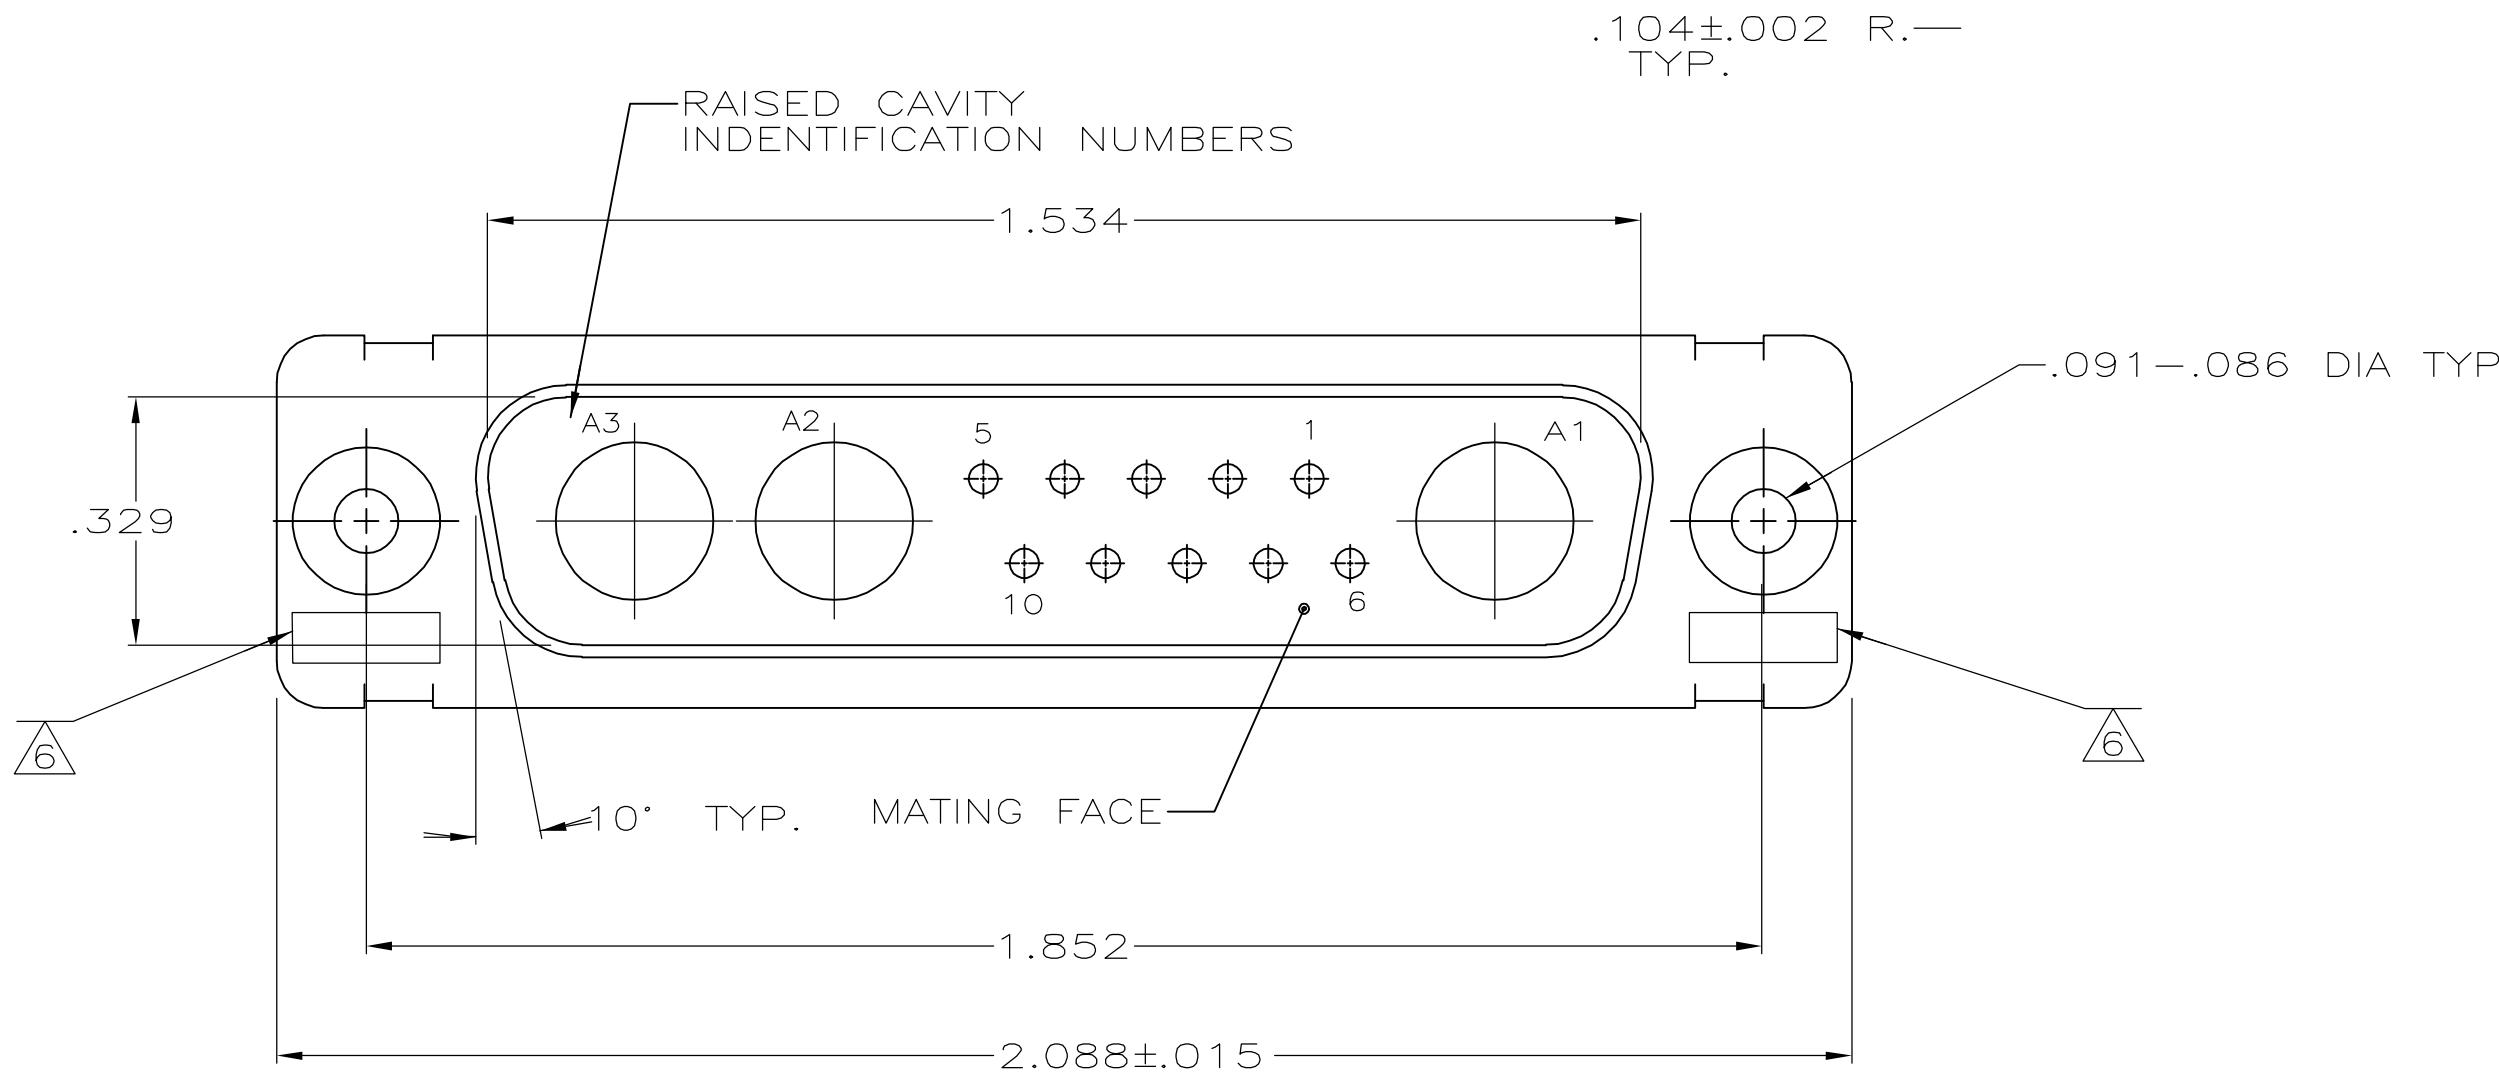

1. THIS PLUG WILL MATE WITH ANY 13C3,SIZE 3 RECEPTACLE IN AMPLIMITE SERIES.
2. MAXIMUM WIRE INSULATION TO BE USED WITH THIS PLUG IS .068 DIA.
3. STAINLESS STEEL RETENTION CLIPS (10) ARE INCLUDED IN INSERT ASSEMBLY.
- 4 CONNECTOR SUPPLIED WITH (11) SIGNAL PIN CONTACTS; PACKAGED IN A SEPERATE BAG.
5. USE 3 SIZE 8 POWER OR COAX PIN CONTACTS. CONSULT PRODUCT ENGINEERING FOR MORE DETAILS
- 6 UL/CSA DESIGNATION STAMPED IN THIS AREA, OPTIONAL.

—	212058-2
	212058-1
REMARKS	PART NO.

THIS DRAWING IS A CONTROLLED DOCUMENT.		DWN C.C.THOMAS CHK A.FMADI	1-27-88 2-3-88	tyco Electronics Tyco Electronics Corporation Harrisburg, Pa 17105-3608	
DIMENSIONS: INCHES	TOLERANCES UNLESS OTHERWISE SPECIFIED:	APVD	—	PRODUCT SPEC	NAME
	0 PLC ± —	APPLICATION SPEC	—	—	PLUG ASSY, AMPLIMITE 13C3, SIZE 3, SERIES 109 COAX MIX, FLOAT BUSHINGS
	1 PLC ± —				
	2 PLC ± —	—	—	—	—
	3 PLC ± .005				
	4 PLC ± —	—	—	—	—
	ANGLES ± —				
MATERIAL SEE CALLOUTS	FINISH SEE CALLOUTS	WEIGHT	—	SIZE A1	CAGE CODE 00779
CUSTOMER DRAWING		SCALE	4:1	SHEET	1 OF 1
		REV	F		

Mouser Electronics

Authorized Distributor

Click to View Pricing, Inventory, Delivery & Lifecycle Information:

[TE Connectivity:](#)

[212058-2](#)