

DIALIGHT PART NUMBER	LED COLOR	
	POSITION 1	POSITION 2
553-0701F	** BLANK **	RED / GREEN
553-0704F	** BLANK **	YELLOW / GREEN
553-0711F	RED / GREEN	RED / GREEN
553-0714F	RED / GREEN	YELLOW / GREEN
553-0715F	RED / GREEN	RED / YELLOW
553-0717F	RED / GREEN	ORANGE/GREEN
553-0740F	YELLOW / GREEN	** BLANK **
553-0741F	YELLOW / GREEN	RED / GREEN
553-0744F	YELLOW / GREEN	YELLOW / GREEN
553-0745F	YELLOW / GREEN	RED / YELLOW
553-0751F	RED / YELLOW	RED / GREEN
553-0754F	RED / YELLOW	YELLOW / GREEN
553-0755F	RED / YELLOW	RED YELLOW

RoHS COMPLIANT 553-07XXF

Part Numbers with the "F" suffix ending are RoHS Compliant.
For example: 553-0744F
Packaging is marked with "RoHS Compliant" label or equivalent markings. Parts can be wave soldered, dip soldered or hand soldered using typical lead-free soldering process with max 260°C temp. for 5 sec.



ATTENTION:
OBSERVE PRECAUTIONS FOR
HANDLING ELECTROSTATIC
SENSITIVE DEVICES



REV	REVISIONS	DRN	CKD	APP	DATE
A	NEW RELEASE	TWC	N.O.	TC	6-7-06
B	ADDED P/N'S 553-0715F,553-0745F; REMOVED REV TABLE, ADDED METRIC DIMENSIONS, REMOVED NOTE 2.	KLJ	N.O.	MES	12-3-08
C	ADDED P/N'S 553-0751F, 553-0754F	KLJ	FN	NO	1-5-09
D	ADDED P/N 553-0755F	JG	WFB	NO	4-19-13
E	ADDED P/N 553-0717F, 553-0755F REVISED LEAD DIM, WAS .02 SQ REVISED HOLE PATTERN, WAS .043 ADDED ORANGE/GREEN COLOR REVISED LED SPECS	LD			

OPERATING CHARACTERISTICS AT 25 °C AMBIENT													
LED	COLOR	LUMINOUS INTENSITY TEST CONDITION	LUMINOUS INTENSITY (mcd)			FORWARD VOLTAGE @I _F = 20 mA (V)		REVERSE CURRENT (μ A)	DOMINANT WAVELENGTH (nm)			PEAK WAVELENGTH (nm)	VIEWING ANGLE (DEG)
			MIN	TYP	MAX	TYP	MAX		MIN	TYP	MAX		
R/G DIFFUSED BI-COLOR LED	RED	I _F = 10mA	1.2	5.6	30	2.0	2.6	100	617	621	633	635	200
	GREEN	I _F = 10mA	1.5	8.7	30	2.1	2.6	100	563	569	572	565	200
Y/G DIFFUSED BI-COLOR LED	YELLOW	I _F = 10mA	3.0	—	8.5	2.1	2.6	100	583	586	589	585	80
	GREEN	I _F = 10mA	6.5	—	18	2.1	2.6	100	563	569	572	565	80
R/Y DIFFUSED BI-COLOR LED	RED	I _F = 20mA	2.5	8.7	—	2.0	2.6	100	—	621	—	630	80
	YELLOW	I _F = 20mA	2.5	8.7	—	2.1	2.6	100	—	588	—	585	80
O/G DIFFUSED BI-COLOR LED	ORANGE	I _F = 10mA	14.0	50.0	85.0	—	2.6	10	600	605	614	621	60
	GREEN	I _F = 10mA	5.0	12.0	18.0	—	2.6	10	560	565	570	574	60



ABSOLUTE MAX RATINGS AT 25°C AMBIENT	R/G BI-COLOR		Y/G BI-COLOR		R/Y BI-COLOR		O/G BI-COLOR		UNITS
	RED	GREEN	YELLOW	GREEN	RED	YELLOW	ORANGE	GREEN	
POWER DISSIPATION	100	100	60	100	100	60	60	100	mW
CONTINUOUS FORWARD CURRENT	30	30	20	30	30	20	20	30	mA
PEAK FORWARD CURRENT	90	90	80	120	120	80	80	120	mA
DERATE LINEARLY FROM 50°C	0.4	0.4	0.25	0.4	—	—	0.25	0.4	mA/°C
REVERSE VOLTAGE	5						9		V
STORAGE TEMPERATURE	-55 TO +100								°C
OPERATING TEMPERATURE	-55 TO +100								°C
SOLDERING TEMPERATURE, FOR 5 SEC	260								°C

NOTES:

- LEADS TO FIT INTO HOLES SPACED AS PER PATTERN.
- LED LEAD DIMENSIONS SHOWN ARE MEASURED AT HOUSING EXIT.
- PIN NUMBERS FOR REFERENCE ONLY, DESIGNATION NON-EXISTENT ON PART.
- DIALIGHT PART NUMBERS: 553-07XXF
- THIS ASSEMBLY CONTAINS ELECTROSTATIC DISCHARGE SENSITIVE DEVICES (ESDS). MAINTAIN ALL PRECAUTIONARY MEASURES DURING ASSEMBLY, HANDLING, AND STORAGE IN ACCORDANCE WITH IPC-A-610.

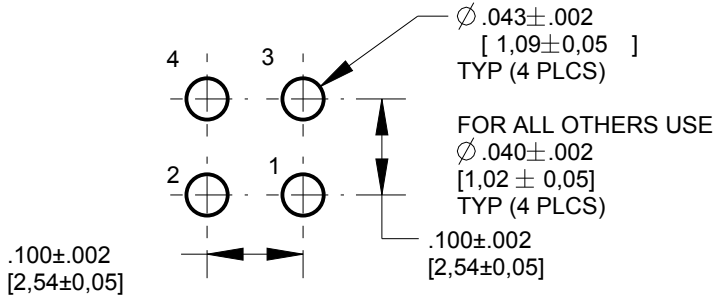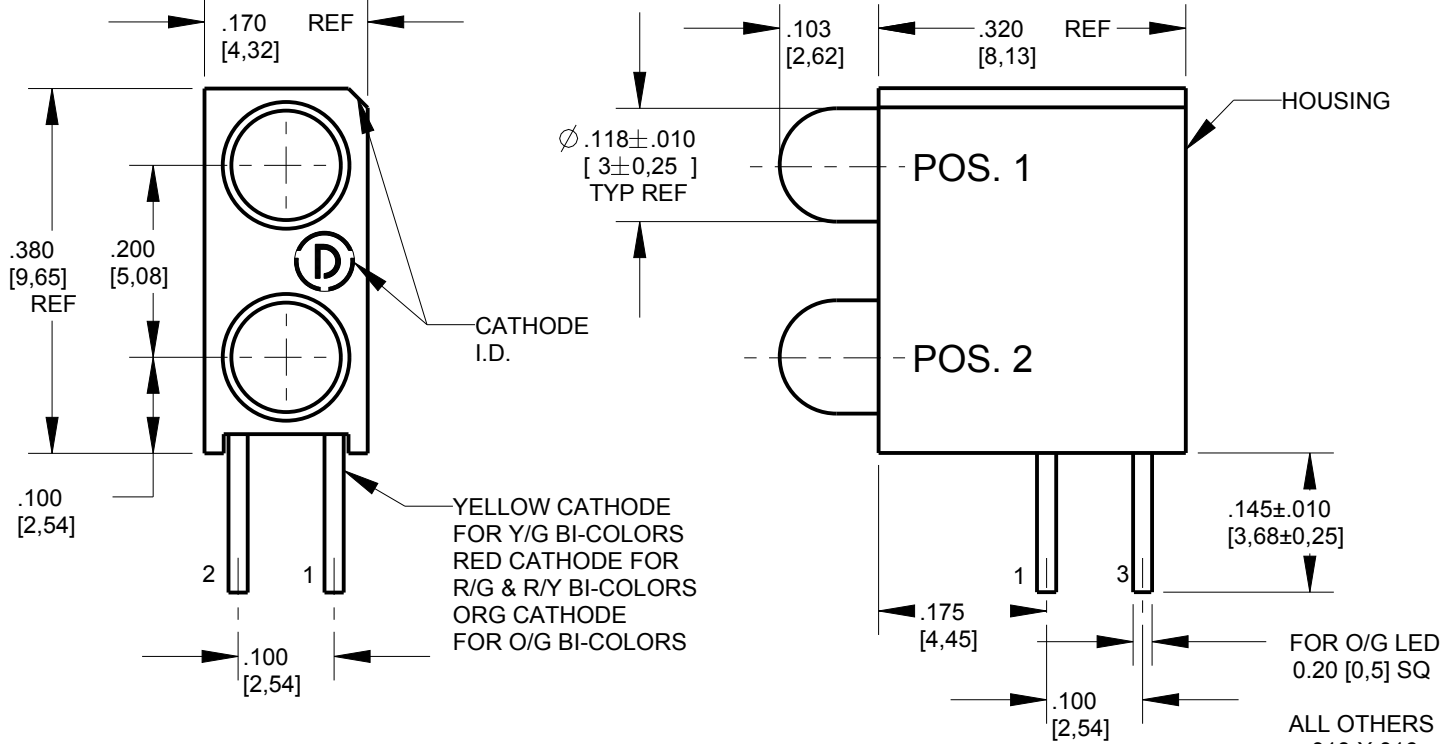

RECOMMENDED HOLE PATTERN GAUGE

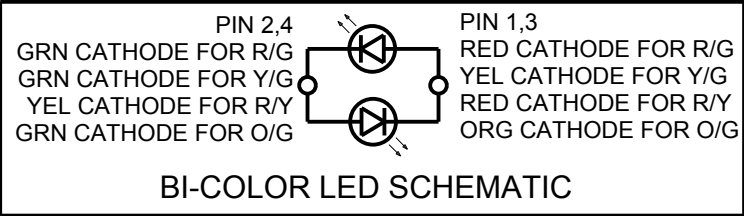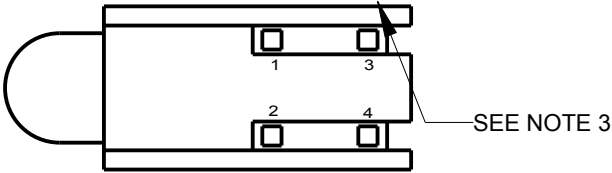

THIS DRAWING AND THE CONTENTS HEREIN ARE CONFIDENTIAL AND THE SOLE PROPERTY OF DIALIGHT CORP. REPRODUCTION OF THIS DRAWING OR CONSTRUCTION OF ANY PARTS WITHIN THIS DRAWING ARE FORBIDDEN WITHOUT THE WRITTEN CONSENT OF DIALIGHT CORP.			
SCALE: 5.000		DRAWING NUMBER	REV
ALL DIM's: INCH (mm)			
TOLERANCES: UNLESS OTHERWISE SPECIFIED		C-17409	E
FRACTIONS: ±1/64			
DECIMALS (.XX): ±.02			
DECIMALS (.XXX): ±.015			
ANGLES: ±3°		TITLE 3mm BI-LEVEL CBI RoHS COMPLIANT	
FINISH		MATERIAL	
FSCM 83330		 1501 ROUTE 34 SOUTH FARMINGDALE, NJ 07727 (732) 919-3119 www.dialight.com	
		SHEET 1 OF 1	FAMILY TABLE:

Mouser Electronics

Authorized Distributor

Click to View Pricing, Inventory, Delivery & Lifecycle Information:

Dialight:

[553-0704F](#) [553-0714F](#) [553-0714-849F](#) [553-0741F](#) [553-0740F](#) [553-0701F](#) [553-0751F](#)