

SCALA NON IMPEGNATIVA
(DO NOT SCALE)
DIMENSIONI IN mm
(DIMENSIONS IN)

METRIC

PROIEZIONE EUROPEA
(EUROPEAN PROJECTION)

SEZIONE A-A
(SECTION A-A)

MICRO RELAY

BOSCH
A-332-203-100

OR SIEMENS
V23073-B1008-A203

RAPPRESENTAZIONE MODULARITA'
(MODULARITY SKETCH)
SCALE 1:1

NOTA: NON ASSEMBLARE PIU'
DI 2 CONNETTORI INSIEME
(NOTE: DO NOT ASSEMBLE MORE
THAN 2 CONNECTORS TOGETHER)

AGGANCIO SECONDARIO A SPORTELLLO
(HINGED FLAP SECONDARY LOCK)

AGGANCIO SECONDARIO A SPORTELLLO
(HINGED FLAP SECONDARY LOCK)

NERVATURE DI GUIDA
(SLIDING RIBS)

VERDE (GREEN)	PA 6.6 (PA 6.6 UNFILLED)	281988-5
MARRONE (BROWN)		281988-4
ROSSO (RED)		281988-3
NERO (BLACK)		281988-2
NEUTRO (CLEAR)		281988-1
FINITURA / COLORE (FINISH / COLOUR)	MATERIALE (MATERIAL)	NUMERO (PART NUMBER)

CUSTOMER DWG. FOR REFERENCE ONLY
DISEGNO PER CLIENTE SOLO PER RIFERIMENTO

RELEASE FOR PUBLICATION 19

© COPYRIGHT 19 BY AMP INCORPORATED, HARRISBURG, PA. ALL INTERNATIONAL RIGHT
RESERVED. AMP PRODUCTS MAY BE COVERED BY U.S. AND FOREIGN PATENT AND/OR PATENT PENDING

TOLLERANZE, SE NON DIVERSAMENTE SPECIFICATO (TOLERANCES, UNLESS OTHERWISE SPECIFIED)	DIAM. ISOLANTE (INS. DIA. RANGE)	RANGO FILO (WIRE RANGE)	SCALA (SCALE)
± 0.3	---	---	2:1















AMP AMP ITALIA S.p.A.
Corso F.lli Cervi, 15
COLLEGNO (TORINO)

DESCRIZIONE
(DESCRIPTION) 5 POS. MODULAR CONN. FOR
MICRO-RELAY WITH SECONDARY LOCK

LOC. SIZE NUMERO
(DWG NO.)
REV. FOGLIO
(SHEET)

REV.	REVISIONI (REVISION RECORD)	DIS.	DATA (DATE)
1	REPLACES PREVIOUS ISSUES	O.C.	1989
2	PN. 281988 WAS PN. 87-51163	T.C.	1989
3	REDRAWN BY CAD	C.I.	1990
4	REVISED	C.I.	1991
5	REVISED	C.I.	1992
A	IN PRODUCTION (I-2992)	C.I.	1992
C	ADDED P/N -5 AND REVISED FOR EC ET00-0085-85	M.P.	1992
D	ADDED P/N -3 AND -4 PER EC ET00-0297-96	A.F.	1996

I A3 C-281988 D 1 OF 1

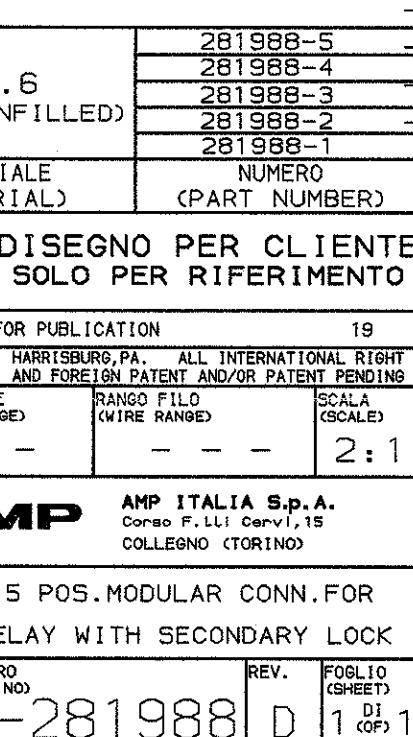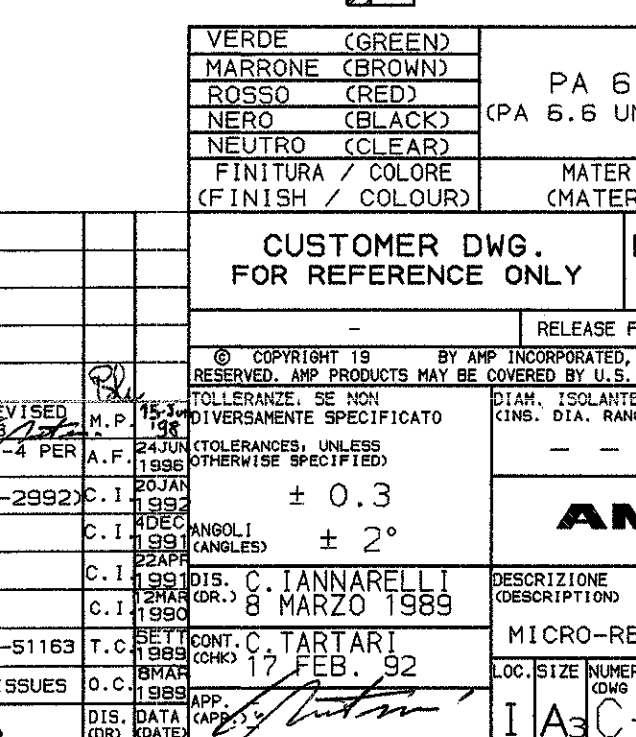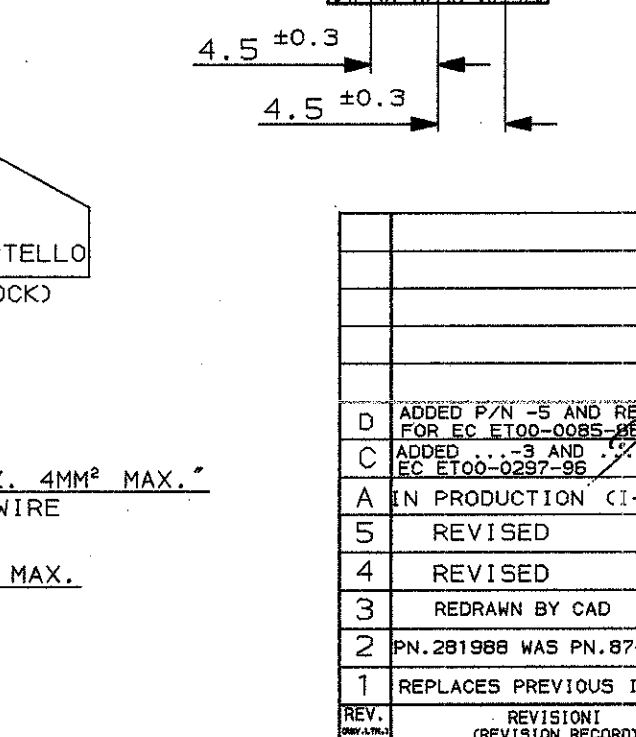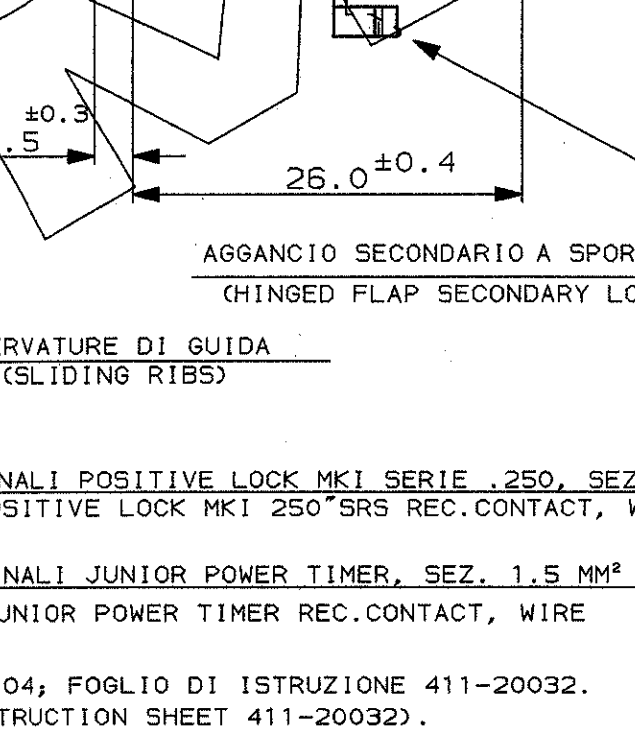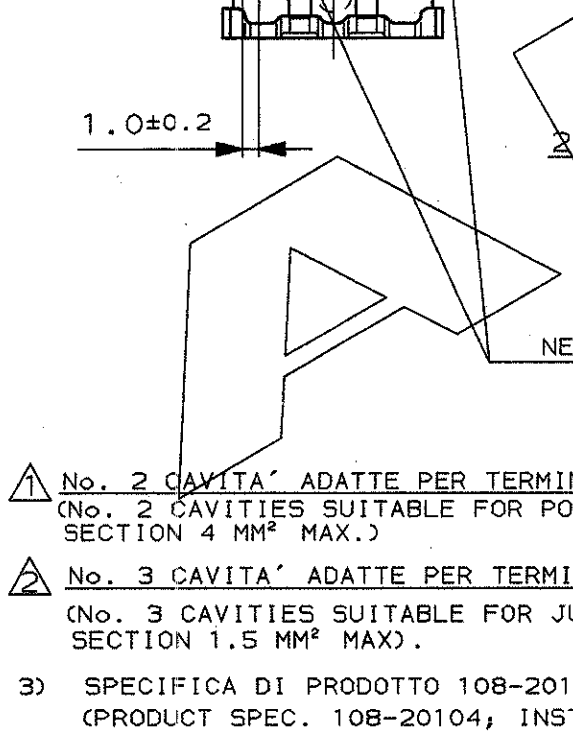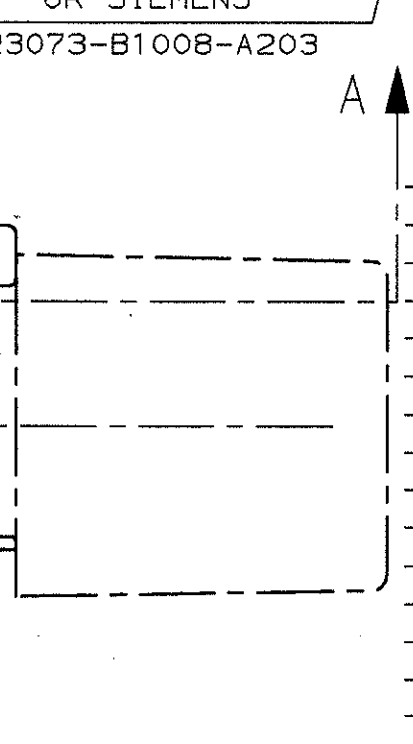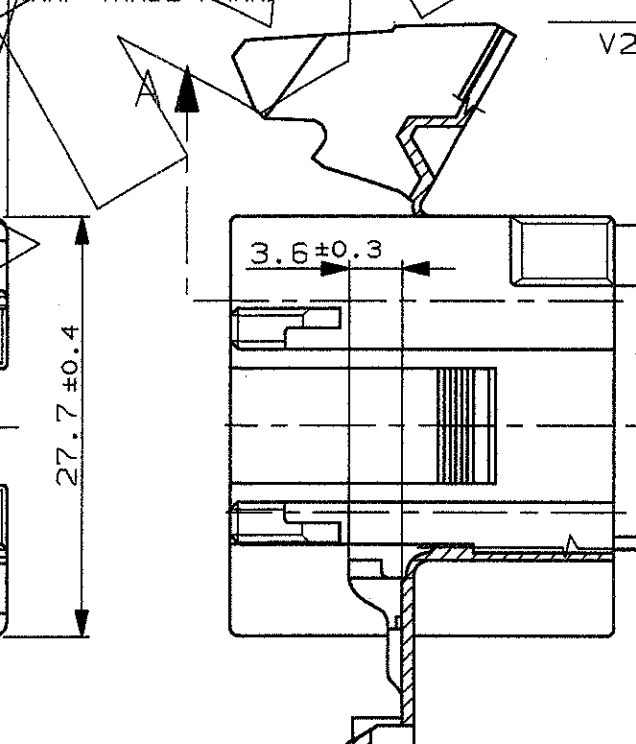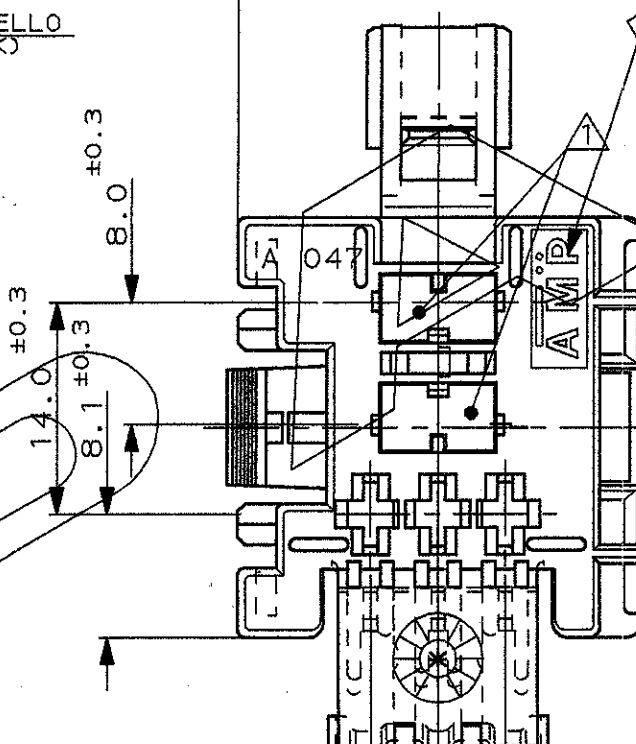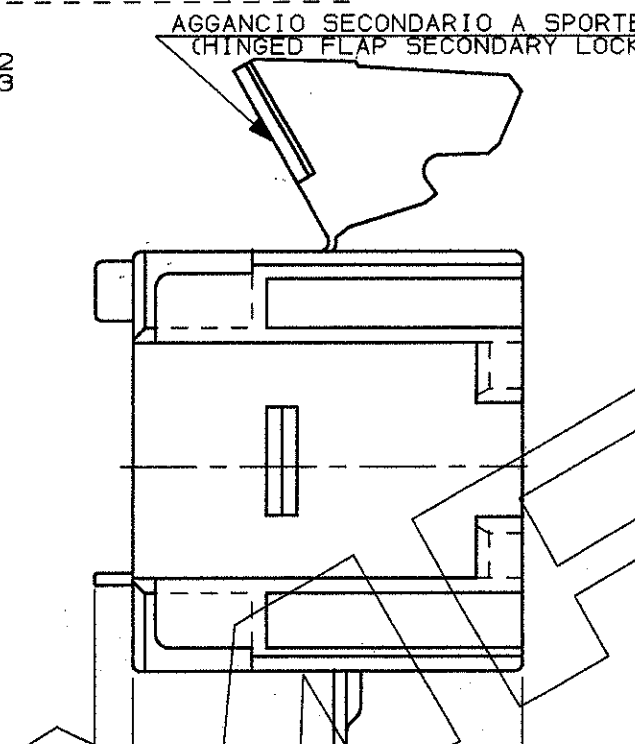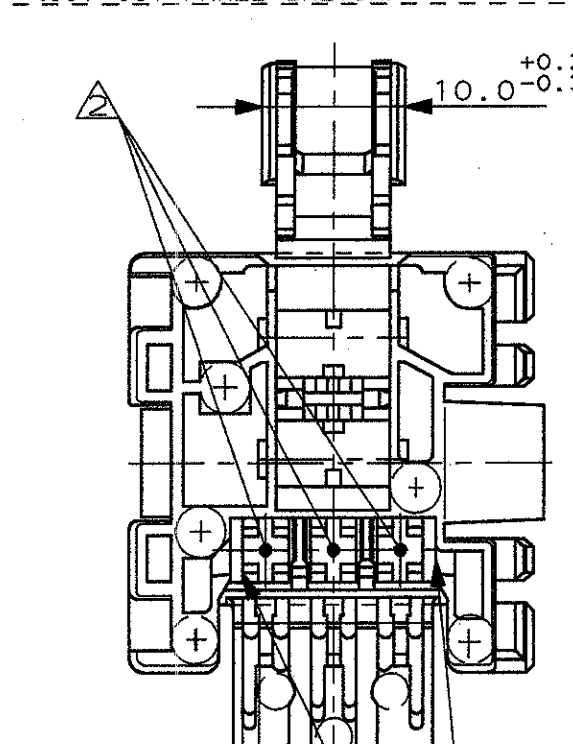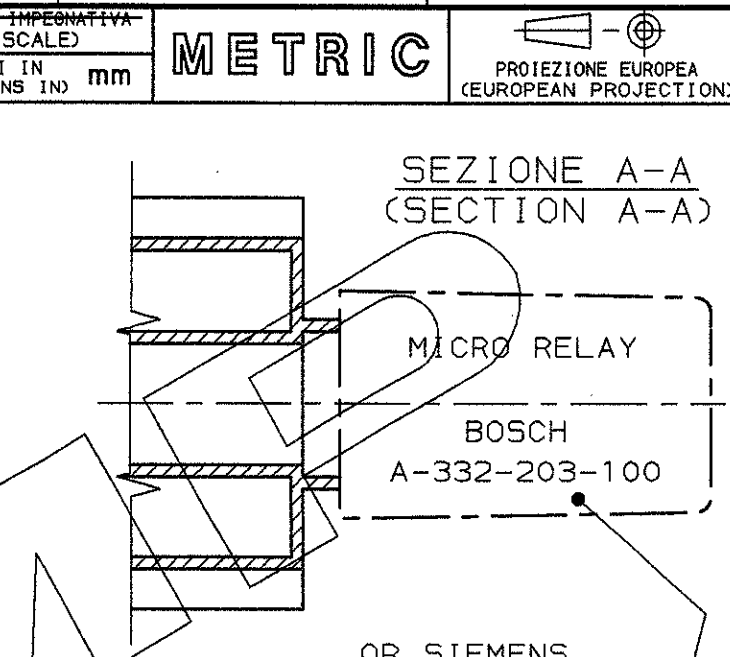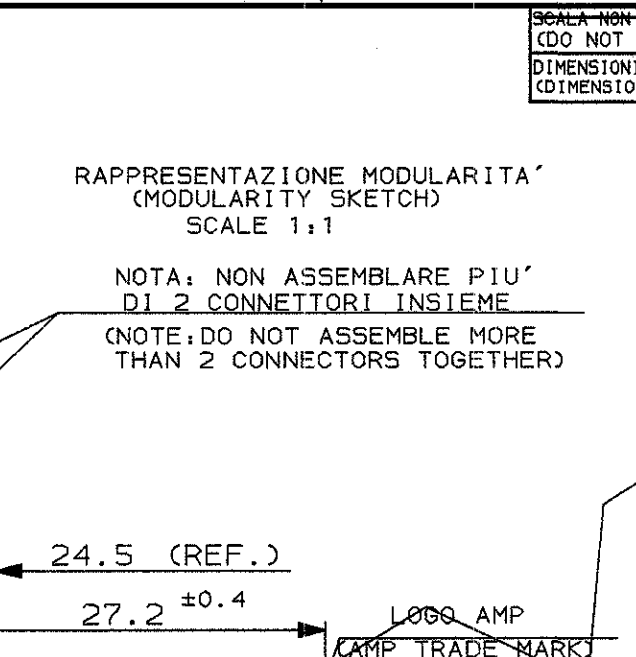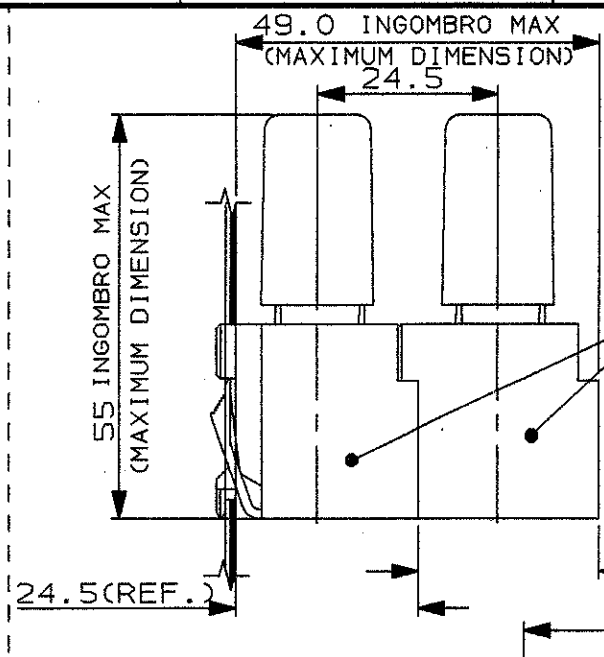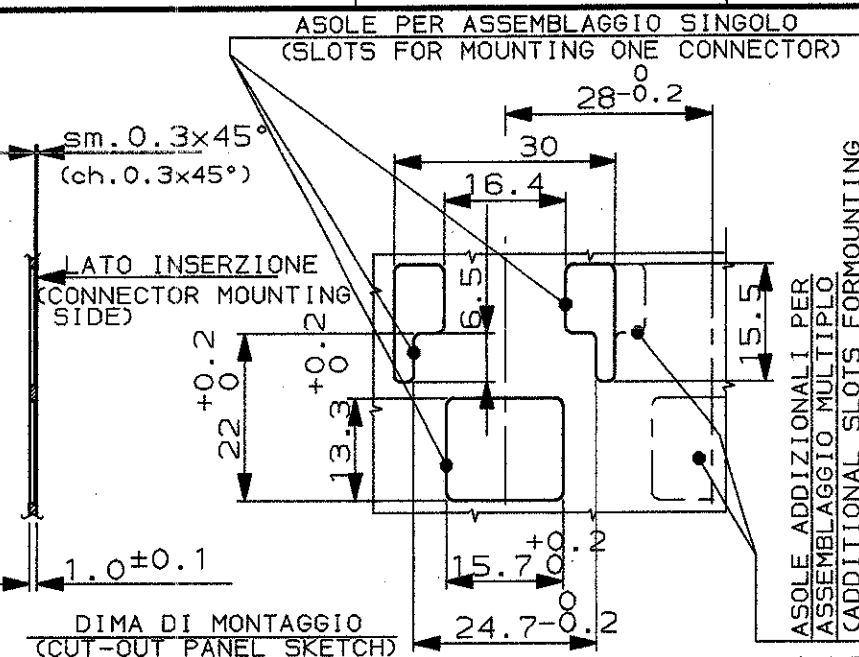

- 1 No. 2 CAVITA' ADATTE PER TERMINALI POSITIVE LOCK MKI SERIE .250, SEZ. 4MM² MAX.
(No. 2 CAVITIES SUITABLE FOR POSITIVE LOCK MKI 250 SRS REC. CONTACT, WIRE
SECTION 4 MM² MAX.)
- 2 No. 3 CAVITA' ADATTE PER TERMINALI JUNIOR POWER TIMER, SEZ. 1.5 MM² MAX.
(No. 3 CAVITIES SUITABLE FOR JUNIOR POWER TIMER REC. CONTACT, WIRE
SECTION 1.5 MM² MAX.)
- 3) SPECIFICA DI PRODOTTO 108-20104; FOGLIO DI ISTRUZIONE 411-20032.
(PRODUCT SPEC. 108-20104, INSTRUCTION SHEET 411-20032).

DISTRIBUZIONE
(PRINT DIST.)

Mouser Electronics

Authorized Distributor

Click to View Pricing, Inventory, Delivery & Lifecycle Information:

[TE Connectivity:](#)

[281988-1](#)