
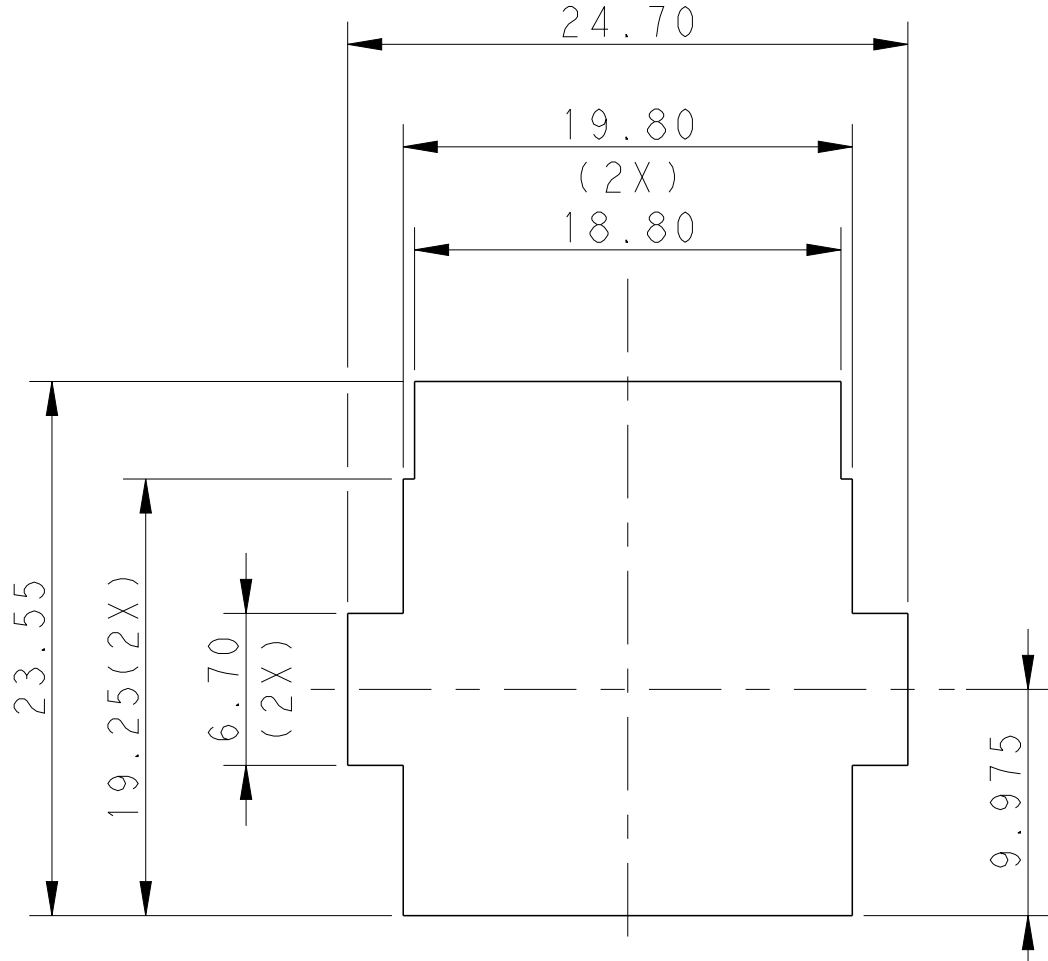
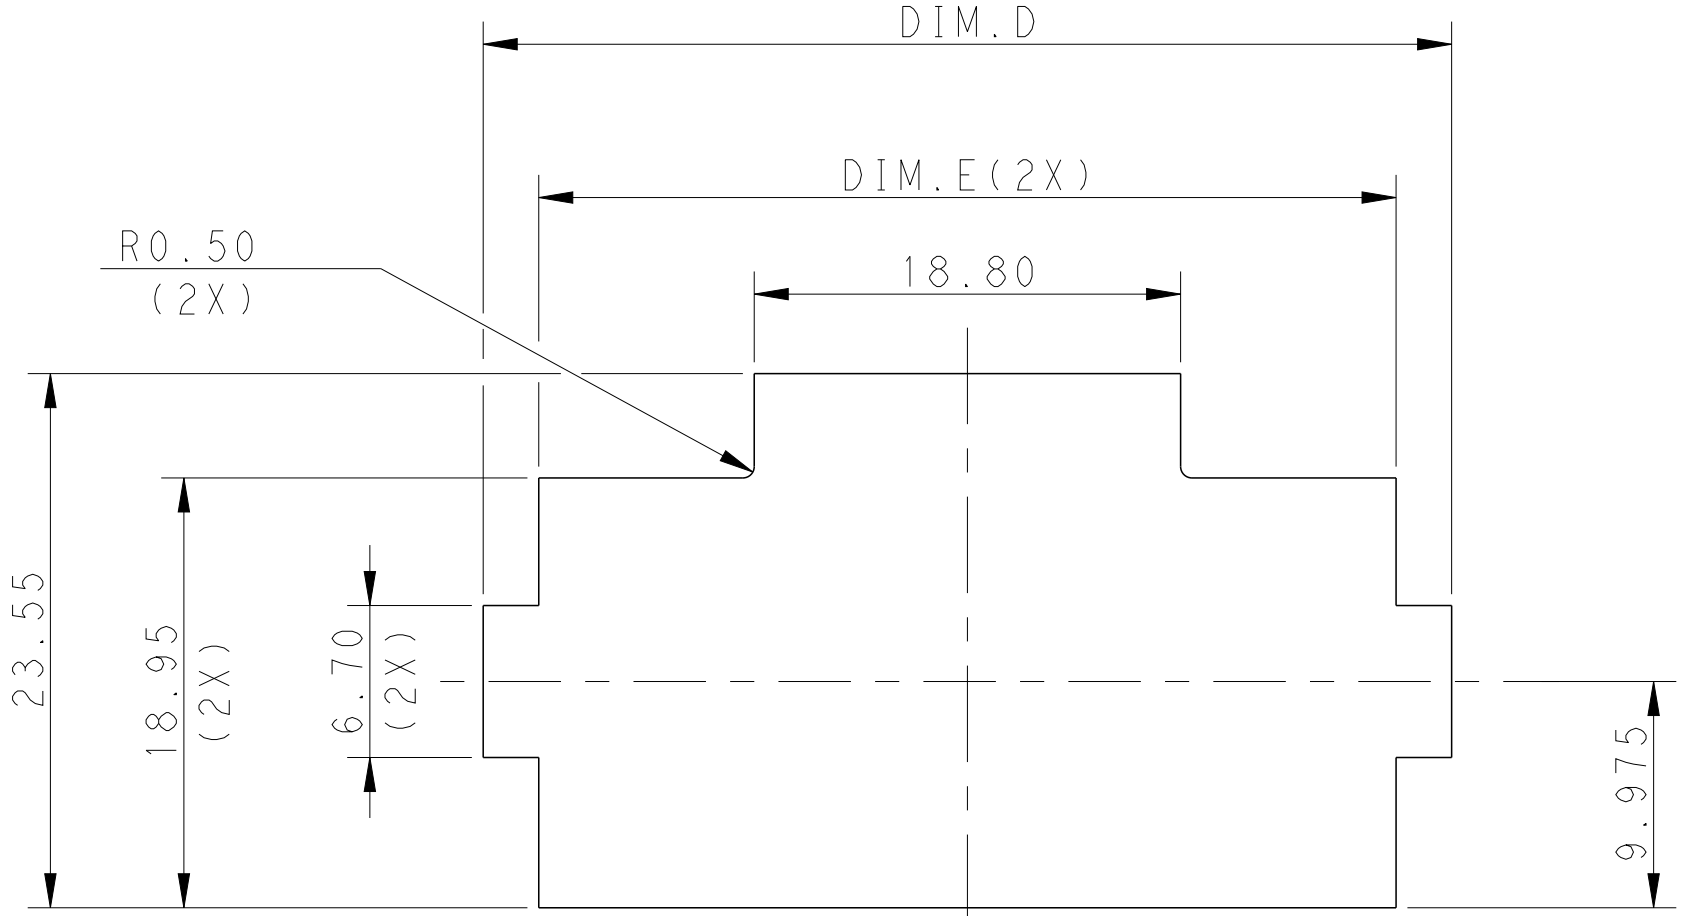






REVISIONS					
LOC	DIST	P	LTR	DESCRIPTION	DATE
-	-	C		REVISED PER ECR-16-003314	15JUL2016

DWN	APVD
BW	GJ

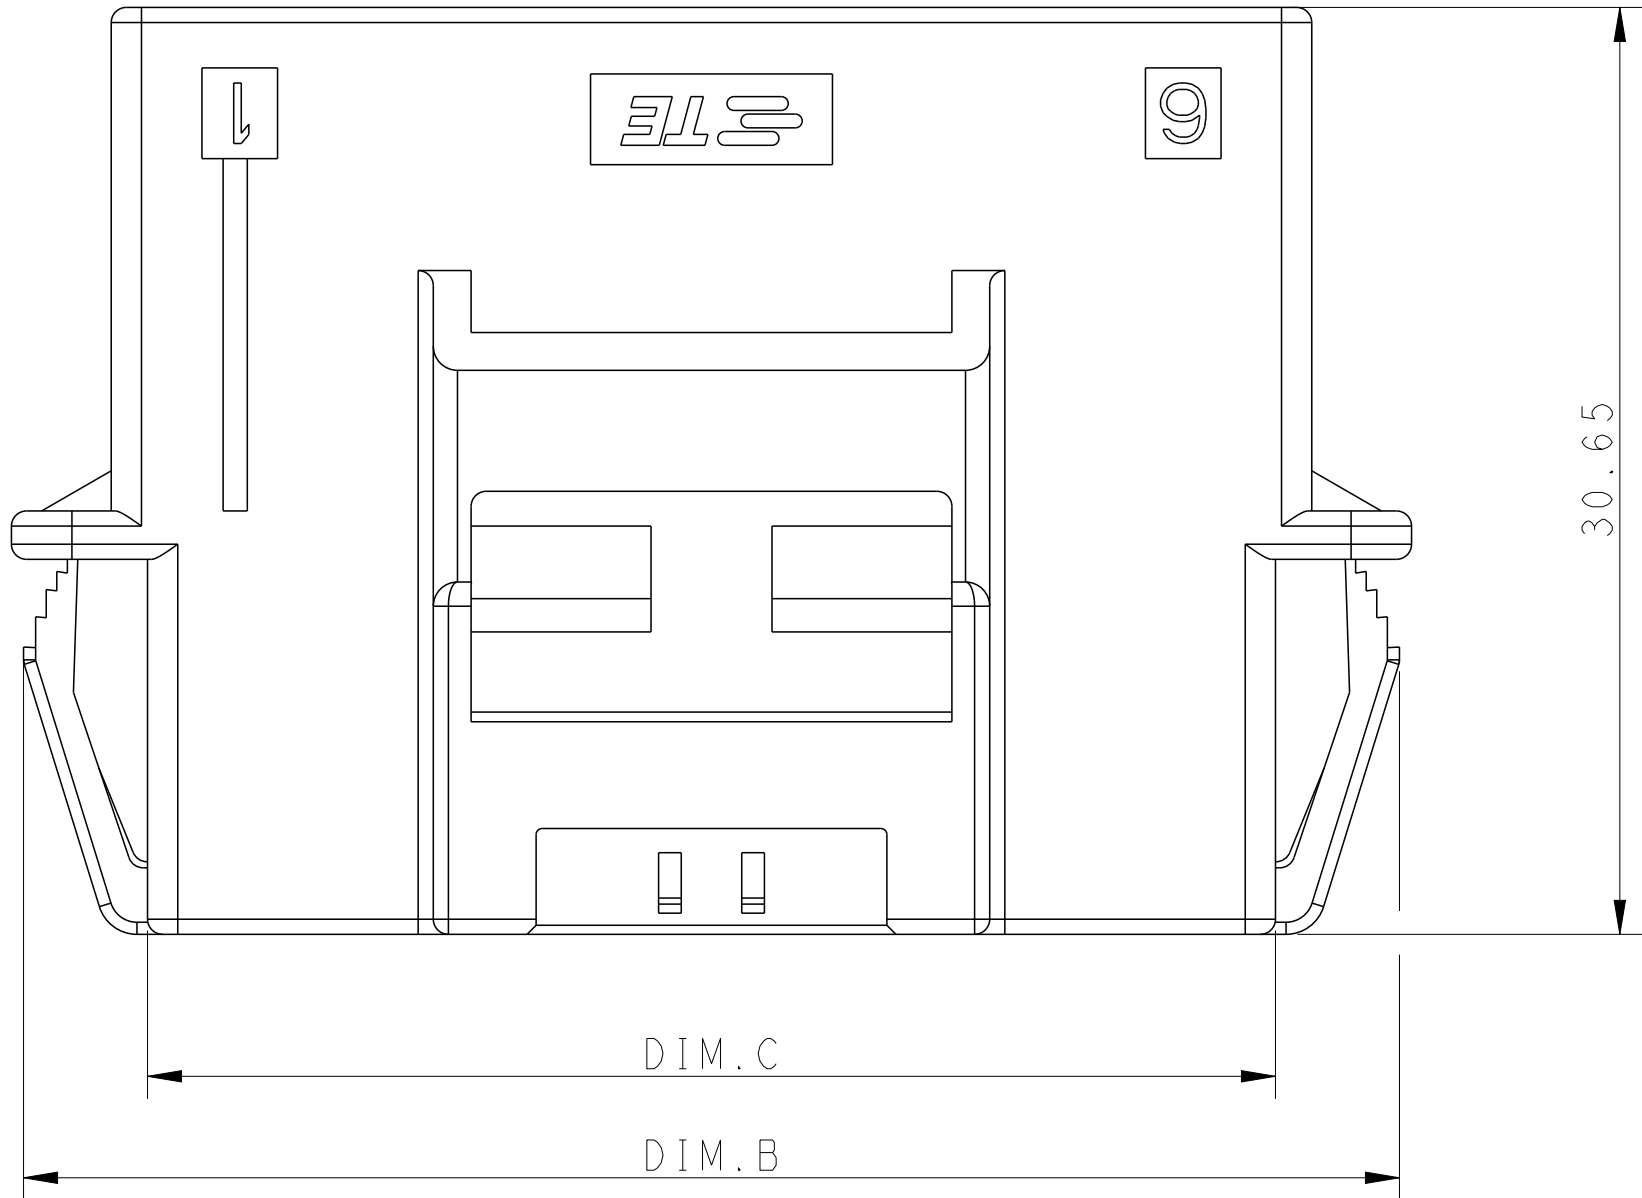

RECOMMENDED PANEL OPENING DEMENSIONS
FOR CAP HOUSING 2*6 AND 2*5 AND 2*4 POSITIONS
(TOLERANCE: ±0.15mm)

RECOMMENDED PANEL OPENING DEMENSIONS
FOR CAP HOUSING 2*3 POSITION
(TOLERANCE: ±0.15mm)

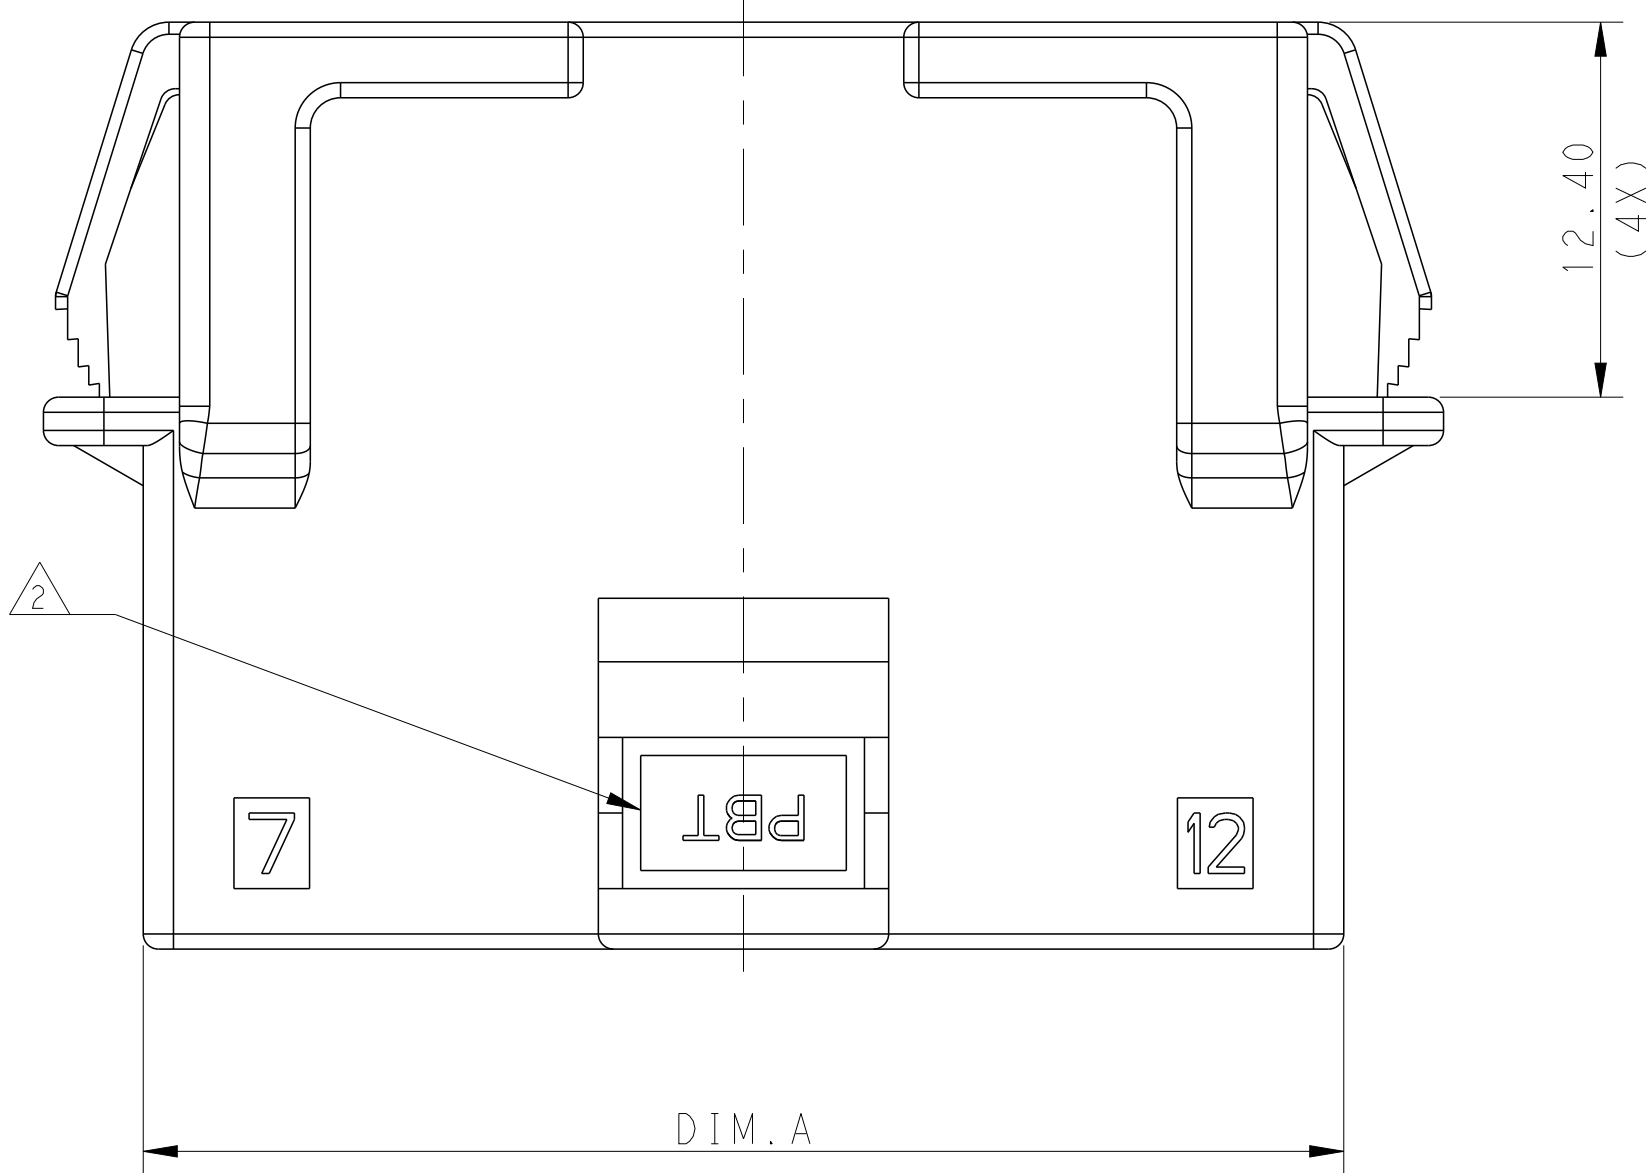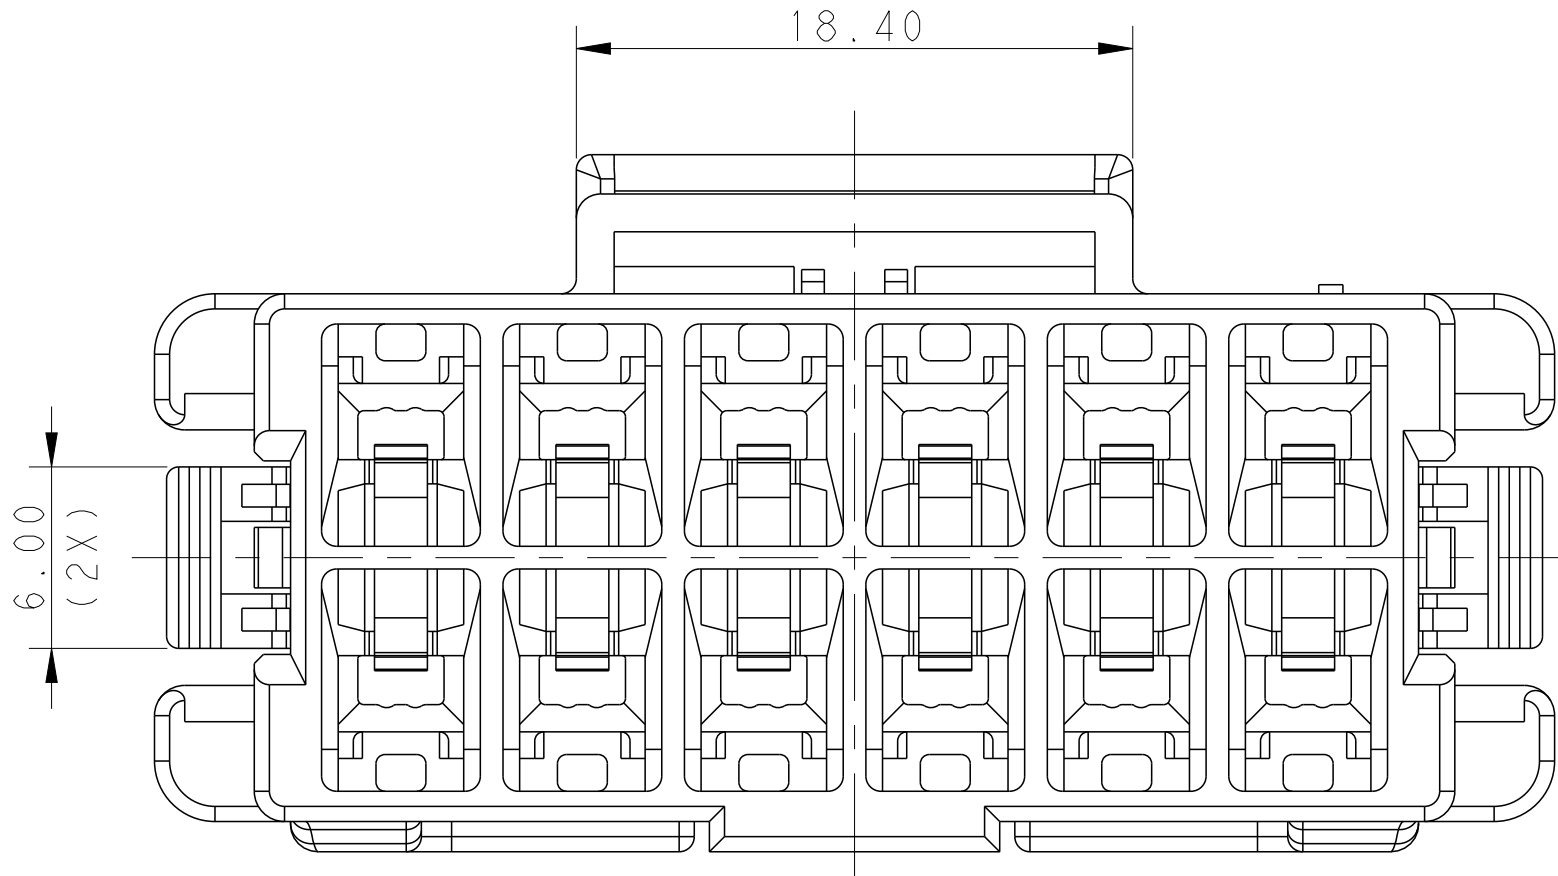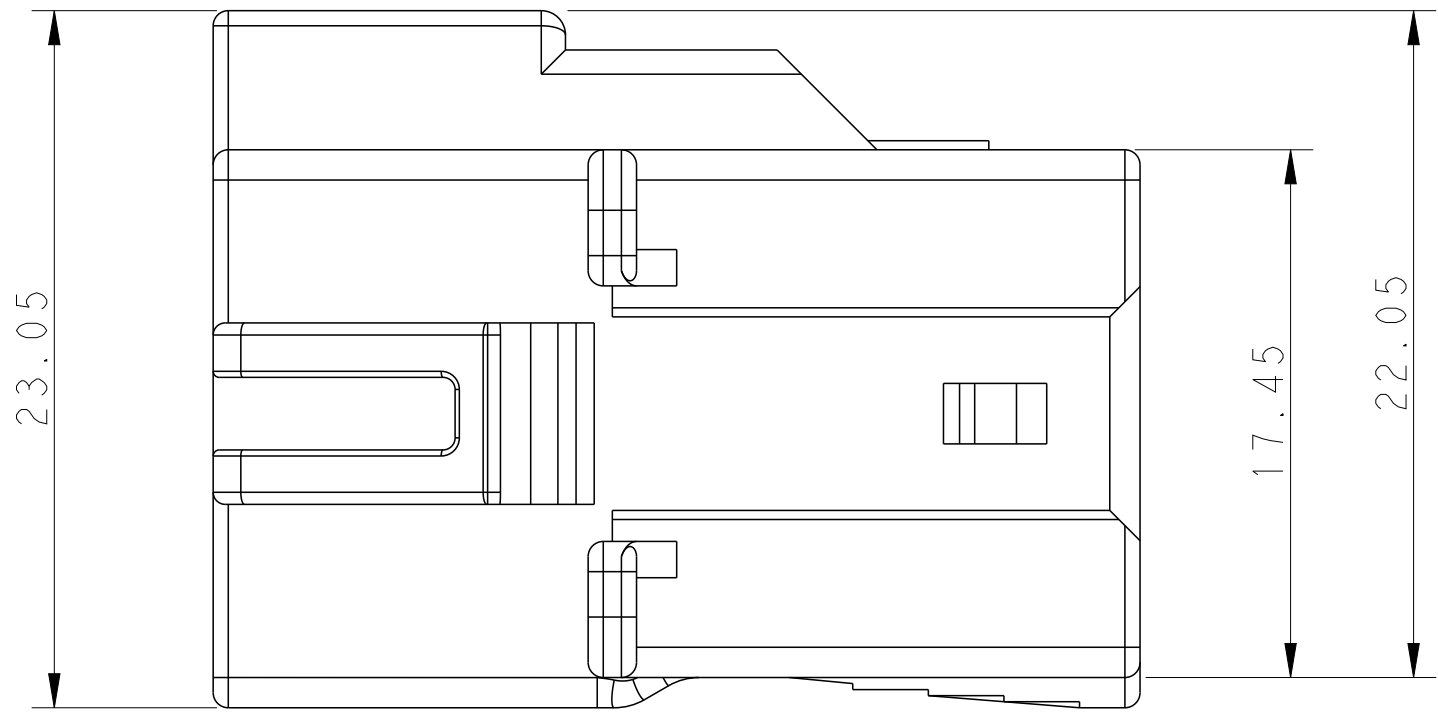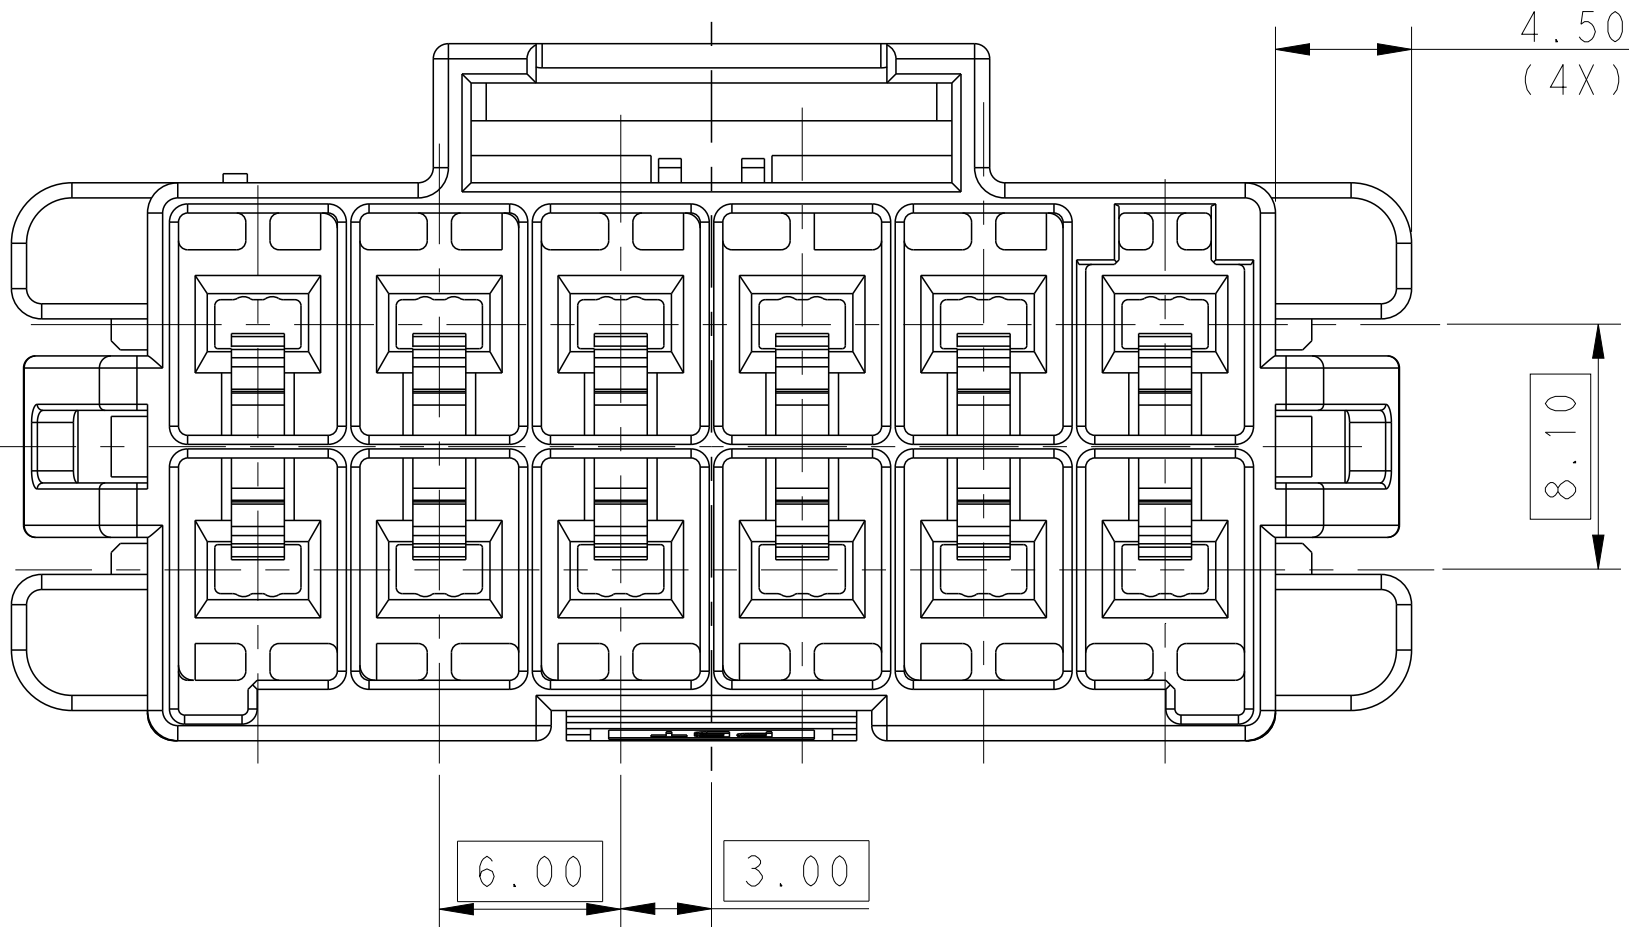

- 1 MATERIAL:
LEVEL 1:PBT, STANDARD TEMPERATURE 105°C
KEY A:NATURAL; KEY B:PURPLE; KEY C:BLUE; KEY D:YELLOW
LEVEL 2:NYLON, HIGH TEMPERATURE 150°C
KEY A:LIGHT GREY; KEY B:RED; KEY C:BLACK; KEY D:NATURAL

- 2 MATERIAL MARK:
LEVEL 1:PBT, LEVEL 2:HDT

- 3 APPLICABLE CONTACT P/N
TAB CONTACT:1971238/1971780/82/84/86/88-*,2238067-*

- 4 MATING CONN, P/N
PLUG HSG: *-1971776-
TPA(LOCK PLATE): *-1971778-*



- 5 RECOMMENDED PANEL THICKNESS:1.0-2.0mm

- 6 THIS PRODUCT HAS NOT COMPLETED VALIDATION TESTING





POS	A	B	C	D	E
2*6	39.70	45.5	37.30	42.70	37.80
2*5	33.70	39.5	31.30	36.70	31.80
2*4	27.70	33.5	25.30	30.70	25.80
2*3	21.70	27.5	19.30		

THIS DRAWING IS A CONTROLLED DOCUMENT.		DWN TOMMY WU 06JUL2012	TE Connectivity	
DIMENSIONS:		CHK HAPYE WU 06JUL2012		
mm		APVD YUHONG MAO 06JUL2012	NAME CAP HOUSING,PANEL MOUNT,DOUBLE ROW POWER TRIPLE LOCK	
TOLERANCES UNLESS OTHERWISE SPECIFIED:		PRODUCT SPEC 108-106118	SIZE CAGE CODE DRAWING NO 114-106118	
MATERIAL		APPLICATION SPEC 114-106118	RESTRICTED TO	
FINISH		WEIGHT	A100779C=1971775	
1		Customer Drawing	SCALE -	
			SHEET 1 OF 2	
			REV C	



LOC		DIST		REVISIONS			
P	LYR	DESCRIPTION			DATE	OWN	APVD
-	-	SEE SHEET 1			-	-	-

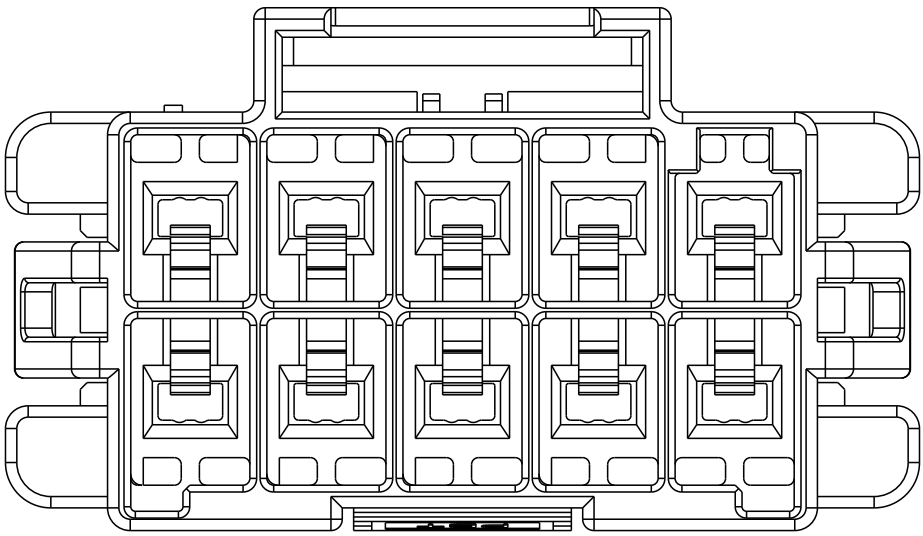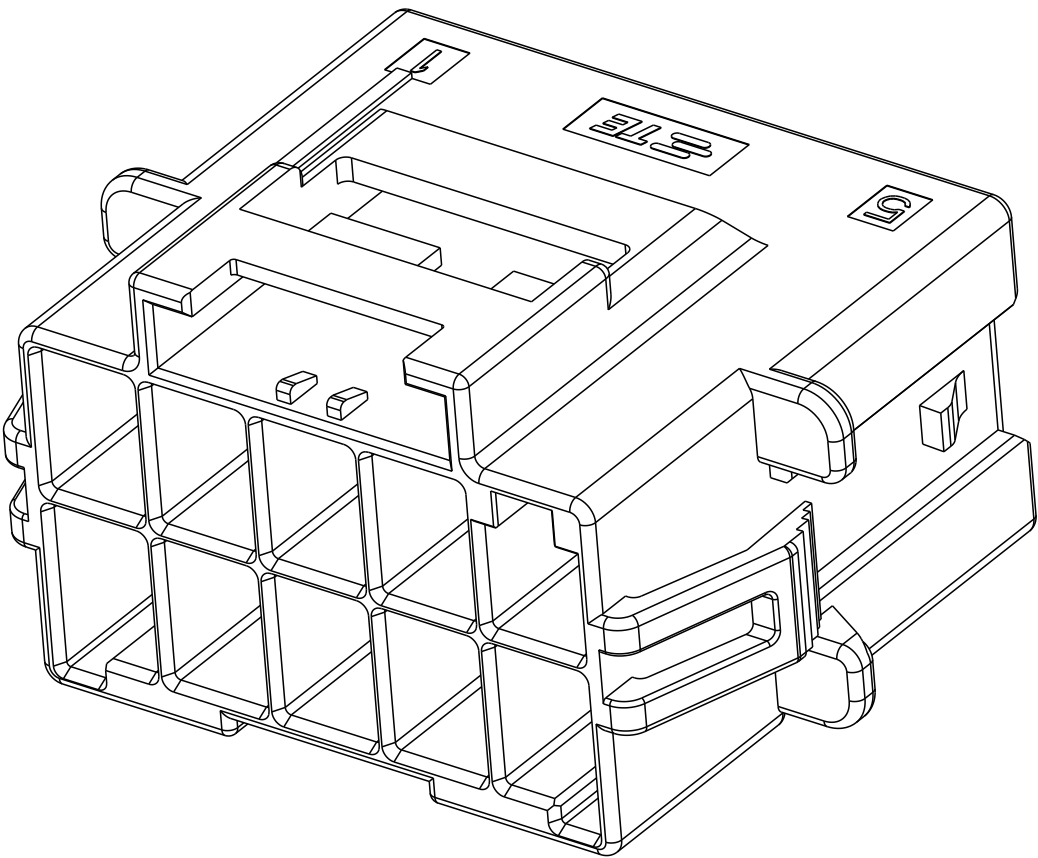





2*5 POSITIONS

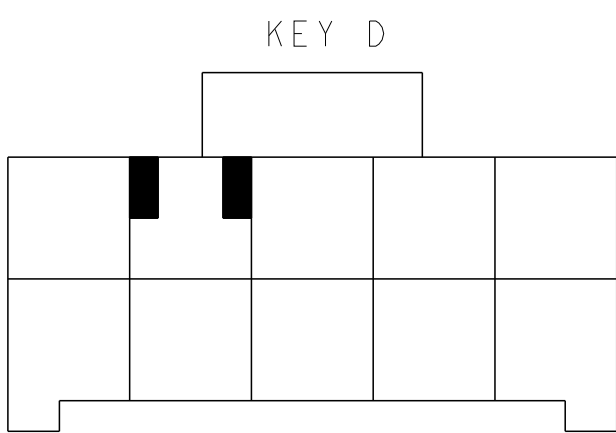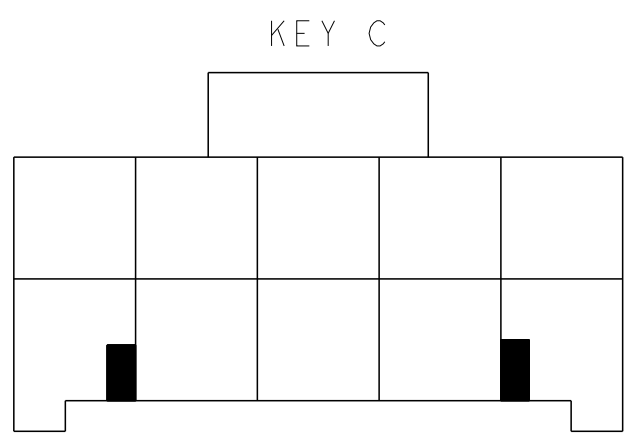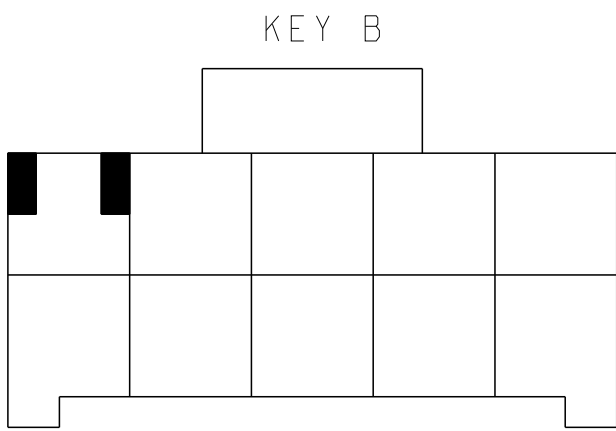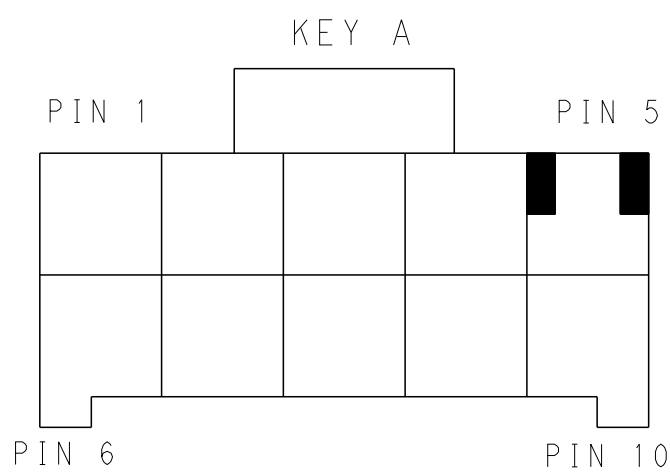



KEYING FOR 2*5 POS.

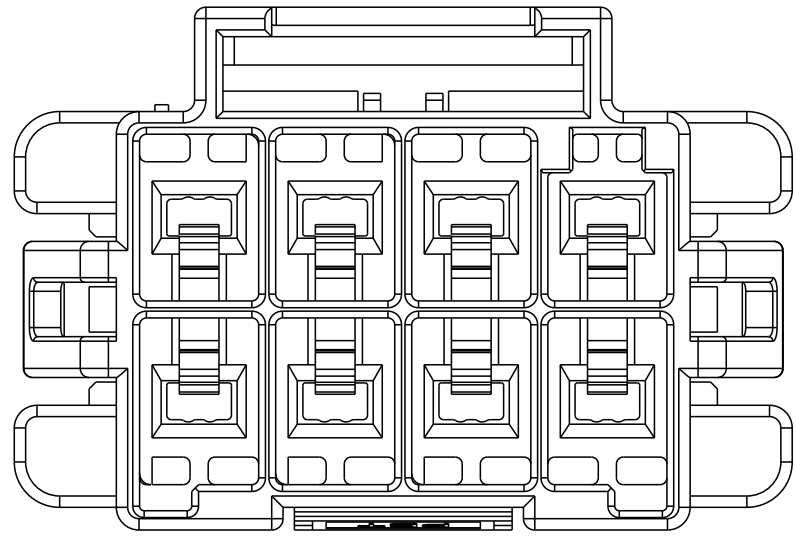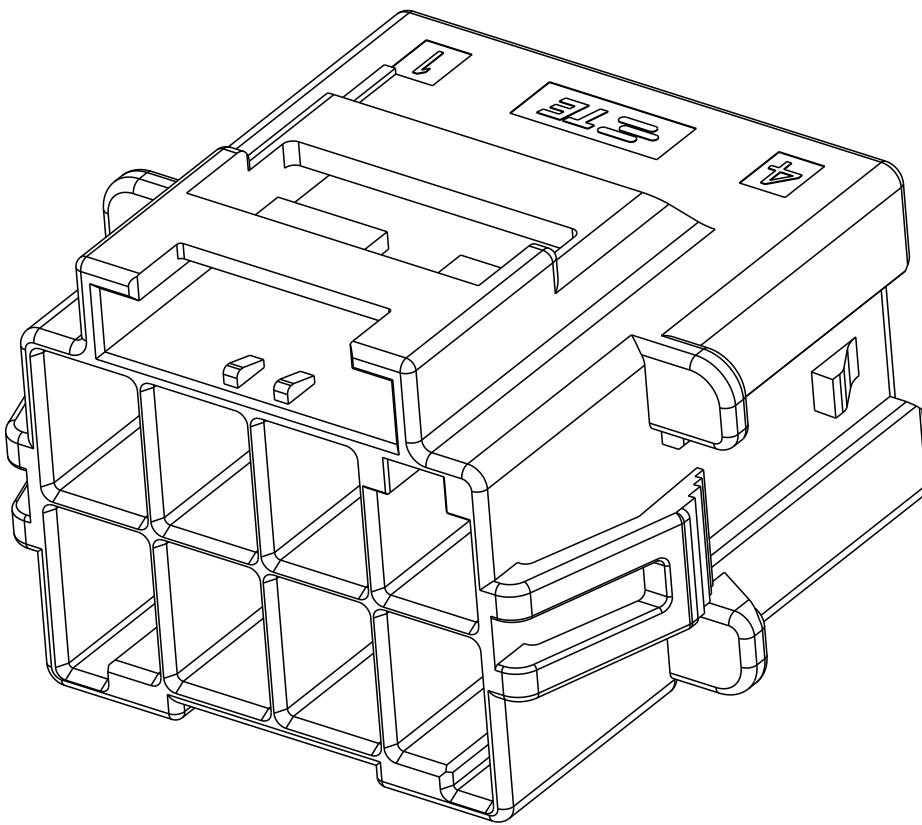





2*4 POSITIONS

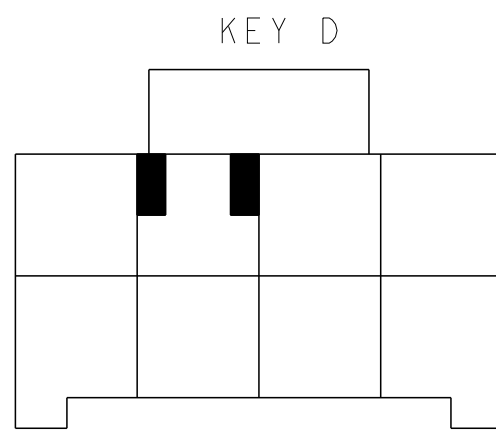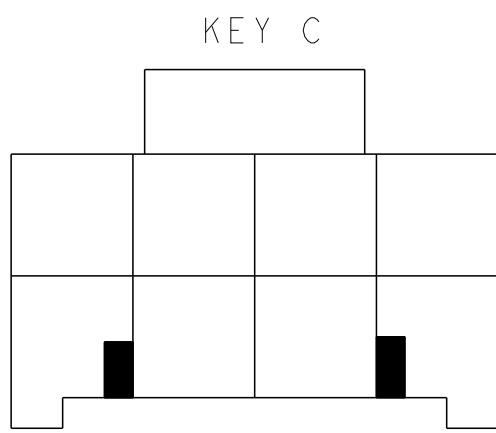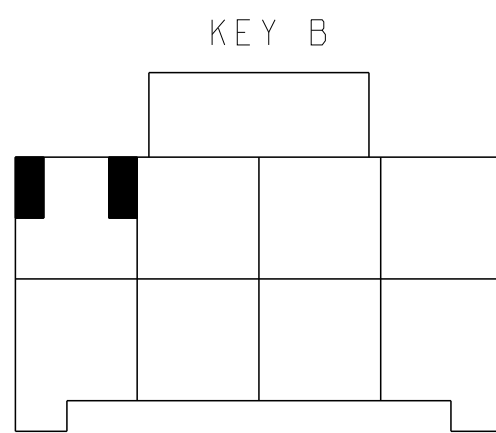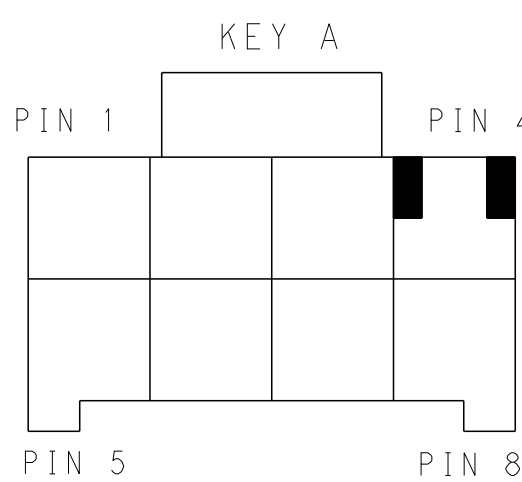



KEYING FOR 2*4 POS.

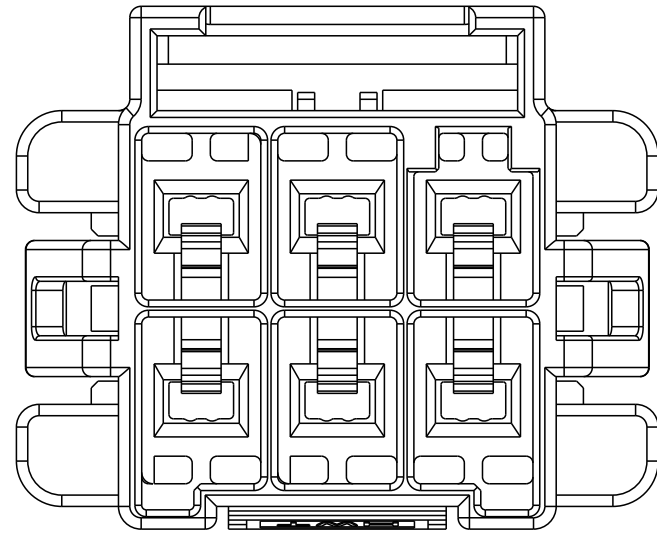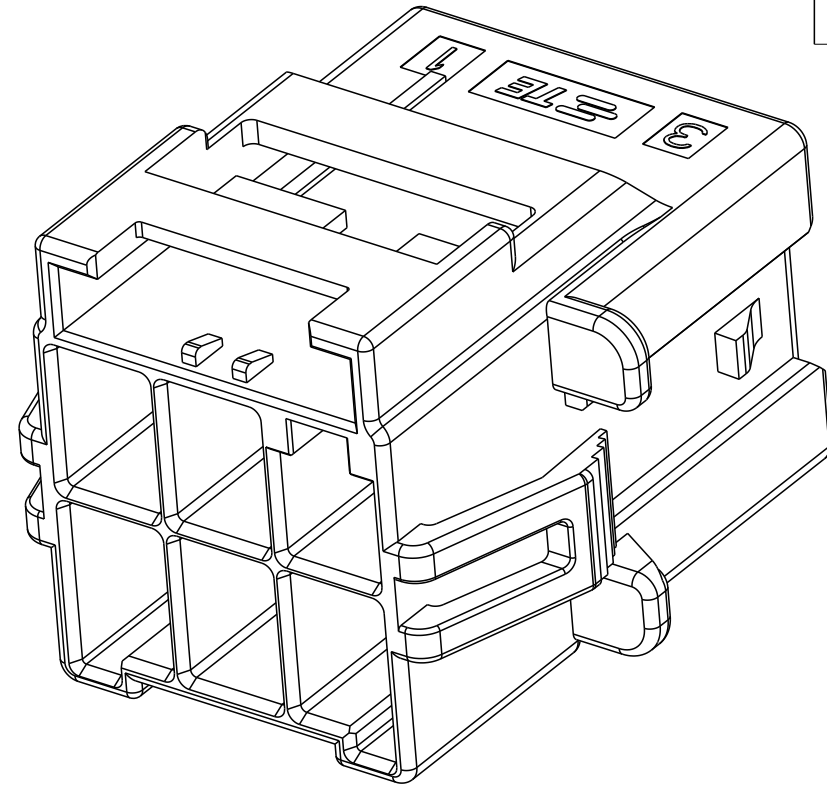





2*3 POSITIONS

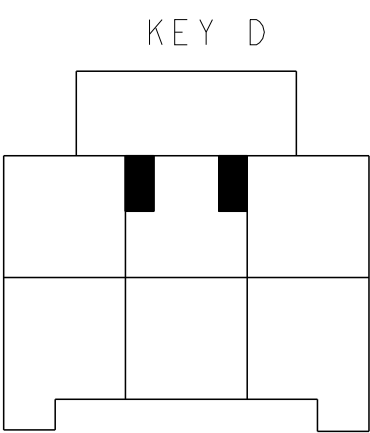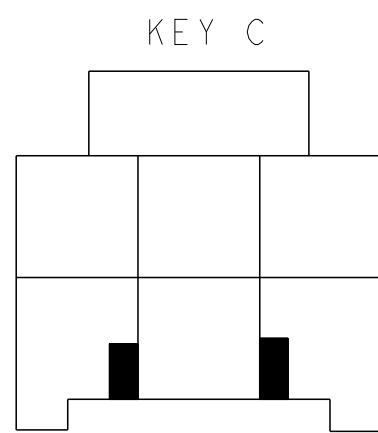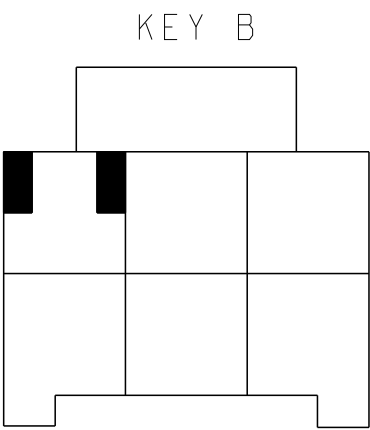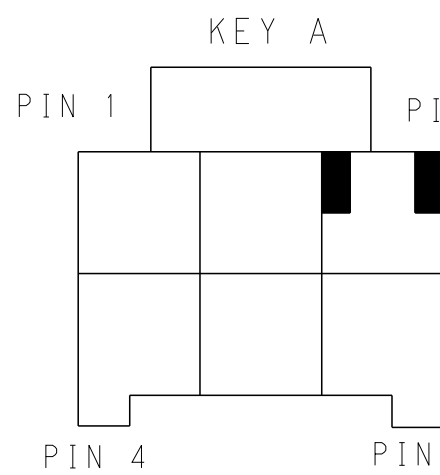

KEYING FOR 2*3 POS.

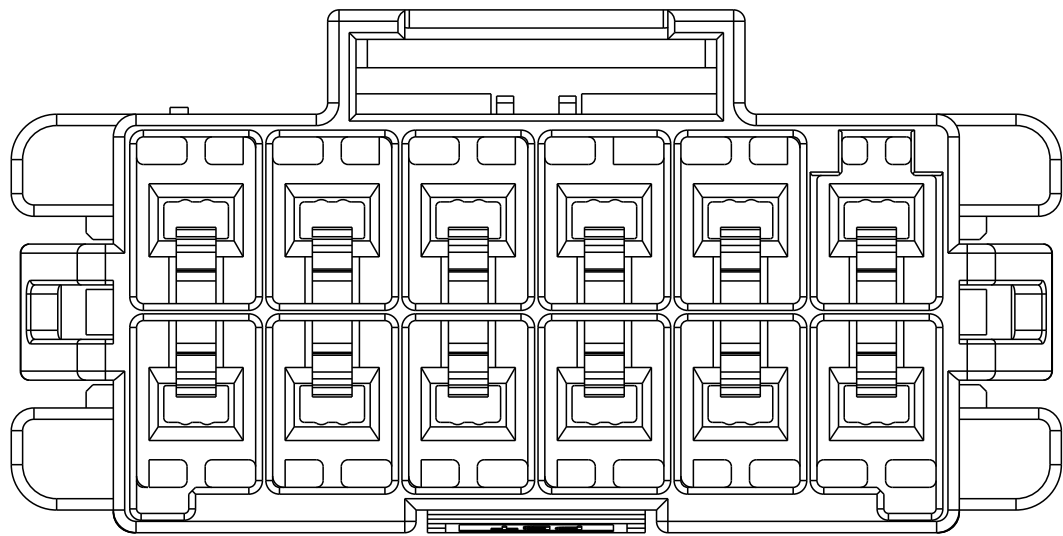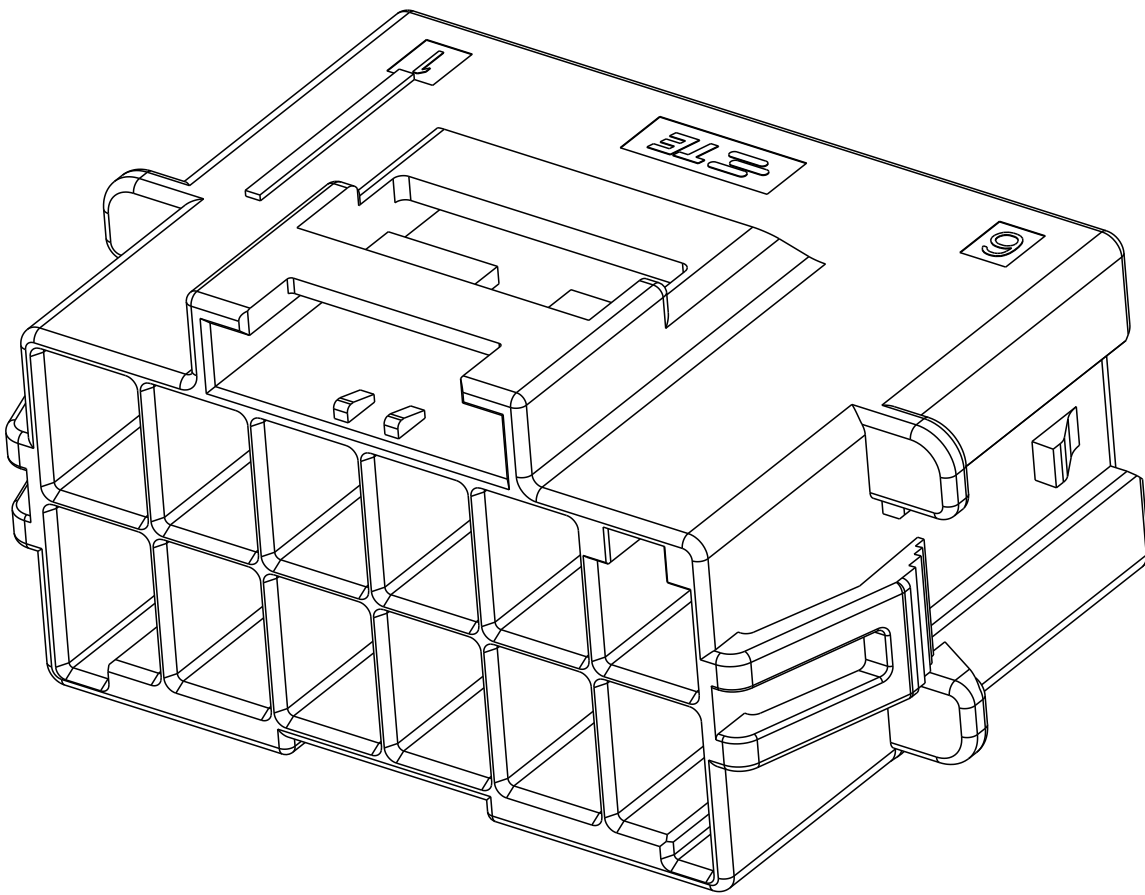

2*6 POSITIONS

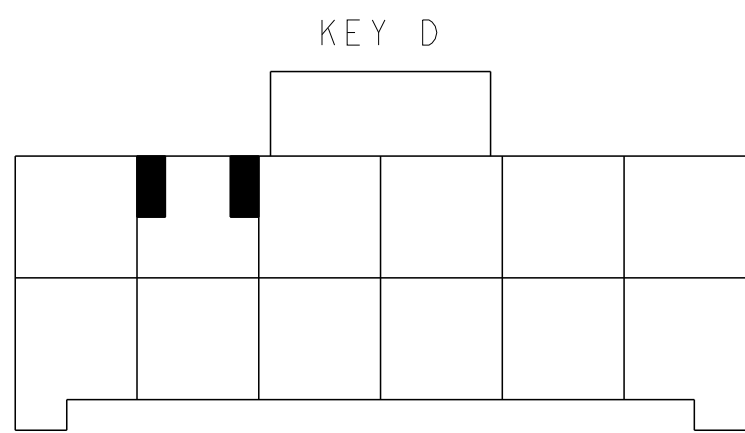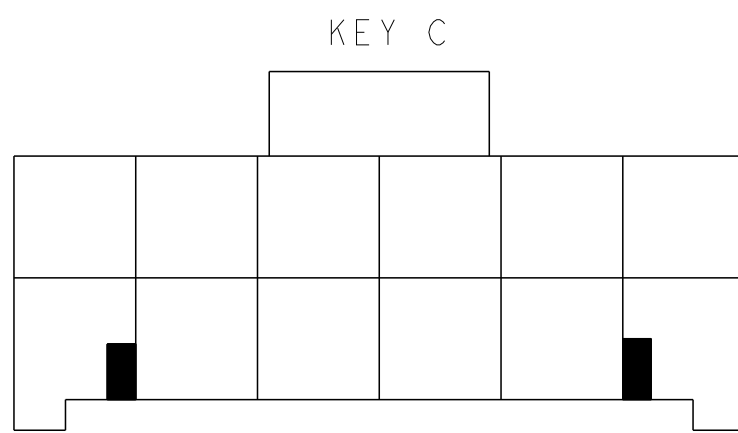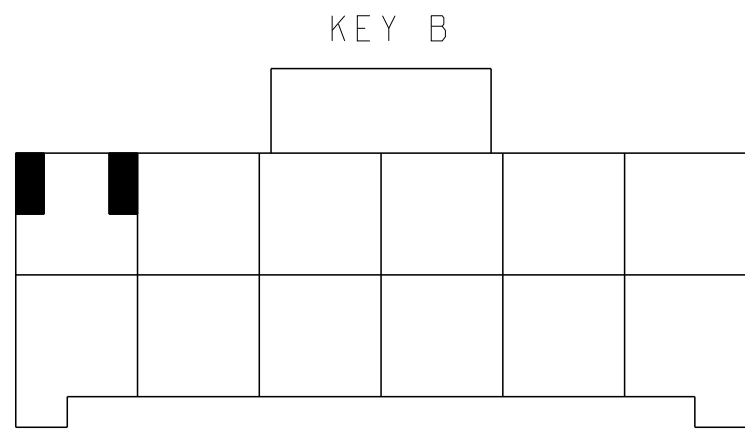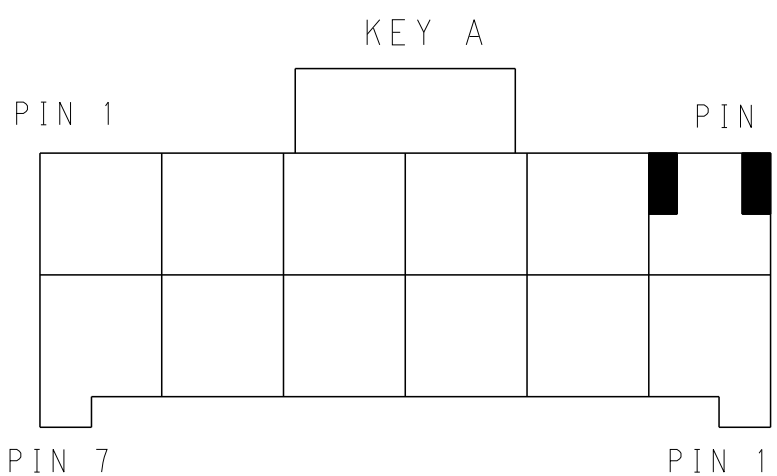

KEYING FOR 2*6 POS.

2*6	LEVEL 1	KEY A	1-1971775-6
		KEY B	2-1971775-6
	LEVEL 2	KEY C	3-1971775-6
		KEY D	4-1971775-6
2*5	LEVEL 1	KEY A	5-1971775-6
		KEY B	6-1971775-6
	LEVEL 2	KEY C	7-1971775-6
		KEY D	8-1971775-6
POS.	MATERIAL	KEY	P/N

2*4	LEVEL 1	KEY A	1-1971775-4
		KEY B	2-1971775-4
	LEVEL 2	KEY C	3-1971775-4
		KEY D	4-1971775-4
2*3	LEVEL 1	KEY A	5-1971775-4
		KEY B	6-1971775-4
	LEVEL 2	KEY C	7-1971775-4
		KEY D	8-1971775-4
POS.	MATERIAL	KEY	P/N

THIS DRAWING IS A CONTROLLED DOCUMENT.		OWN TOMMY WU 06JUL2012	TE Connectivity	
DIMENSIONS:		CHK HAPYE WU 06JUL2012		
mm		APVD YUHONG MAO 06JUL2012	NAME CAP HOUSING, PANEL MOUNT, DOUBLE ROW POWER TRIPLE LOCK	
		PRODUCT SPEC	SIZE CAGE CODE DRAWING NO	
		108-106118		
		APPLICATION SPEC	RESTRICTED TO	
		114-106118		
MATERIAL		WEIGHT	A1 00779C=1971775	
		Customer Drawing	SCALE - SHEET 2 OF 2 REV C	

Mouser Electronics

Authorized Distributor

Click to View Pricing, Inventory, Delivery & Lifecycle Information:

[TE Connectivity:](#)

[2-1971775-3](#)