
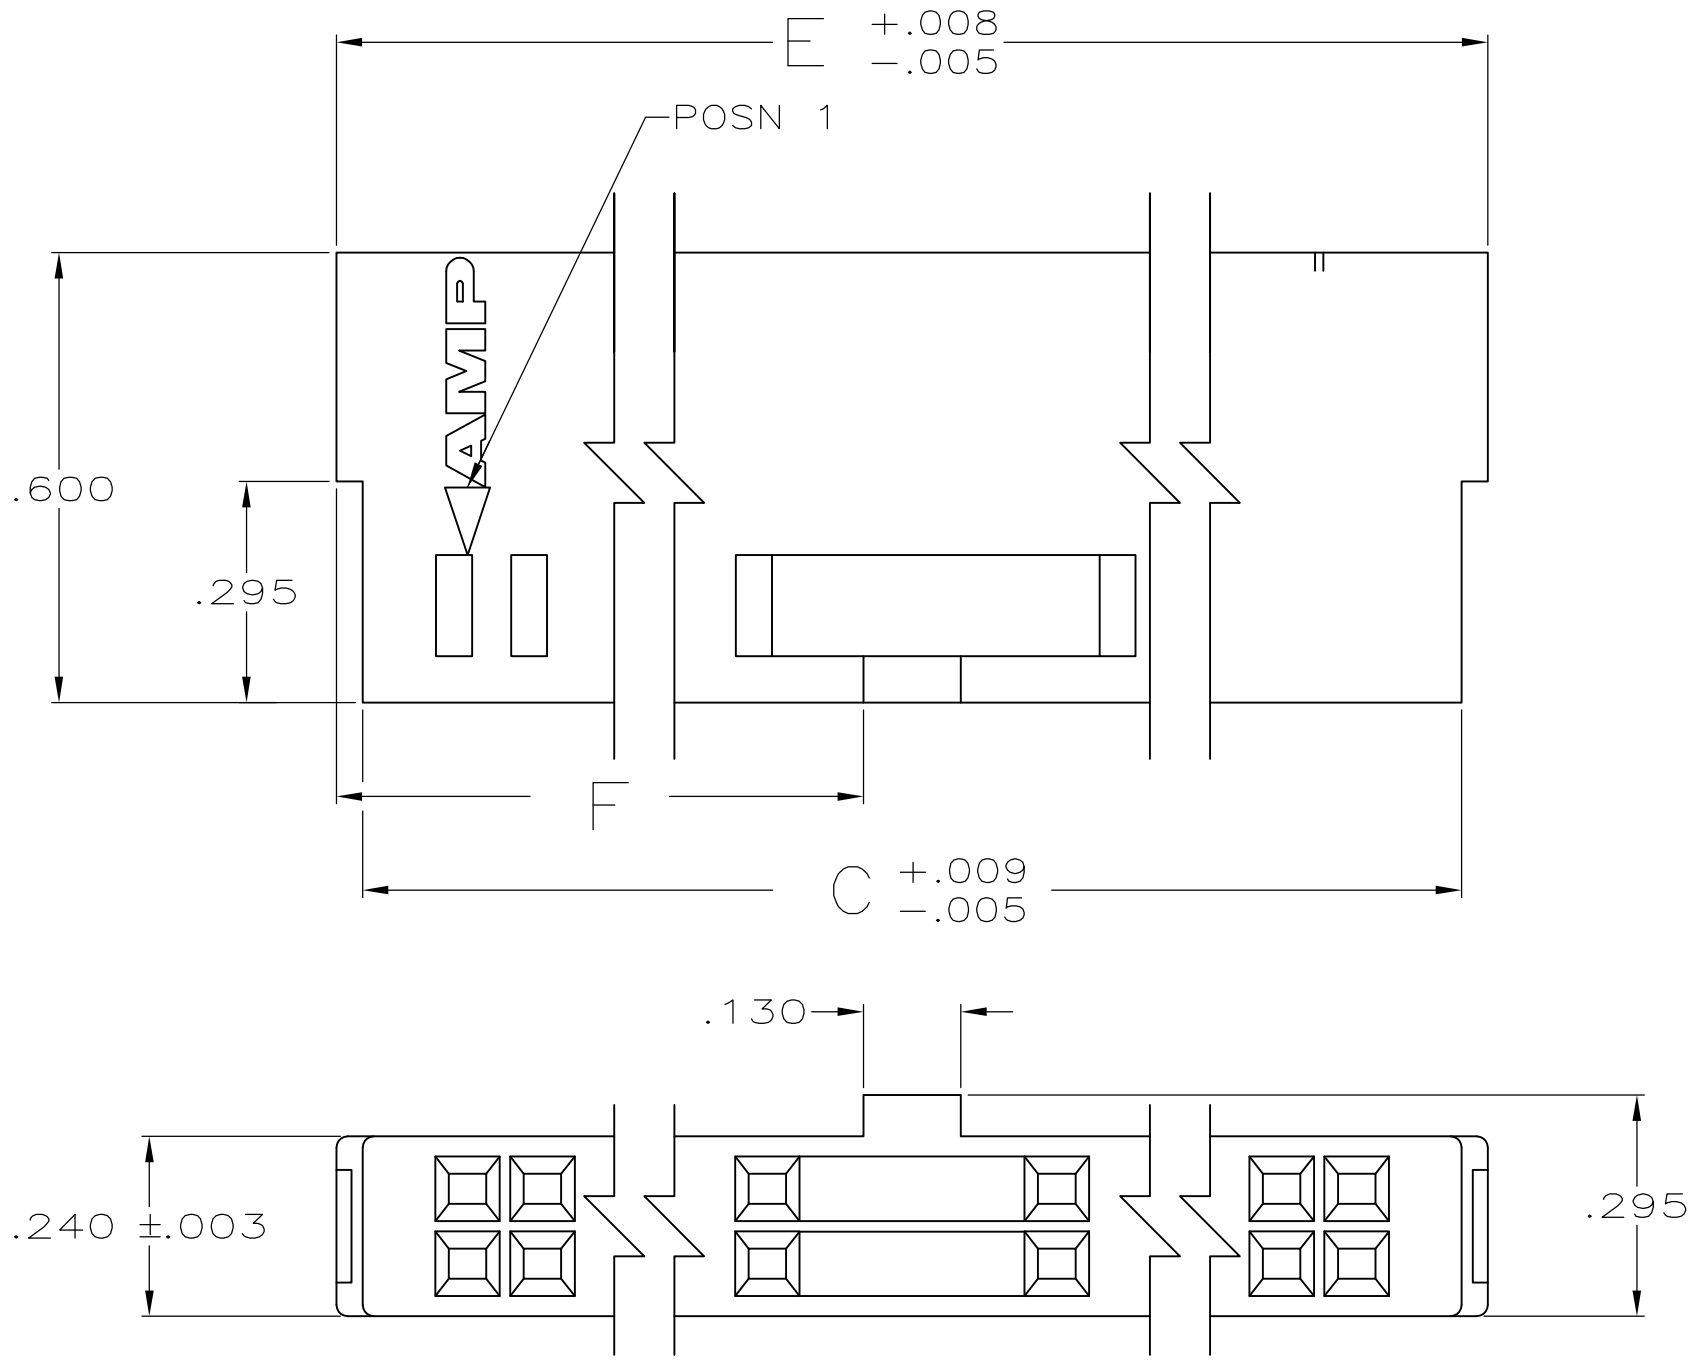


THIS DRAWING IS UNPUBLISHED. RELEASED FOR PUBLICATION  
 © COPYRIGHT - By - ALL RIGHTS RESERVED.

| LOC |     | DIST        |                           | REVISIONS |         |      |     |
|-----|-----|-------------|---------------------------|-----------|---------|------|-----|
| P   | LTR | DESCRIPTION |                           | DATE      | DWN     | APVD |     |
| AR  | 39  | J1          | REVISED PER ECO-11-004835 |           | 11MAR11 | RK   | HMR |

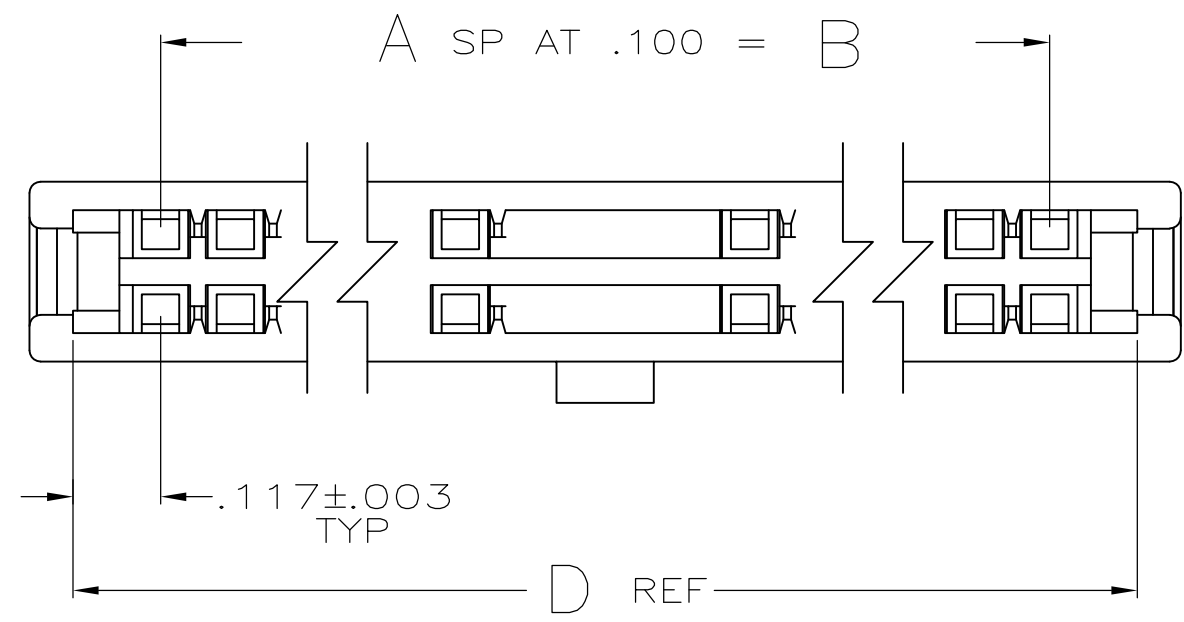

- 1 HOUSING WILL ACCOMMODATE FLEXIBLE FLAT CABLE ON .100 CENTERS AND/OR #22-32 AWG WIRE WITH INSULATION RANGE OF .025 TO .056
- 2 HOUSING WILL INTERFACE WITH MOD II LOW PROFILE SHROUDED HEADERS AND AMPLATCH UNIVERSAL EJECTION STYLE PIN HEADER ASSEMBLIES WITH LATCH DIMENSIONS OF A=.576
- 3 BRIGHT TIN-LEAD PLATED CONTACTS ARE NOT RECOMMENDED FOR USE IN THIS HOUSING OVER 40 POSITIONS

|          |       |       |       |       |       |    |            |             |
|----------|-------|-------|-------|-------|-------|----|------------|-------------|
| OBSOLETE | 1.660 | 3.450 | 3.334 | 3.380 | 3.100 | 31 | 64         | 1-487223-6  |
|          | 1.560 | 3.250 | 3.134 | 3.180 | 2.900 | 29 | 60         | 1-487223-5  |
| OBSOLETE | 1.460 | 3.050 | 2.934 | 2.980 | 2.700 | 27 | 56         | 1-487223-4  |
| OBSOLETE | 1.410 | 2.950 | 2.834 | 2.880 | 2.600 | 26 | 54         | 1-487223-3  |
|          | 1.310 | 2.750 | 2.634 | 2.680 | 2.400 | 24 | 50         | 1-487223-2  |
| OBSOLETE | 1.160 | 2.450 | 2.334 | 2.380 | 2.100 | 21 | 44         | 1-487223-1  |
|          | 1.060 | 2.250 | 2.134 | 2.180 | 1.900 | 19 | 40         | 1-487223-0  |
|          | .910  | 1.950 | 1.834 | 1.880 | 1.600 | 16 | 34         | 487223-9    |
|          | .810  | 1.750 | 1.634 | 1.680 | 1.400 | 14 | 30         | 487223-8    |
|          | .710  | 1.550 | 1.434 | 1.480 | 1.200 | 12 | 26         | 487223-7    |
|          | .660  | 1.450 | 1.334 | 1.380 | 1.100 | 11 | 24         | 487223-6    |
|          | .560  | 1.250 | 1.134 | 1.180 | .900  | 9  | 20         | 487223-5    |
| OBSOLETE | .510  | 1.150 | 1.034 | 1.080 | .800  | 8  | 18         | 487223-4    |
|          | .460  | 1.050 | .934  | .980  | .700  | 7  | 16         | 487223-3    |
|          | .410  | .950  | .834  | .880  | .600  | 6  | 14         | 487223-2    |
|          | .310  | .750  | .634  | .680  | .400  | 4  | 10         | 487223-1    |
|          | F     | E     | D     | C     | B     | A  | NO OF POSN | PART NUMBER |

THIS DRAWING IS A CONTROLLED DOCUMENT.

DWN H MOLL 8-4-88  
 CHK G D MILLER 8-4-88  
 APVD G D MILLER 8-4-88

**STE** TE Connectivity

NAME: HOUSING, RECEPTACLE, FFC .100X.100 CENTERLINE, DOUBLE ROW

SIZE: A2 CAGE CODE: 00779 DRAWING NO: C=487223 RESTRICTED TO: -

MATERIAL: FLAME RETARDANT THERMOPLASTIC; COLOR-BLACK FINISH: - WEIGHT: -

CUSTOMER DRAWING SCALE: 4:1 SHEET: 1 OF 1 REV: J1

# Mouser Electronics

Authorized Distributor

Click to View Pricing, Inventory, Delivery & Lifecycle Information:

[TE Connectivity:](#)

[487223-9](#)