


THIS COPY IS PROVIDED ON A RESTRICTED BASIS AND IS NOT TO BE USED IN ANY WAY DETRIMENTAL TO THE INTERESTS OF PANDUIT CORP.

PANDUIT PART NUMBER	STUD SIZE	DIMENSIONS in.				
		A $\pm .020$	W $\pm .010$	C MIN.	M $\pm .020$	H $\pm .010$
P14-6RHT6	#6	.62 (15.75)	.25 (6.35)	.20 (5.08)	.50 (12.70)	.15 (3.81)
P14-8RHT6	#8	.71 (18.03)	.31 (7.87)	.25 (6.35)	.55 (13.97)	.17 (4.32)
P14-10RHT6	#10	.71 (18.03)	.31 (7.87)	.25 (6.35)	.55 (13.97)	.20 (5.08)

NOTES:

1. RECOMMENDED FOR:
 - A. #18-14 AWG SOLID OR STRANDED
COPPER WIRE
 - B. 650° F (343° C) MAX. TEMP. RATING
2. MATERIAL:
 - A. STAMPING- .03" (.76) THK COPPER,
NICKEL PLATED
3. PACKAGE QTY: STD. PKG. -C=100
BULK PKG. -M=1000
4. DIMENSIONS IN BRACKETS ARE IN MILLIMETERS
5. INSTALLATION TOOLS:
 - A. PANDUIT APPROVED: CT-100, CT-200, CT-160
CT-260, CT-570, CT-1570
6. WIRE STRIP LENGTH: 9/32 ^{+1/32}_{-.0} (7.1 ⁺⁸_{-.0})

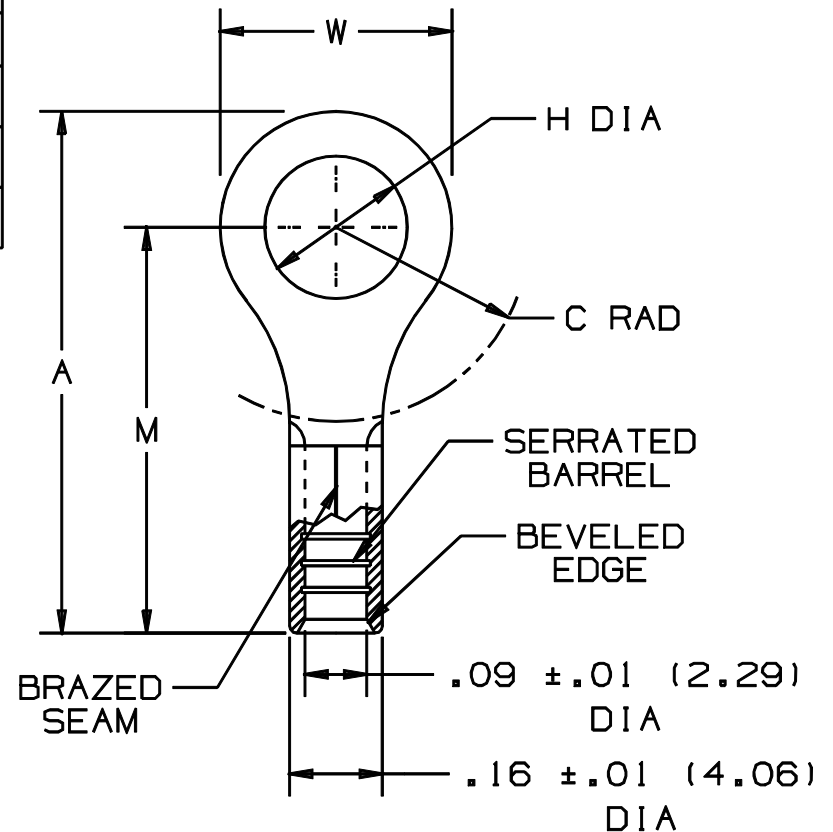

A41266_05

05	1/01	RM		FILESPEC WAS N41266AA_PCD_04				 PANDUIT CORP. TINLEY PARK, ILLINOIS			
04		JKD		ADDED CT-1570 TOOL	07632						
3	4-95	MS	RS	REVISED DIMENSIONS	03186	KS	LA	#16-14 BARREL NON-INSULATED RING TONGUE, HIGH TEMPERATURE, 650° F			
2	4-95	MS	RS	UPDATED NOTES AND DIMENSIONS	03166	KS	LA				
REV	DATE	BY	CHK	DESCRIPTION	ECN #	PM	APP	DRAWN BY	CHK'D	SCALE	DRAWING NO.
								DAW		NONE	A41266

Mouser Electronics

Authorized Distributor

Click to View Pricing, Inventory, Delivery & Lifecycle Information:

Panduit:

[P14-10RHT6-C](#) [P14-6RHT6-M](#) [P14-8RHT6-C](#) [P14-6RHT6-C](#) [P14-8RHT6-M](#) [P14-10RHT6-M](#)