



LOC	DIST	REVISIONS					
GP	00	P	LTR	DESCRIPTION	DATE	DWN	APVD
			J	REVISED PER ECR-13-001881	02APR2013	LJC	T.T

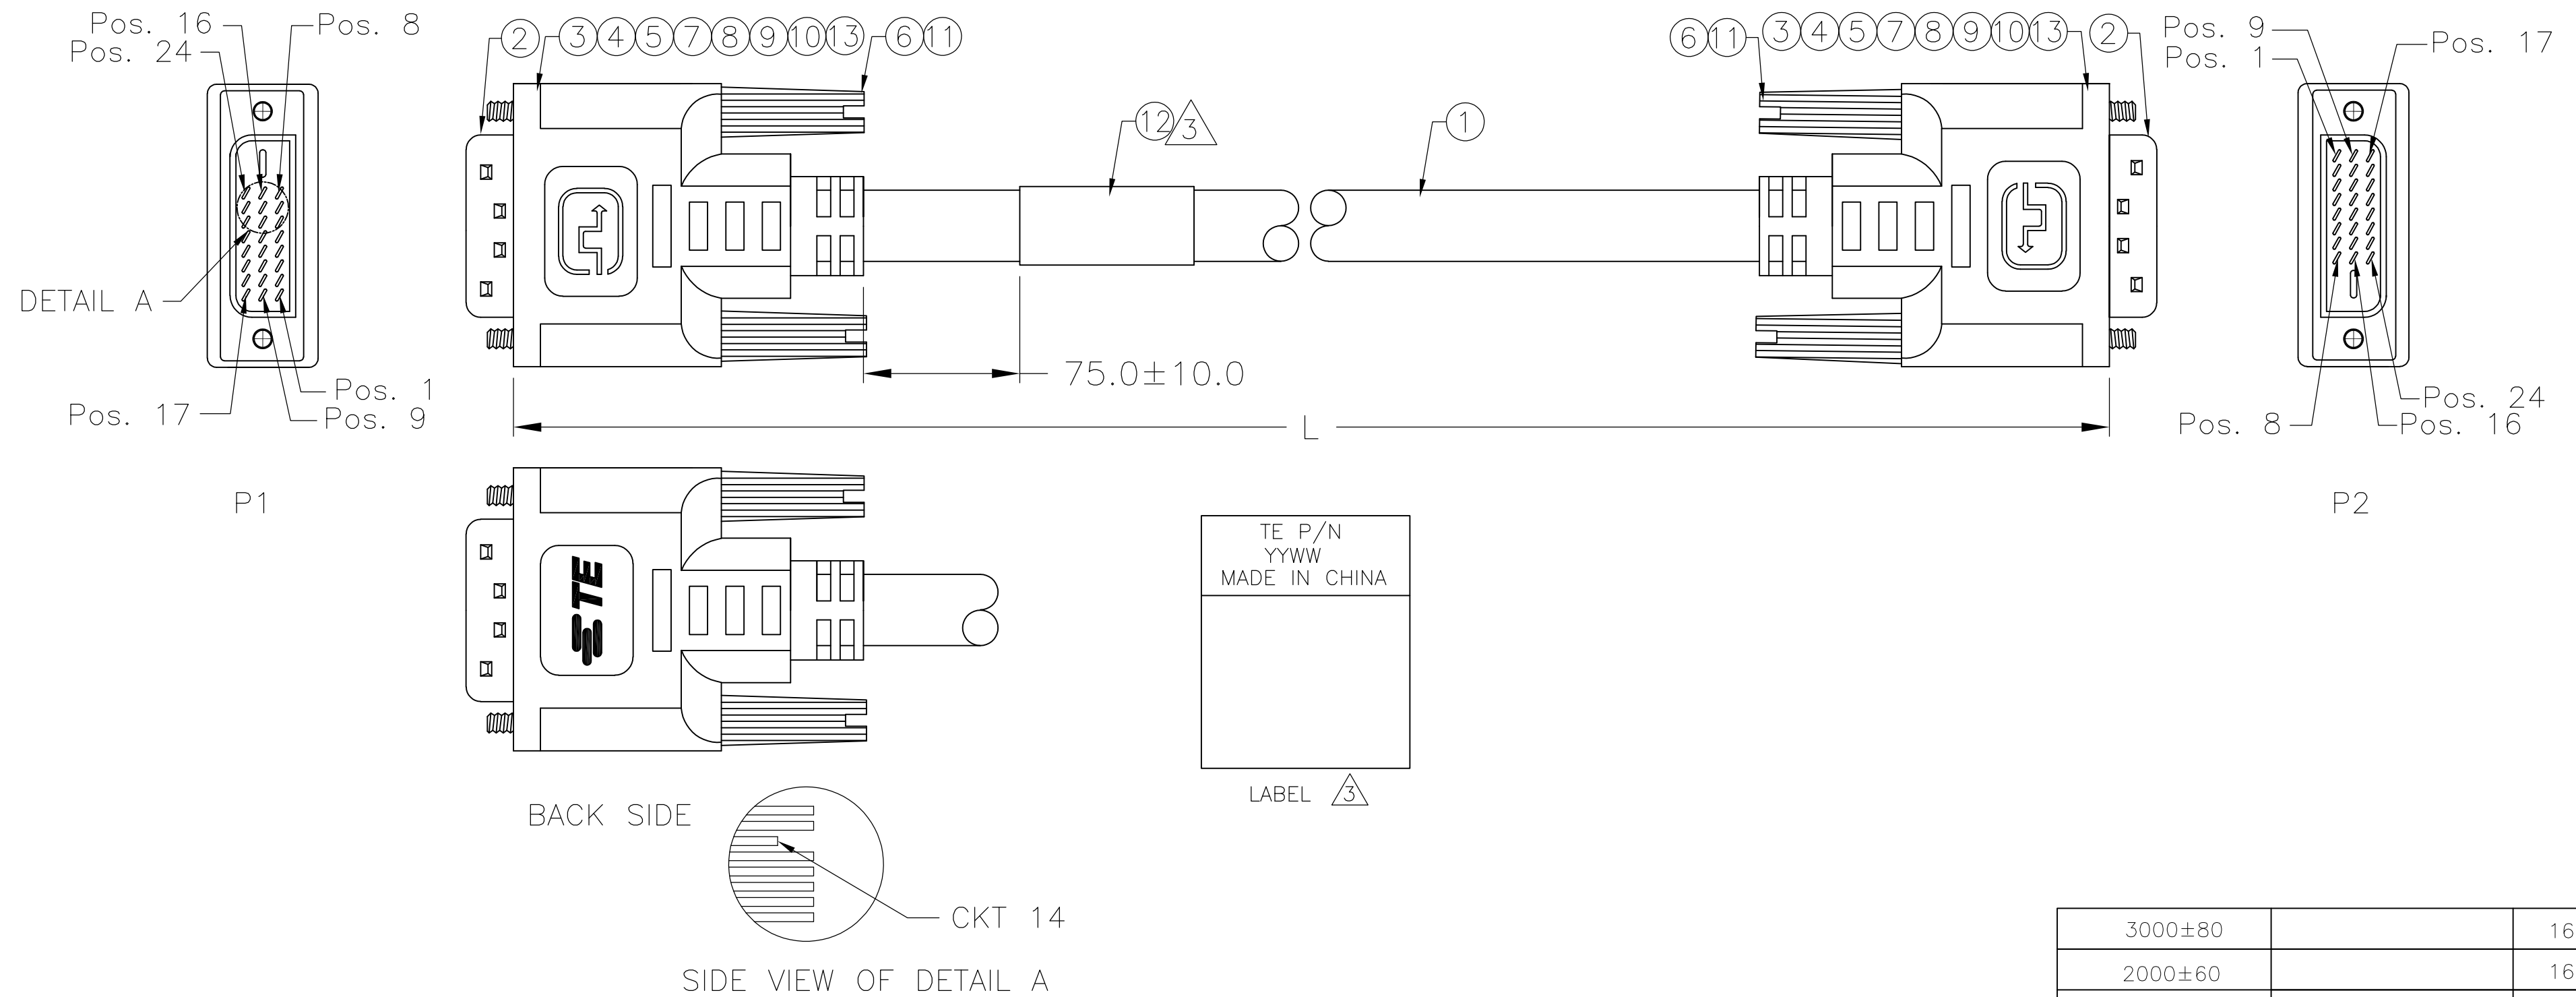

PIN ASSIGNMENT :

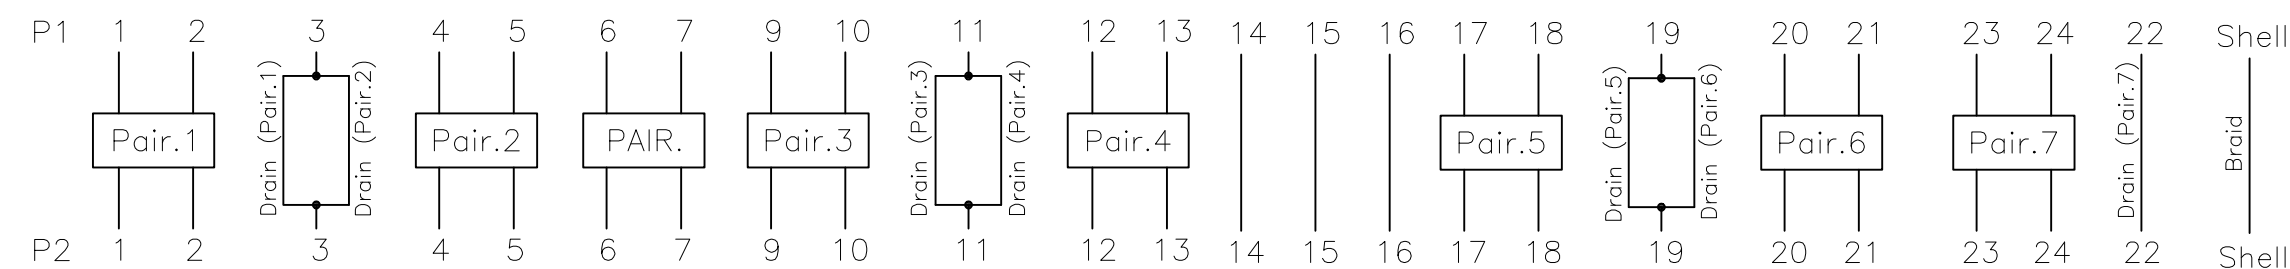

NOTES:

1. CABLE SHALL BE TESTED WITH AUTOMATED TEST EQUIPMENT FOR THE FOLLOWING:
 - A. CONNECTION RESISTANCE SHALL NOT EXCEED 1.8 OHMS.
 - B. INSULATION RESISTANCE 100M OHMS, MIN.
 - C. HIPOT—300 VOLTS AT 0.01 SEC.
2. CABLE ASSEMBLY MUST PASS DVI 1.0 SPECIFICATION.
- ③ CABLE LABEL TO BE APPLIED AS SHOWN.
4. 100% DISPLAY—SCREEN FUNCTIONAL TESTING

				3000±80		1653928-3	
				2000±60		1653928-2	
				1000±30		1653928-1	
				LENGTH(L)	CUSTOMER P/N	TE P/N	
3	AR	AR	AR	MR	UL TAPE, Black.		13
	1	1	1	PC	Label Size: 25.0*50.0, White: 25.0*13.0mm.		12
	4	4	4	PC	DVI #4-40 3*45mm Thumbscrew.		11
	AR	AR	AR	MR	Copper Foil, W: 8mm.		10
	AR	AR	AR	KG	PVC, Shore A 90±3, Color: White (WH01).		9
	AR	AR	AR	KG	Solder Wire		8
	AR	AR	AR	MR	Heat Shrink Tubing, OD:1.0mm, Color: Black.		7
	AR	AR	AR	KG	PVC, Shore A 95±3, Color: White (WH01).		6
	AR	AR	AR	MR	Heat Shrink Tubing, OD:1.5mm, Color: Black.		5
	AR	AR	AR	MR	Heat Shrink Tubing, OD:2.0mm, Color: Black.		4
	2	2	2	PC	Metal Can For DVI Connector.		3
	2	2	2	PC	DVI-D Dual Channel, 24Pin+1Pin, Gold Flash		2
	AR	AR	AR	MR	UL20276 (1P*28AWG+Drain+AL/Mylar)*7+(1P+3C)* 28AWG+Al/Mylar+Braid. Color: Black(BK01)		1
	-3	-2	-1	U/M	DESCRIPTION		ITEM

THIS DRAWING IS A CONTROLLED DOCUMENT.		DWN 22JAN04 CHK JERRY LIU 11JUN04 MONTGOMERY,JOHN D APVD 11JUN04 MONTGOMERY,JOHN D PRODUCT SPEC — APPLICATION SPEC — WEIGHT —		 TE Connectivity NAME DVI-D TO DVI-D DUAL LINK CABLE ASSEMBLY — SIZE CAGE CODE DRAWING NO A2 00779 C-1653928 RESTRICTED TO —	
DIMENSIONS: mm 		TOLERANCES UNLESS OTHERWISE SPECIFIED: 0 PLC ± — 1 PLC ± — 2 PLC ± — 3 PLC ± — 4 PLC ± — ANGLES ± — FINISH —		SCALE NTS SHEET 1 OF 1 REV	
MATERIAL —		CUSTOMER DRAWING			

Mouser Electronics

Authorized Distributor

Click to View Pricing, Inventory, Delivery & Lifecycle Information:

[TE Connectivity:](#)

[1653928-2](#)