

REV. 1

DCO 63333

COIL: @ 25°C	390 OHMS ±10%
RESISTANCE	390 OHMS ±10%
NOMINAL VOLTAGE	26.5 VDC
MUST OPERATE	13.0 VDC
MUST RELEASE	10.1 VDC MAX, 1.84 VDC MIN.


ENVIRONMENT:

VIBRATION 10 CPS TO 2000 CPS @ 15 g's
 SHOCK 100 g's 6 MS. DURATION

TEMPERATURE -65 °C TO +125 °C

NOTES: OPERATE & RELEASE 7 MS MAX.
 (INCLUDING BOUNCE)

CUSTOMER DATA SHEET

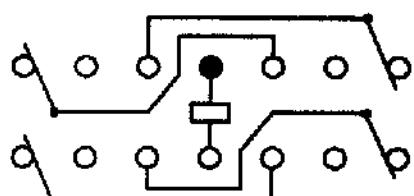

TERMINAL VIEW

CONTACT RATING: LOW LEVEL TO
 2 AMP 26 VDC RESISTIVE
 100,000 OPERATIONS

DR. R.B. 4/15/98 CK. 716 10-24-00

CC Technologies
 advanced control electronic solutions

CUST. QPL
 CUST. NO. M39016/40-002 REV. _____

"SR" RELAY

SR-7602

Mouser Electronics

Authorized Distributor

Click to View Pricing, Inventory, Delivery & Lifecycle Information:

[TE Connectivity:](#)

[M39016/40-002](#)