


D

D

I:\U. a99- 0248\customer\c-1318688\1318688.drw

B

A

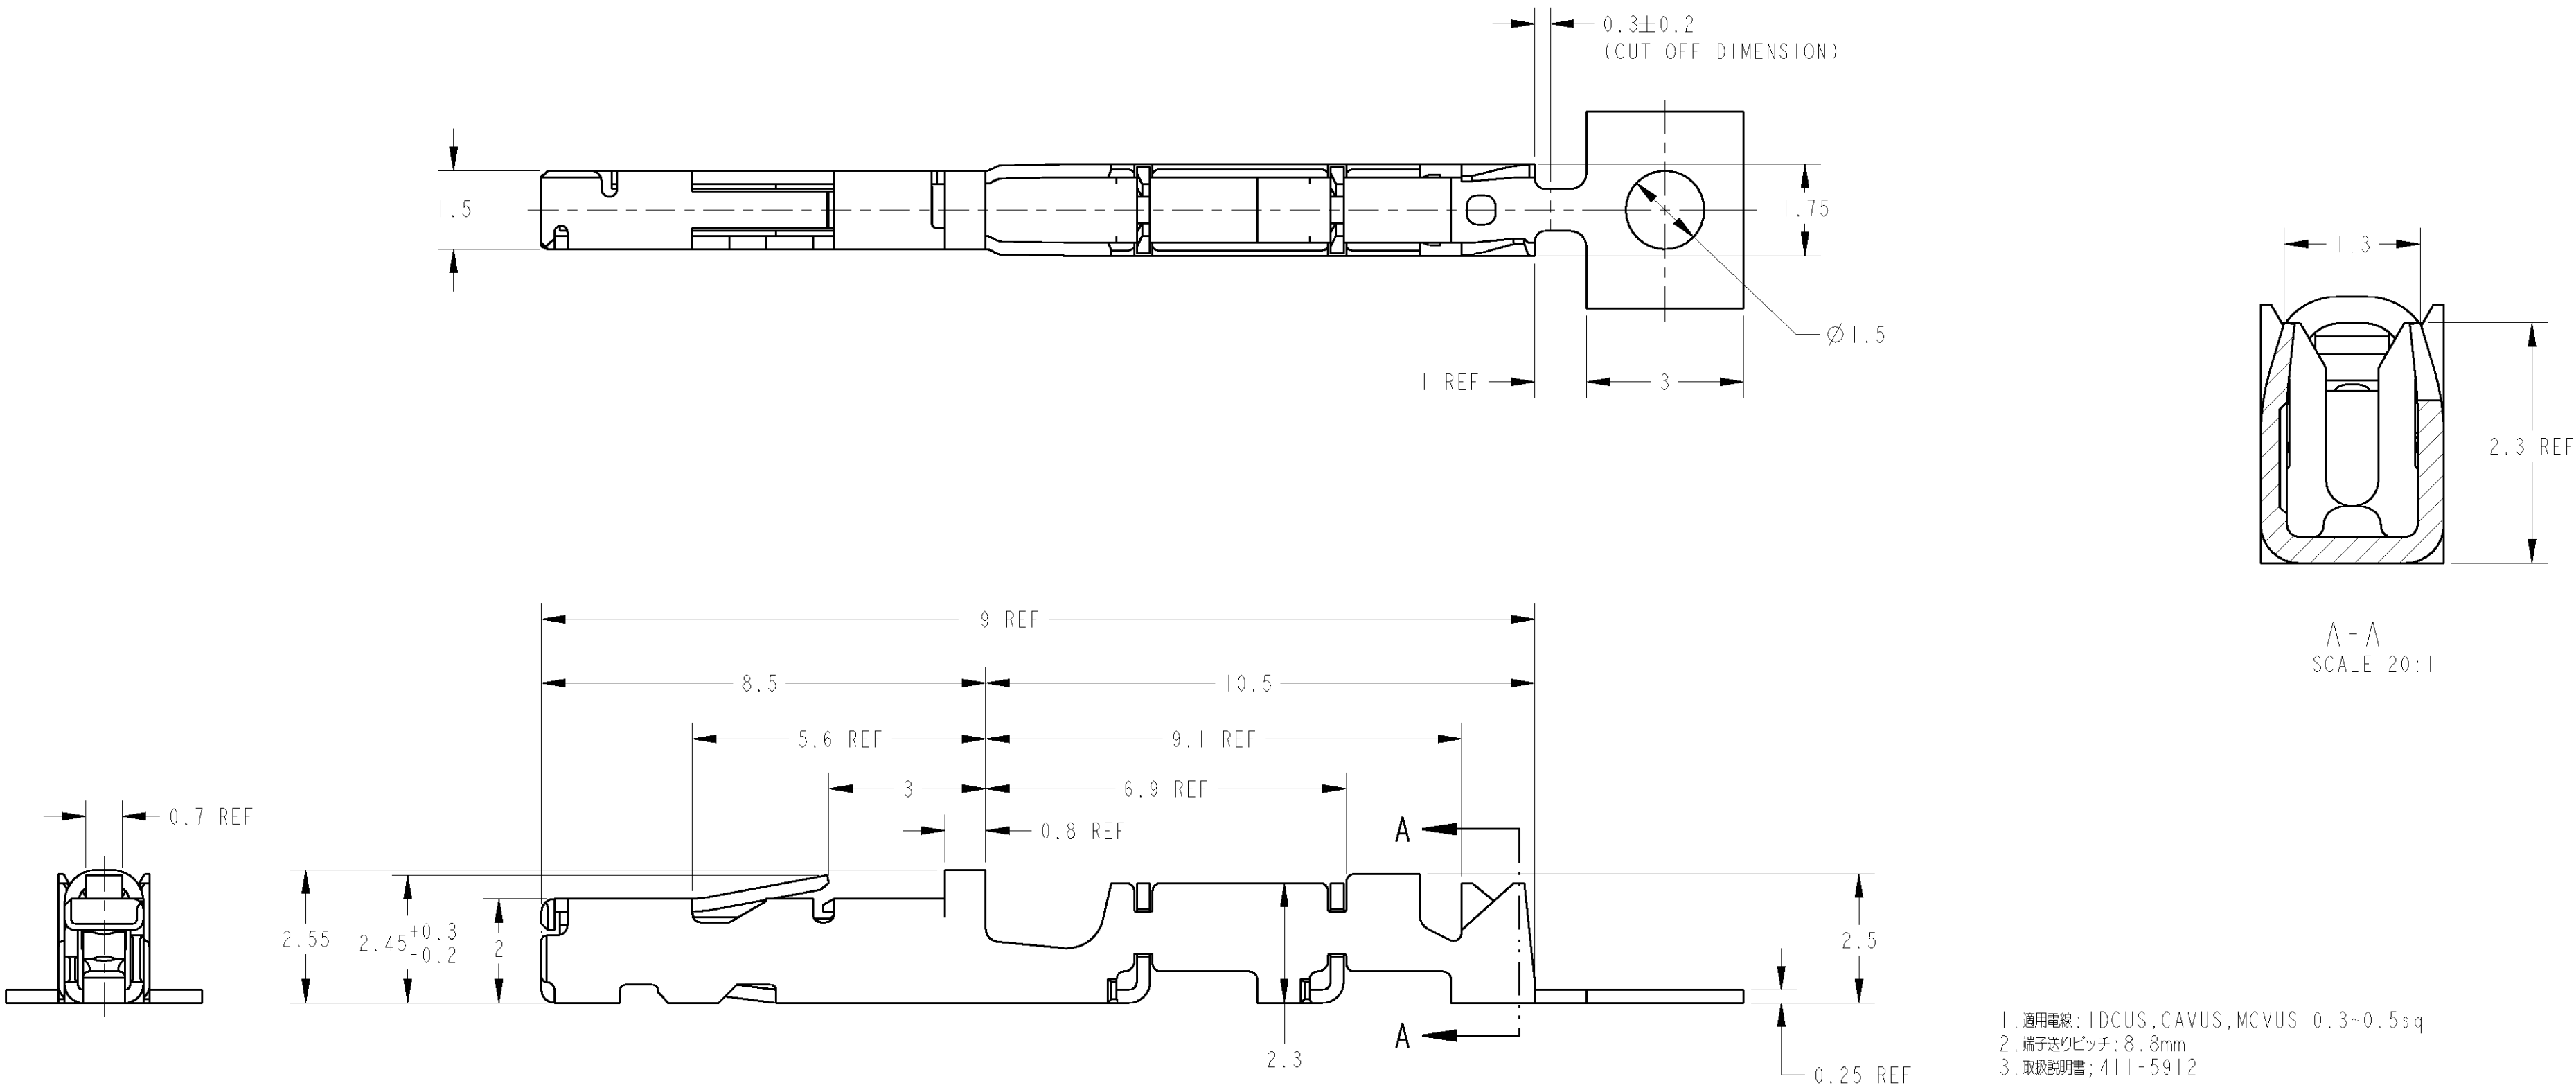

1. 適用電線: IDCUS, CAVUS, MCVUS 0.3~0.5sq
2. 端子送りピッチ: 8.8mm
3. 取扱説明書: 411-5912

1. APPLICABLE WIRE RANGE: IDCUS, CAVUS, MCVUS 0.3~0.5sq
2. CONTACT FEED PITCH: 8.8mm
3. INSTRUCTION SHEET No: 411-5912

TIN	1318688-1
FINISH	PART NO

WIRE RANGE 適合電線断面積	0.37~0.56mm ²	INSULATION DIA 被覆外径	Ø1.1~1.4mm
-----------------------	--------------------------	------------------------	------------

AMP	Tyco Electronics AMP K.K. Kawasaki, Japan
------------	--

025 IDC RECEPTACLE CONTACT		
----------------------------	--	--

SIZE A2	CAGE CODE 00779	DRAWING NO C-1318688
------------	--------------------	-------------------------

SCALE 10.1	SHEET 1	OF 1	REV 0
---------------	------------	---------	----------

THIS DRAWING IS A CONTROLLED DOCUMENT FOR AMP INCORPORATED. IT IS SUBJECT TO CHANGE AND THE CONTROLLING ENGINEERING ORGANIZATION SHOULD BE CONTACTED FOR THE LATEST REVISION.		DWN S. AMEMIYA 30MAR01
DIMENSIONS: 単位: 概 mm		CHK N. SAI 30MAR01
TOLERANCES UNLESS OTHERWISE SPECIFIED: 一般公差: ±0.2		APVD N. SAI 30MAR01
0-PLC ±		PRODUCT SPEC 108-5660
1-PLC ±0.1		APPLICATION SPEC 114-5276
2-PLC ±0.15		WEIGHT 0.23 g
3-PLC ±0.001		CUSTOMER DRAWING
4-PLC ±0.0001		
ANGLES ±3°00'		
FINISH 仕上		
MATERIAL 材料 CU Alloy		

Mouser Electronics

Authorized Distributor

Click to View Pricing, Inventory, Delivery & Lifecycle Information:

[TE Connectivity:](#)

[1318688-1](#)