






RECOMMENDED PCB LAYOUT



CIRCUIT: SPST

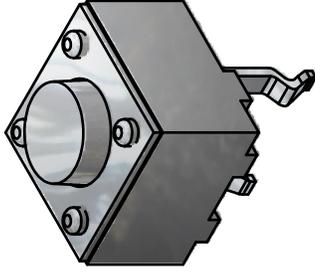

ISOMETRIC

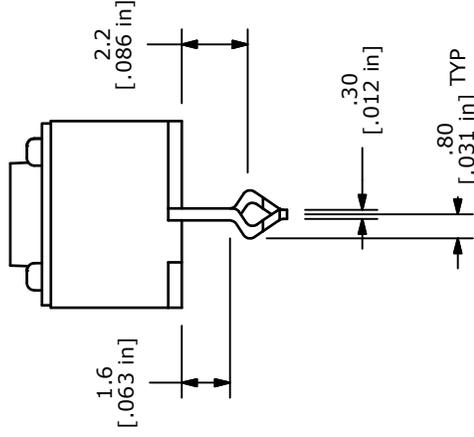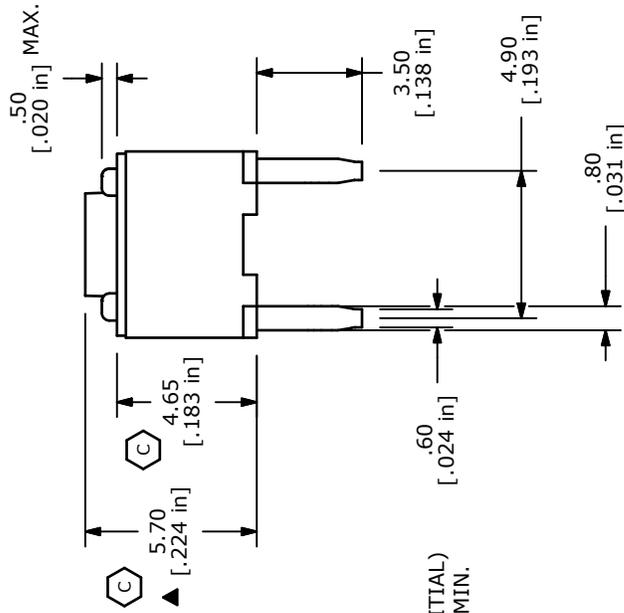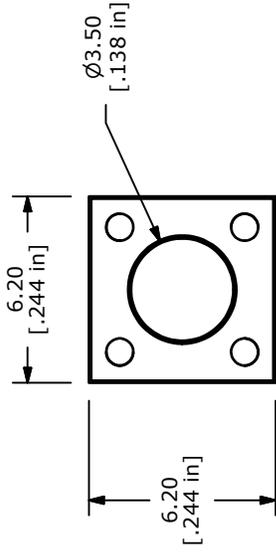

- NOTES:
- ALL DIMENSIONS IN MM
 - GENERAL TOLERANCE: X.X=±0.4
X.XX=±0.25
 - TERM. NOS. FOR REFERENCE ONLY.
 - RATING: 30VDC, 50mA
 - OPERATING FORCE: 70 ± 20 gms
 - TRAVEL: 0.35mm +/-0.2mm
 - CONTACT RESISTANCE: 100 MILLI OHMS MAX. (INITIAL)
 - MECHANICAL/ELECTRICAL LIFE 1,000,000 CYCLES MIN.
 - OPERATING TEMPERATURE: -25C to +85C.
 - INSULATION RESISTANCE: 100M OHMS.
 - DIELECTRIC STRENGTH: 600VAC, 1MINUTE.
 - 2002/95/EC (ROHS) COMPLIANT
 - PACKAGING: BULK
 - ▲ DENOTES CRITICAL PARAMETER

		E-SWITCH®			
C	19538	CHANGE DIMS was 5.75 & 4.9	12/20/10	BGL	
B	16736	ADDED .5 DIM AND FIXED 1.6 DIM	12/7/06	TN	
A	16674	RELEASED FOR PRODUCTION	11/17/06	TN	
REV	PCR NO	DESCRIPTION	DATE	BY	
THE INFORMATION CONTAINED IN THIS DOCUMENT IS PROPRIETARY TO E-SWITCH AND IS NOT TO BE COPIED OR TRANSFERRED					
TITLE TL1150AF070Q					
SCALE 4:1		DATE 12/7/2006	DR TN	DWG Q970065	REV C

Mouser Electronics

Authorized Distributor

Click to View Pricing, Inventory, Delivery & Lifecycle Information:

[E-Switch:](#)

[TL1150AF070Q](#)