




LOC	DIST	REVISIONS				
BD	95	P	LTR	DESCRIPTION	DATE	OWN
			B	REVISED PER ECO-14-018700	17DEC2014	AP

D


C

B

A

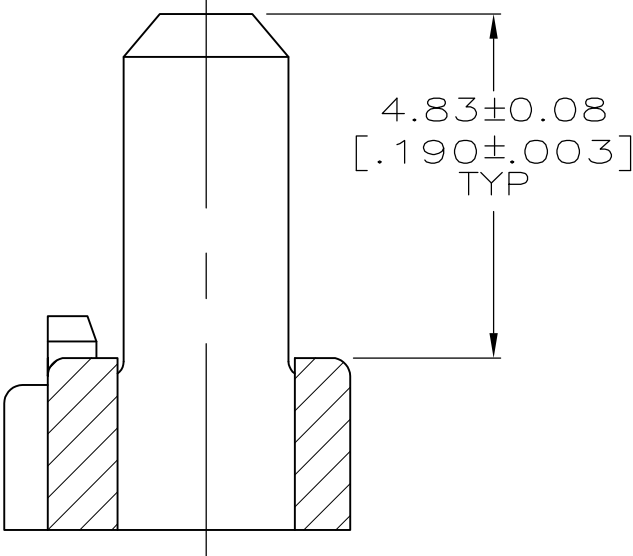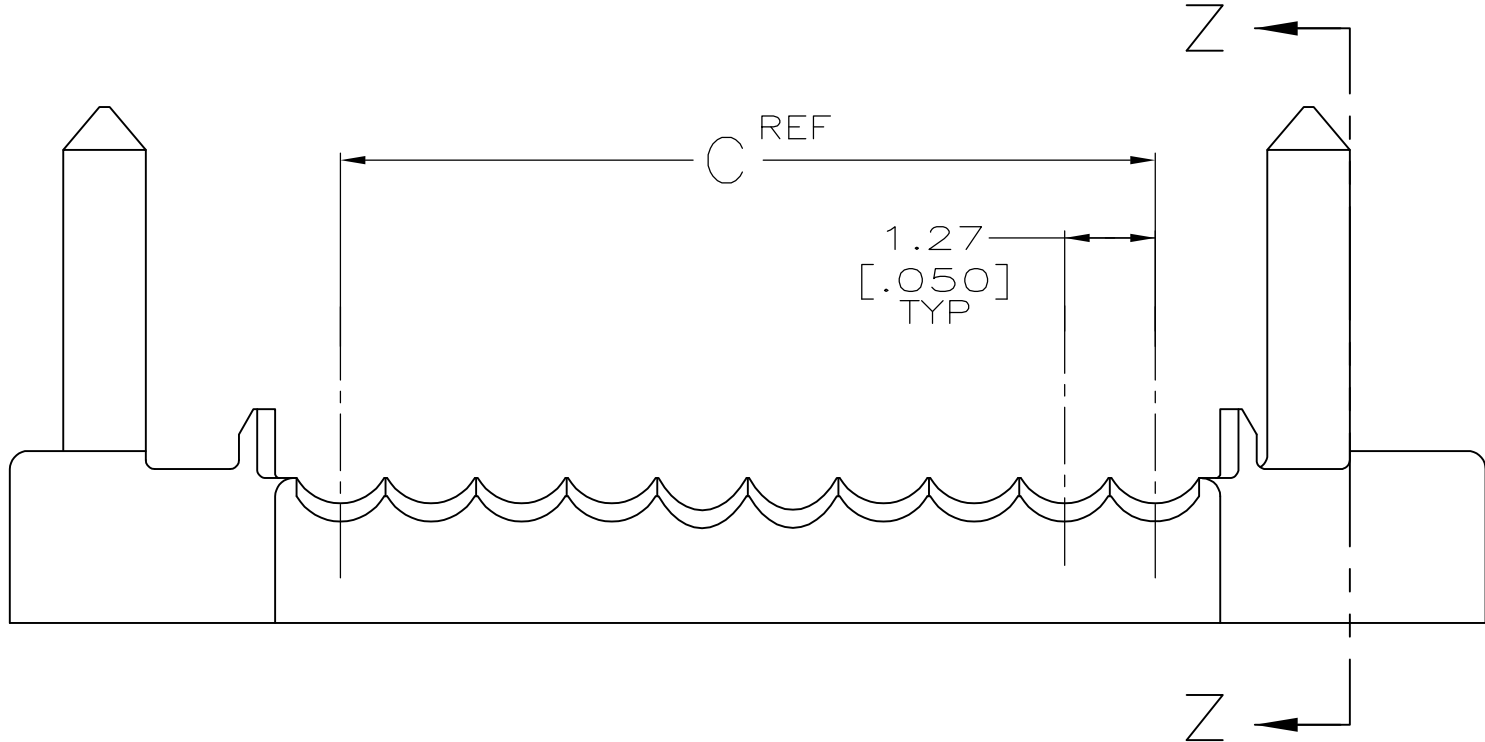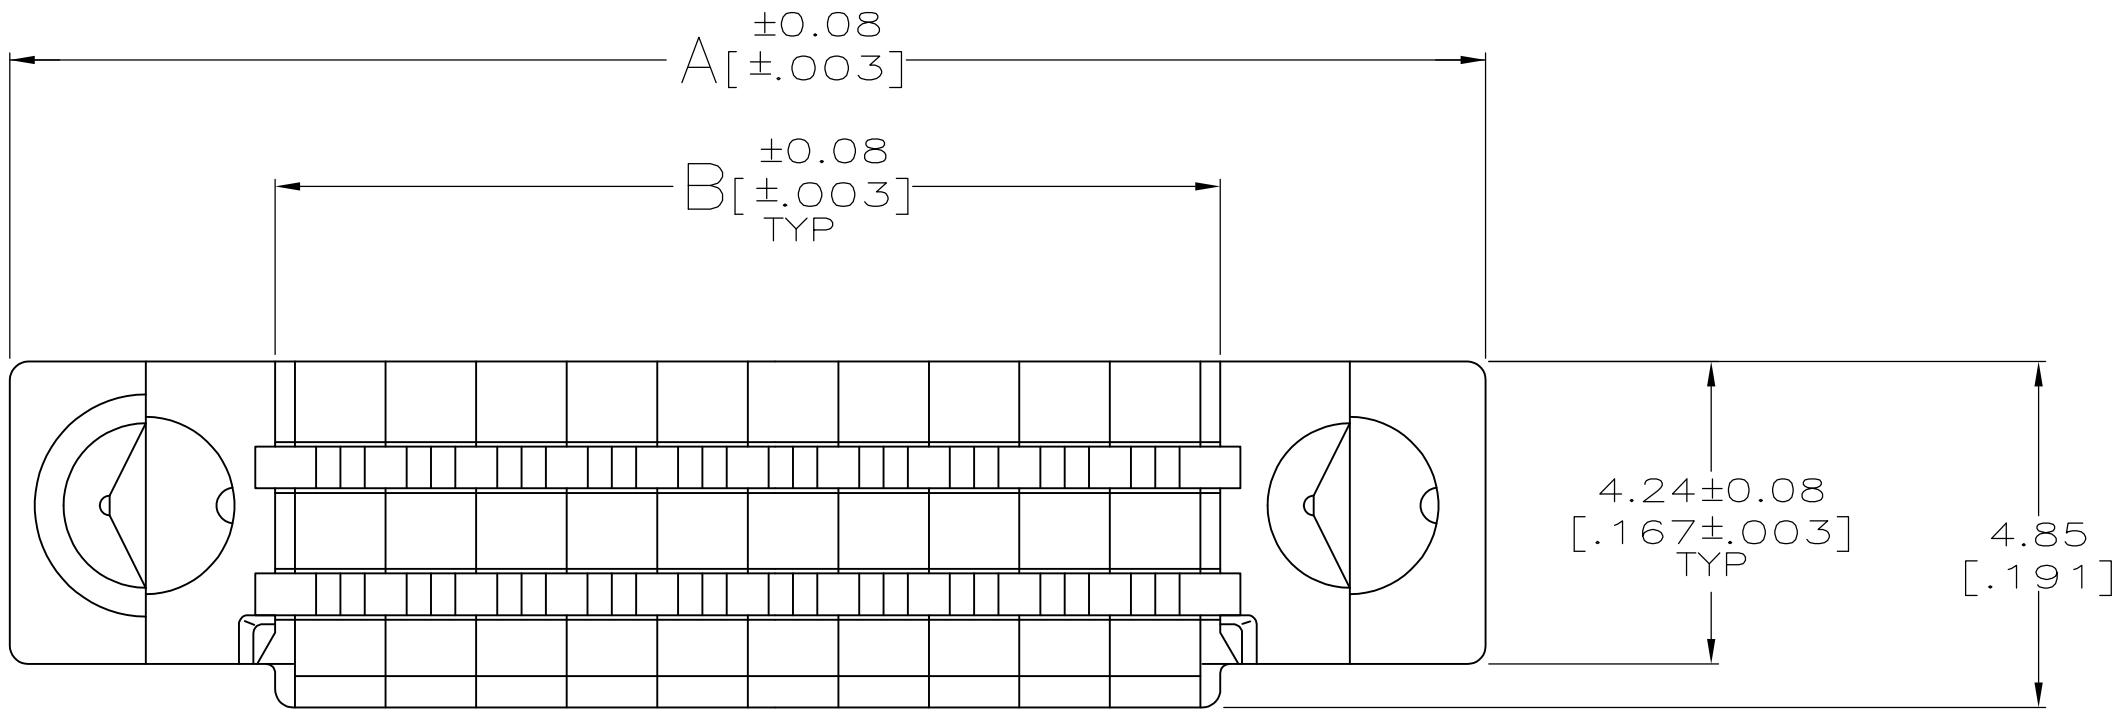

SECTION Z-Z

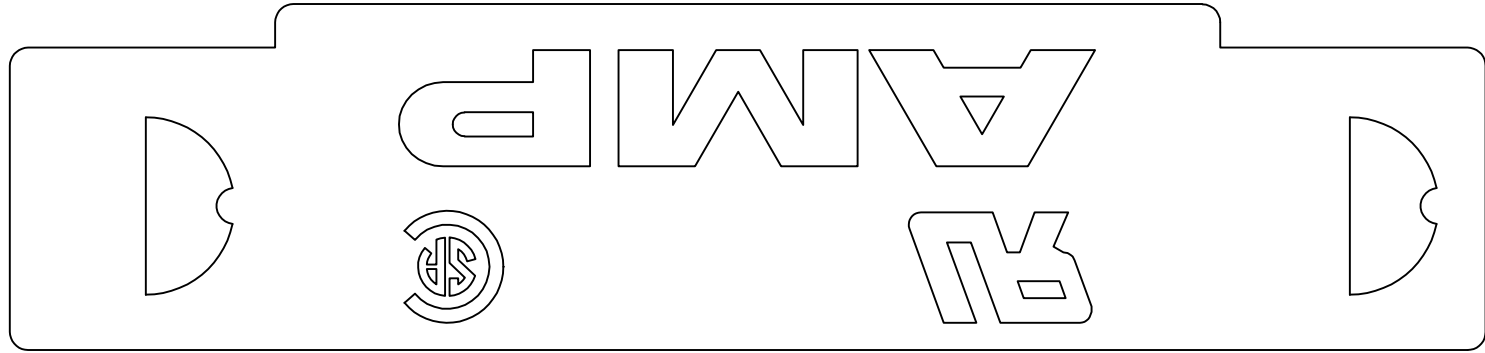

- 1 POLYESTER, UL 94V-0 RATED, BLACK.
- 2 RECOMMENED WIRE: 28 OR 30 AWG SOLID OR 7 STRAIN, 0.74- 0.91 [.029- .036] INSULATION DIAMETER. WIRE MUST BE APPROVED BY TE INC.
- 3 TWO COVERS REQUIRED PER CONNECTOR ASSEMBLY.

OBSOLETE

21.59 [.850]	23.42 [.922]	30.86 [1.215]	36	1-749108-1
15.24 [.600]	17.07 [.672]	24.51 [.965]	26	1-749108-0
74.93 [2.950]	76.76 [3.022]	84.20 [3.315]	120	749108-9
62.23 [2.450]	64.06 [2.522]	71.50 [2.815]	100	749108-8
49.53 [1.950]	51.36 [2.022]	58.80 [2.315]	80	749108-7
41.91 [1.650]	43.74 [1.722]	51.18 [2.015]	68	749108-6
36.83 [1.450]	38.66 [1.522]	46.10 [1.815]	60	749108-5
30.48 [1.200]	32.31 [1.272]	39.75 [1.565]	50	749108-4
24.13 [.950]	25.96 [1.022]	33.40 [1.315]	40	749108-3
16.51 [.650]	18.34 [.722]	25.78 [1.015]	28	749108-2
11.43 [.450]	13.26 [.522]	20.70 [.815]	20	749108-1
C	B	A	NO OF POSN	PART NUMBER

THIS DRAWING IS A CONTROLLED DOCUMENT.

DWN
C.OBERMAN
10/19/93

CHK
R.STONE
10-19-93

APVD
R.MIKLINSKI
12-6-93

TE Connectivity

TERMINATING COVER,
AMPLIMITE™ .050 SERIES

DIMENSIONS:
mm[INCHES]

TOLERANCES UNLESS
OTHERWISE SPECIFIED:

0 PLC ± -

1 PLC ± -

2 PLC ± 0.13 [.005]

3 PLC ± -

4 PLC ± -

ANGLES ± -

FINISH -

MATERIAL

1

PRODUCT SPEC
108-1228

APPLICATION SPEC
114-40029

WEIGHT
-

CUSTOMER DRAWING

SIZE
A2

CAGE CODE
00779

DRAWING NO
G-749108

RESTRICTED TO
-

SCALE
10:1

SHEET
1 of 1

REV
B

Mouser Electronics

Authorized Distributor

Click to View Pricing, Inventory, Delivery & Lifecycle Information:

[TE Connectivity:](#)

[749108-7](#)