


LxKx-ST11xx Low Profile Optical Transmitter

Gigabit Ethernet / 1x Fiber Channel Applications 3.3V, 850nm, VCSEL, Multimode, Up to 550 Meters

Applications

The LxKx-ST11xx multimode optical fiber transceivers provide low profile, cost effective solutions for Gigabit Ethernet and 1x Fiber Channel multimode optical fiber data links with a duplex LC connector interface.

These transceivers are fully compliant with the IEEE Gigabit Ethernet and 1x Fiber Channel standards but can be used for any other data communications purpose within their operating parameters.

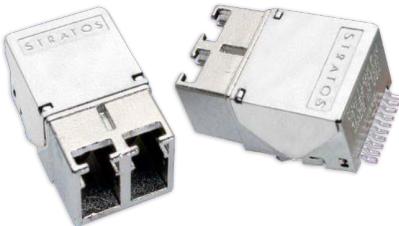

Features

- Low Profile Design - 0.386 inches max. height
- Surface mount I/O pins for high speed signal integrity
- All metal body, solder or screw mount options
- Industrial Temp Range, Vibration tolerant design
- RX data squelch on Signal Detect deassert
- Individual (separate) +3.3 V power supply per port
- Industry standard duplex multimode LC receptacle
- Full compliance to IEEE and ANSI requirements
- EN-60825 / IEC-825 / CDRH Class 1 Compliant
- Optional Parylene C Conformal Coating
- High Power options available
- Optional addition of fiber pigtail

Ordering Information

| | | | | | | | | |
|------------------------------|----|---|---|---|-------------------------------------|------|---|---|
| Low Rider | L | X | K | X | - | ST11 | X | X |
| Roughrider ¹ | RR | | K | X | - | ST11 | X | X |
| Shell Options | | | | | Mounting | | | |
| N – No GND Tabs (Flat Shell) | | | | | BLANK – Solder Posts (0.125 length) | | | |
| T – GND Tabs | | | | | B – Screw Posts (0.050 length) | | | |
| Extended Margin Link | | | | | Temperature and Coating | | | |
| BLANK – Standard Power | | | | | H – -40 to 85°C, no coating | | | |
| 2 – +2dB Margin | | | | | M – -40 to 85°C, conformal coating | | | |
| 3 – +3dB Margin | | | | | | | | |
| 5 – +5dB Margin | | | | | | | | |

Transmitters: VCCTX = 3.135V to 3.465V, T_A = Operating Temperature Range

| Parameter | Symbol | MIN | Typical | MAX | Unit |
|---|----------------|------|---------|------|------|
| Optical Output Power ¹ LxK-ST11xx | P _O | -9.5 | | -4 | dBm |
| LxK2-ST11xx (+2dB Margin) | | -8.0 | | -1.5 | |
| LxK3-ST11xx (+3dB Margin) | | -7.0 | | -1.5 | |
| LxK5-ST11xx (+5dB Margin) | | -5.0 | | -1.5 | |
| Extinction Ratio | ER | | 10 | | dB |
| Coupled Power Ratio | CPR | 9 | | | dB |
| Total Jitter ¹ | | | 80 | 153 | pS |

Receivers: VCCRX = 3.135V to 3.465V, T_A = Operating Temperature Range

| Parameter | Symbol | MIN | Typical | MAX | Unit |
|---|----------------|-----|---------|-----|------|
| Optical Sensitivity ¹ Date Code 0105 and later (Jan 2005) | P _I | -21 | | 0 | dBm |
| Date Code 5204 and before (Dec 2004) | | -17 | | 0 | |
| Optical Return Loss | ORL | 12 | | | dB |

1. BER=10⁻¹² @ 1.25Gbps, PRBS 2⁷-1, NRZ, Compliant with ANSI X3.297 / FC-PH-2

Link Distances

| Application | Fiber Specification | Distance |
|--------------------------------|--|------------------------------|
| Gigabit Ethernet – IEEE 802.3z | 62.5/125 – 160MHz*Km 62.5/125 – 200MHz*Km 50/125 – 400MHz*Km 50/125 – 500MHz*Km | 220M 275M 500M 550M |
| Fiber Channel – ANSI X3.297 | 62.5/125 – 160MHz*Km 50/125 – 500MHz*Km | 300M 500M |

For more information on this product consult the LxKx-ST11xx product data sheet.

Mouser Electronics

Authorized Distributor

Click to View Pricing, Inventory, Delivery & Lifecycle Information:

[Cinch Connectivity Solutions](#):

[LNK-ST11H](#) [LTK-ST11HB](#) [LNK-ST11MB](#) [LNK-ST11HB](#) [LTK-ST11MB](#) [LNK-ST11HB-R6](#) [LTK-ST11HB-R6](#)