


## THIS COPY IS PROVIDED ON A RESTRICTED BASIS AND IS NOT TO BE USED IN ANY WAY DETRIMENTAL TO THE INTERESTS OF PANDUIT CORP.

Material	High Conductivity Seamless Copper Tube		
Plating	Electro-Tin		
Wire Size	2 AWG		
Wire Type	Stranded Copper; Class B: Compact, Compressed or Concentric, Class C: Concentric		
Wire Strip Length	1-1/4 in.		
Stud Size	#10		
UL Listed Wire Connector	Yes, for applications up to 35kv. Consult cable manufacturer for voltage stress relief instructions with applications greater than 2000 volts.		
UL Temperature Rating	90°C		
C.S.A Certified Wire Connector	Yes		
Panduit Color Code on Barrel	BROWN		
Panduit Die Index No. on Barrel	P33		
Alternate Industry Die Index No. () on Barrel	(10)		

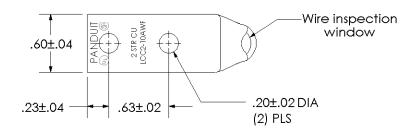

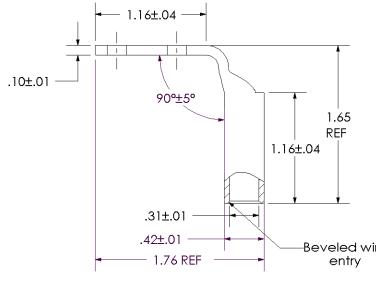



PANDUIT

(F)®	(U <sub>B</sub> )
CERTIFIED	LISTED Wire Connector

						CORP. TINLEY PARK, ILLINOIS	
						LCC2-10AWF-Q	
00	9/02	SAB	DRL	RELEASED	10342	Copper Lug - Two-Hole, Long Barrel with Window, 90° Angle Tongue	
REV	DATE	BY	СНК	DESCRIPTION	ECN	SCALE N/A DRAWING NO / CAD FILE LCC2-10AWF-CUST	

## **Mouser Electronics**

**Authorized Distributor** 

Click to View Pricing, Inventory, Delivery & Lifecycle Information:

Panduit:

LCC2-10AWF-Q