


REVISIONS

P	LTR	DESCRIPTION	DATE	DWN	APVD
	C1	REDRAWN PER ECO-17-007400	11DEC2017	RS	DR

AMP WIRE RANGE	 Listed FILE E13288	 LR7189 Certified
12-10 AWG SOLID OR STRANDED	12-10 AWG SOLID OR STRANDED	12-10 AWG SOLID OR STRANDED

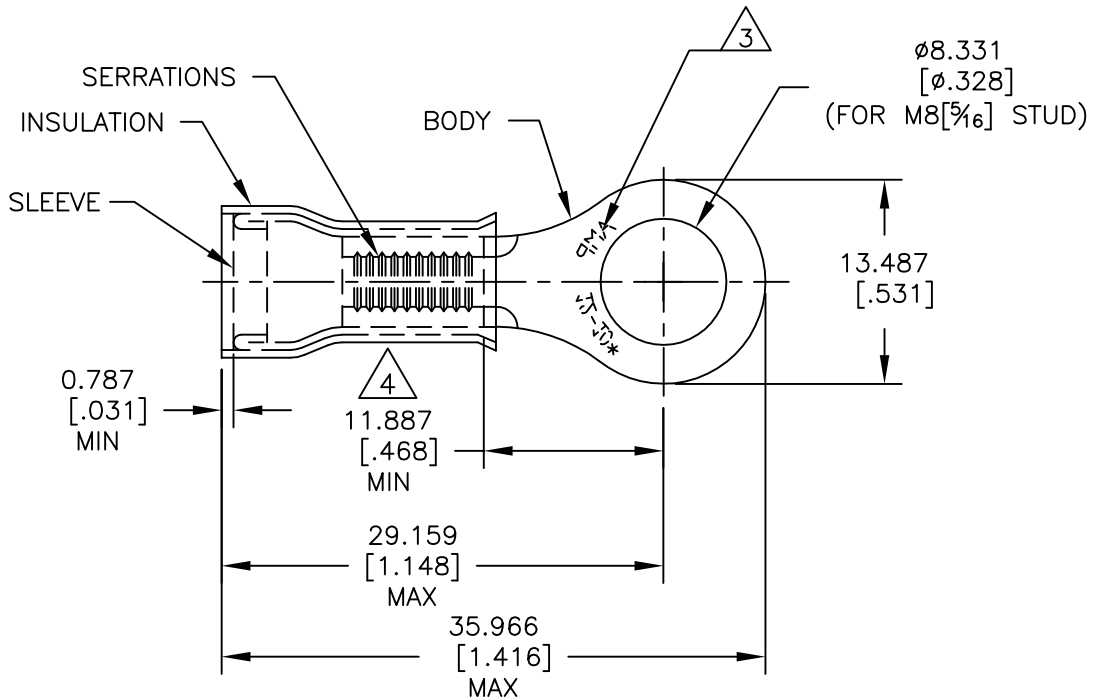

1 FOR $\phi 4.318[\phi .170]$ TO $\phi 7.620[\phi .300]$ WIRE INSULATION.

2 BODY MATERIAL THICKNESS: $1.016 \pm 0.051[.040 \pm .002]$

 STAMP AMP 12-10* APPROX AS SHOWN.

 APPLIES FROM EDGE OF METAL WIRE BARREL TO CENTER OF STUD HOLE.

 MATERIAL:
BODY & SLEEVE: COPPER PER ASTM B152
INSULATION: PVC

 FINISH:
BODY & SLEEVE: TIN PLATE PER ASTM B545
INSULATION: COLOR-YELLOW.

1500	ON TAPE	2-35346-1
500	LOOSE PIECE	35346
QTY.	PACKAGE TYPE	PART NUMBER

DIMENSIONS: mm [INCHES]		DWN RAVI S	11DEC2017	MATERIAL 5		FINISH 6					
TOLERANCES UNLESS OTHERWISE SPECIFIED: 0 PLC ± - 1 PLC ± - 2 PLC ± - 3 PLC ± 0.127[.005] 4 PLC ± - ANGLES ± -		CHK ROHDE DANIEL F	11DEC2017	TE TE Connectivity							
		APVD ROHDE DANIEL F	11DEC2017								
		PRODUCT SPEC UL 486 A-B		NAME WIRE TERMINAL, P.I.D.G-RING TONGUE, WIRE SIZE: 12-10							
		APPLICATION SPEC 114-2157									
		WEIGHT —		SIZE A4		CAGE CODE 00779		DRAWING NO C-35346		RESTRICTED TO —	
		CUSTOMER DRAWING						SCALE 2:1		SHEET 1 of 1	

Mouser Electronics

Authorized Distributor

Click to View Pricing, Inventory, Delivery & Lifecycle Information:

[TE Connectivity:](#)

[8-35346-2](#)