

HEIDI-W

~32° wide beam

TECHNICAL SPECIFICATIONS:

Dimensions	Ø 21.6 mm
Height	11.7 mm
Fastening	pin, tape
ROHS compliant	yes ⓘ


MATERIAL SPECIFICATIONS:

Component	Type	Material	Colour	Finish
HEIDI-W	Single lens	PMMA		
HEIDI-TAPE	Tape	PU tape		



ORDERING INFORMATION:

Component		Qty in box	MOQ	MPQ	Box weight (kg)
CA11268_HEIDI-W	Single lens	3264	204	204	10.8
» Box size: 480 x 280 x 300 mm					

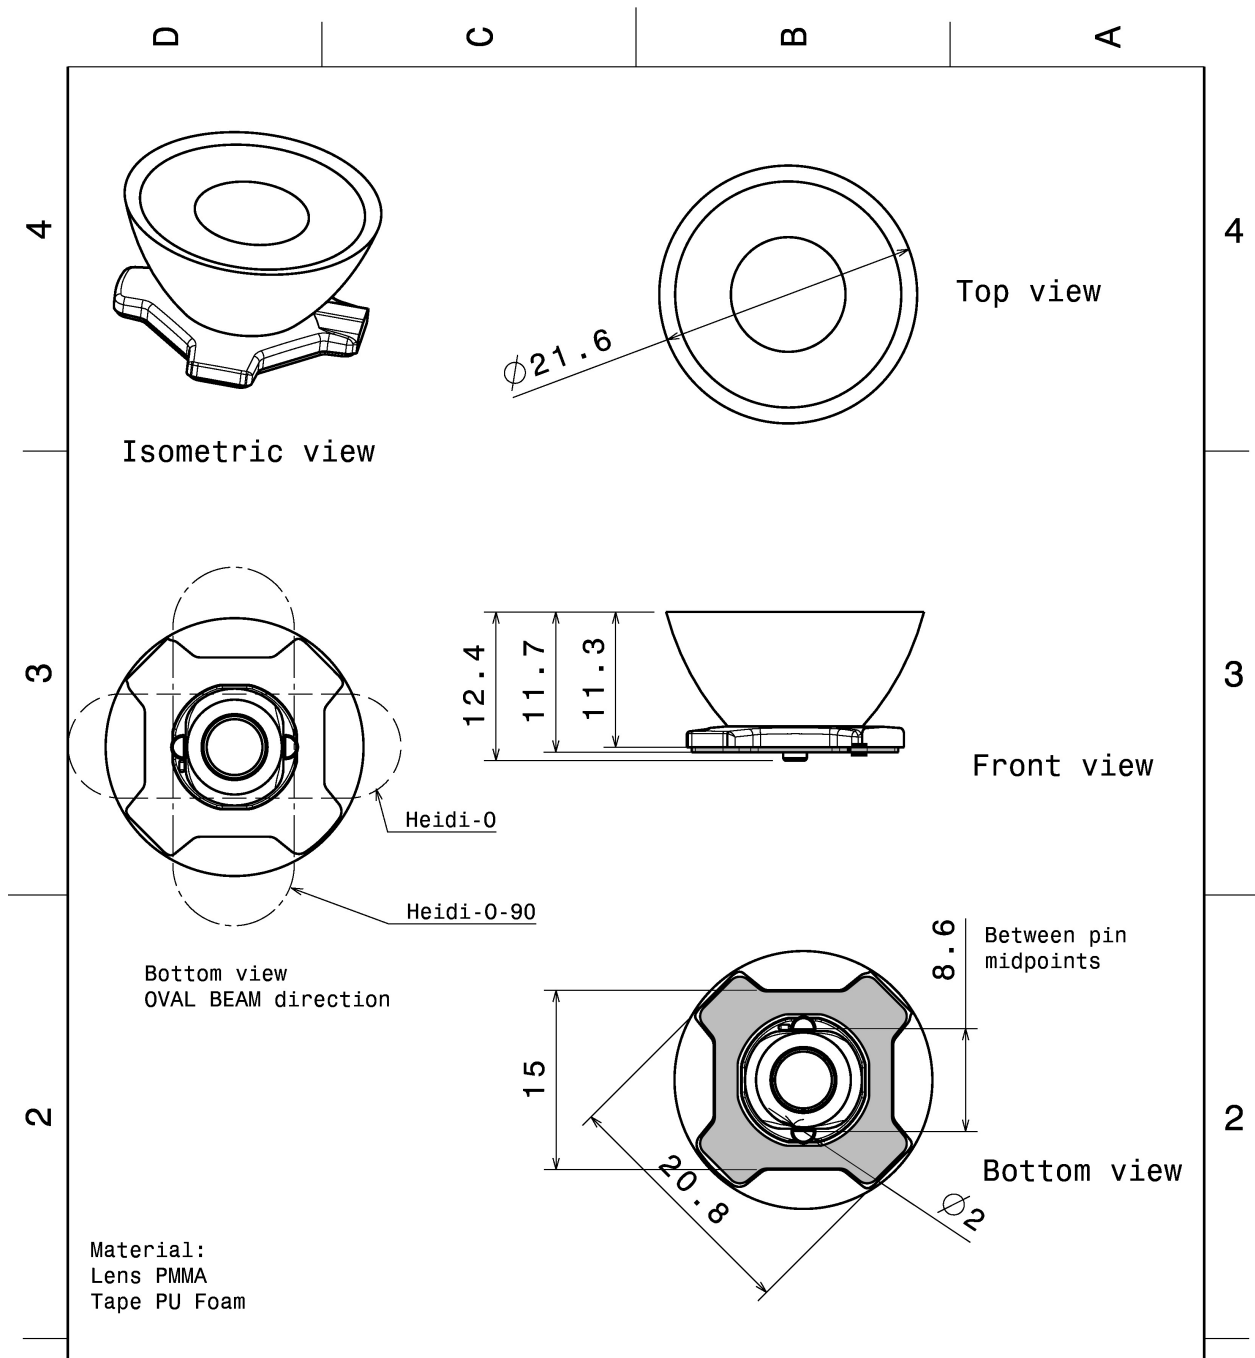

This drawing is our property. It can't be reproduced or communicated without our written agreement.		LEDiL		Ledil Oy Salorankatu 10 FIN-24100 SALO Finland	
DRAWING TITLE		Datasheet Heidi-Series Assy			
DRAWN BY	DATE	SIZE	DRAWING NUMBER		REV
ah	1.2.2012	A4			2
CHECKED BY	DATE	SCALE	2:1	WEIGHT (g)	SHEET
DESIGNED BY	DATE				1/1

PHOTOMETRIC DATA (MEASURED):

CREE 

LED XB-D
FWHM 30.0°
Efficiency 88 %
Peak intensity 2.560 cd/lm
LEDs/each optic 1
Light colour White
Required components:


CREE 

LED XB-H
FWHM 33.0°
Efficiency 88 %
Peak intensity 2.300 cd/lm
LEDs/each optic 1
Light colour White
Required components:





CREE 

LED XP-E
FWHM 32.0°
Efficiency 92 %
Peak intensity 2.680 cd/lm
LEDs/each optic 1
Light colour White
Required components:

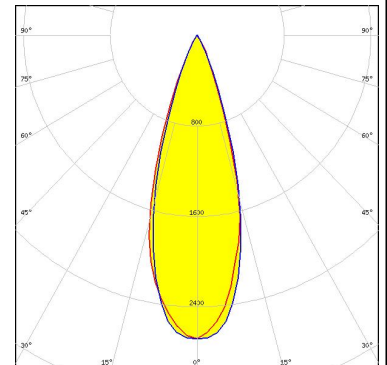

CREE 


LED XP-E2
FWHM 33.0°
Efficiency 89 %
Peak intensity 2.950 cd/lm
LEDs/each optic 1
Light colour White
Required components:

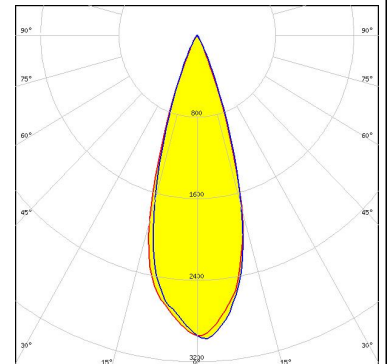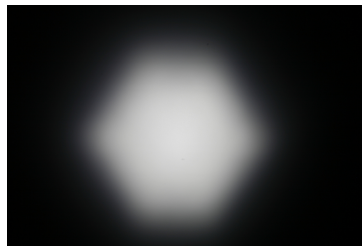

PHOTOMETRIC DATA (MEASURED):


CREE

LED XP-G
 FWHM 31.0°
 Efficiency 92 %
 Peak intensity 2.460 cd/lm
 LEDs/each optic 1
 Light colour White
 Required components:

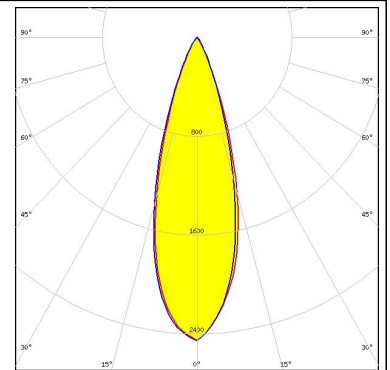


CREE

LED XQ-E HD
 FWHM 29.0°
 Efficiency 94 %
 Peak intensity 3.800 cd/lm
 LEDs/each optic 1
 Light colour White
 Required components:

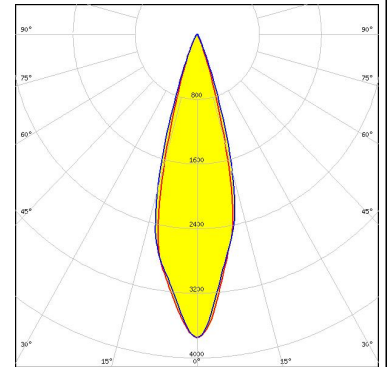



CREE

LED XQ-E HI
 FWHM 34.0°
 Efficiency 93 %
 Peak intensity 2.800 cd/lm
 LEDs/each optic 1
 Light colour White
 Required components:

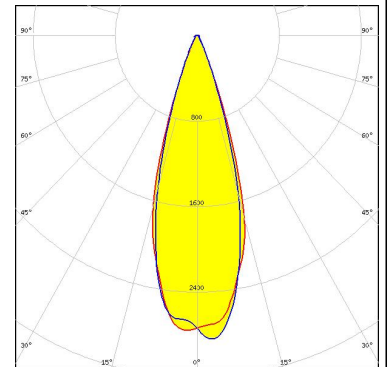

LUMILEDS


LED LUXEON C
 FWHM 31.0°
 Efficiency 88 %
 Peak intensity 3.000 cd/lm
 LEDs/each optic 1
 Light colour White
 Required components:

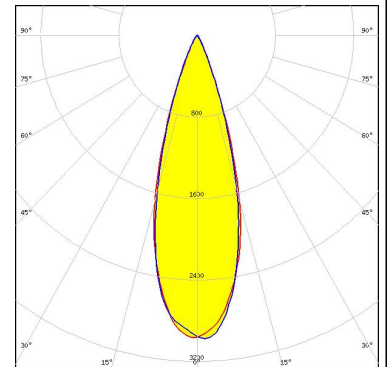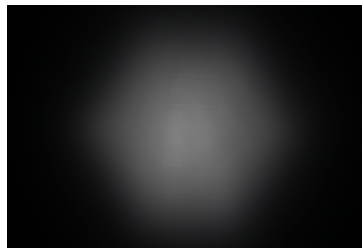

PHOTOMETRIC DATA (MEASURED):


LUMILEDS

LED LUXEON CZ
 FWHM 34.0°
 Efficiency 94 %
 Peak intensity 3.100 cd/lm
 LEDs/each optic 1
 Light colour White
 Required components:

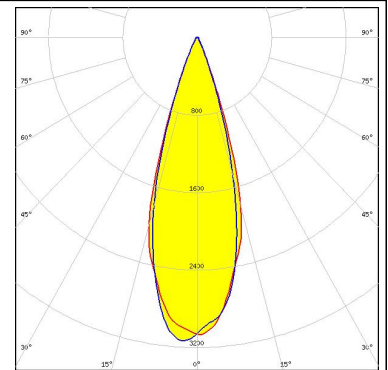



LUMILEDS

LED LUXEON T
 FWHM 31.0°
 Efficiency 87 %
 Peak intensity 2.800 cd/lm
 LEDs/each optic 1
 Light colour White
 Required components:

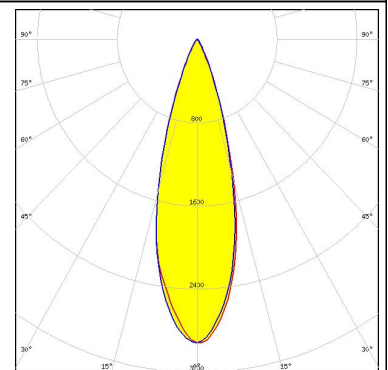

LUMILEDS

LED LUXEON TX
 FWHM 33.0°
 Efficiency 88 %
 Peak intensity 2.700 cd/lm
 LEDs/each optic 1
 Light colour White
 Required components:

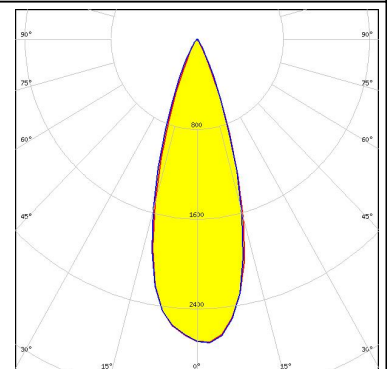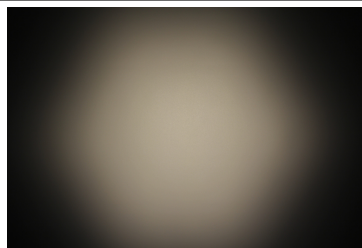



NICHIA

LED NCSxx19A
 FWHM 32.0°
 Efficiency 86 %
 Peak intensity 2.500 cd/lm
 LEDs/each optic 1
 Light colour White
 Required components:

PHOTOMETRIC DATA (MEASURED):




LED NCSxx19B
 FWHM 33.0°
 Efficiency 88 %
 Peak intensity 2.800 cd/lm
 LEDs/each optic 1
 Light colour White
 Required components:

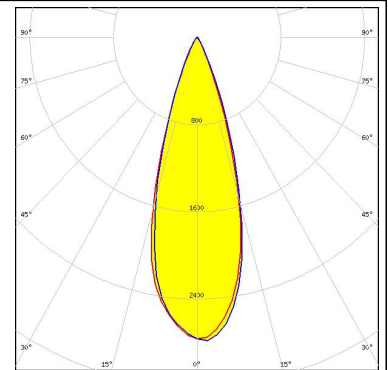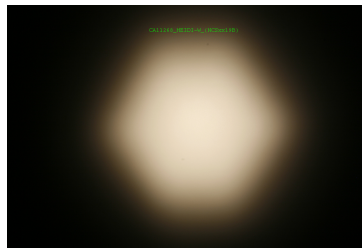



LED NVSxx19A
 FWHM 32.0°
 Efficiency 86 %
 Peak intensity 2.250 cd/lm
 LEDs/each optic 1
 Light colour White
 Required components:



LED NVSxx19B/NVSxx19C
 FWHM 32.0°
 Efficiency 87 %
 Peak intensity 2.600 cd/lm
 LEDs/each optic 1
 Light colour White
 Required components:

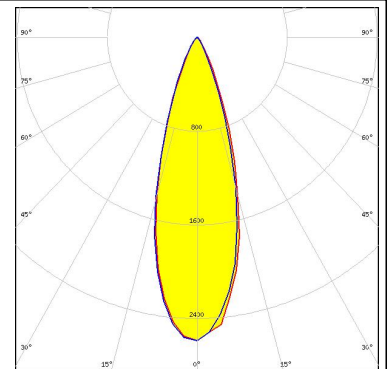

LED OSLOM Square CSSRM2/CSSRM3
 FWHM 32.0°
 Efficiency 86 %
 Peak intensity 3.000 cd/lm
 LEDs/each optic 1
 Light colour White
 Required components:

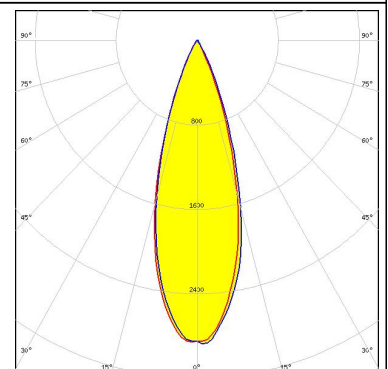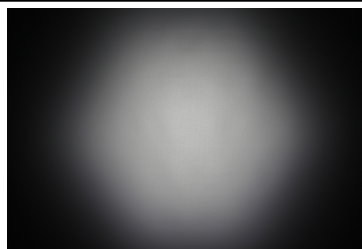


PHOTOMETRIC DATA (MEASURED):

OSRAM

Opto Semiconductors


LED OSLON SSL 150
 FWHM 32.0°
 Efficiency 88 %
 Peak intensity 2.750 cd/lm
 LEDs/each optic 1
 Light colour White
 Required components:

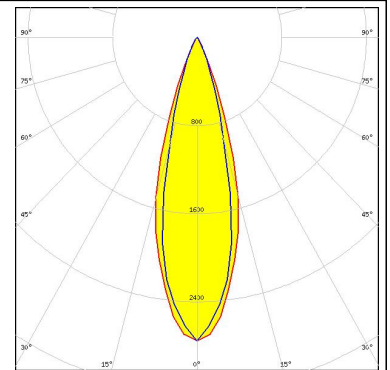

OSRAM



Opto Semiconductors

LED OSLON SSL 80
 FWHM 32.0°
 Efficiency 86 %
 Peak intensity 2.650 cd/lm
 LEDs/each optic 1
 Light colour White
 Required components:

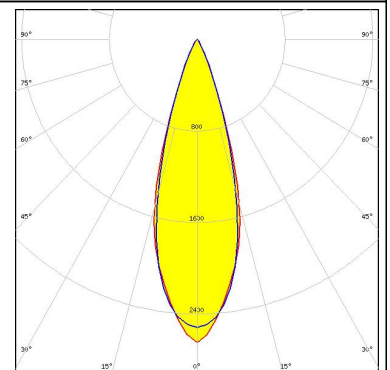



SAMSUNG

LED LH181A
 FWHM 31.0°
 Efficiency 94 %
 Peak intensity 2.500 cd/lm
 LEDs/each optic 1
 Light colour White
 Required components:

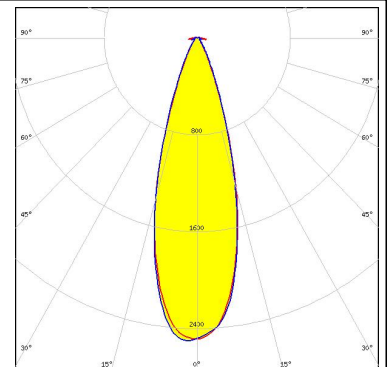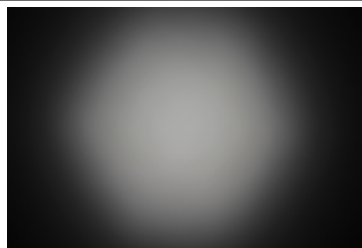

SAMSUNG


LED LH181B
 FWHM 31.0°
 Efficiency 92 %
 Peak intensity 2.700 cd/lm
 LEDs/each optic 1
 Light colour White
 Required components:

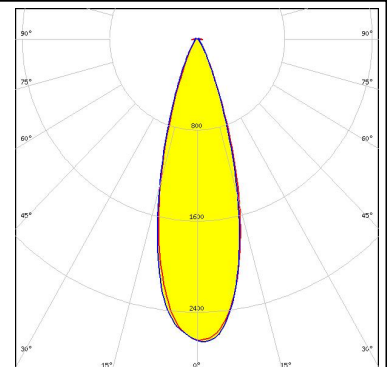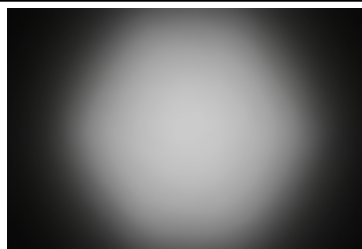

PHOTOMETRIC DATA (MEASURED):



SAMSUNG

LED LH351B
 FWHM 32.0°
 Efficiency 94 %
 Peak intensity 2.700 cd/lm
 LEDs/each optic 1
 Light colour White
 Required components:

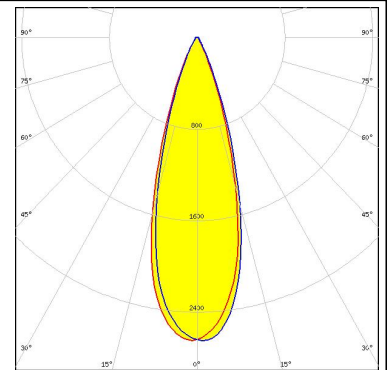


SAMSUNG

LED LH351Z
 FWHM 34.0°
 Efficiency 88 %
 Peak intensity 2.700 cd/lm
 LEDs/each optic 1
 Light colour White
 Required components:

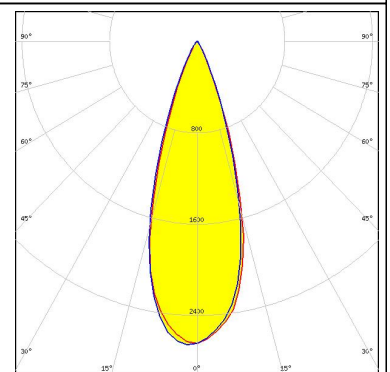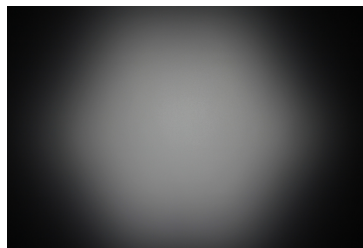



SEOUL SEMICONDUCTOR

LED Z5
 FWHM 32.0°
 Efficiency 86 %
 Peak intensity 3.040 cd/lm
 LEDs/each optic 1
 Light colour White
 Required components:

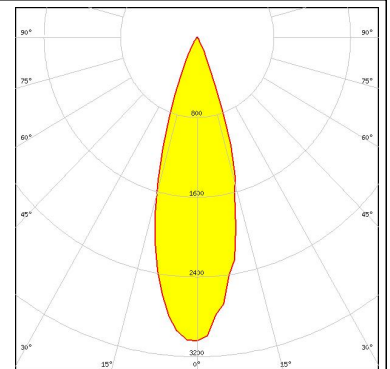

SEOUL SEMICONDUCTOR


LED Z5M1/Z5M2
 FWHM 32.0°
 Efficiency 91 %
 Peak intensity 2.800 cd/lm
 LEDs/each optic 1
 Light colour White
 Required components:

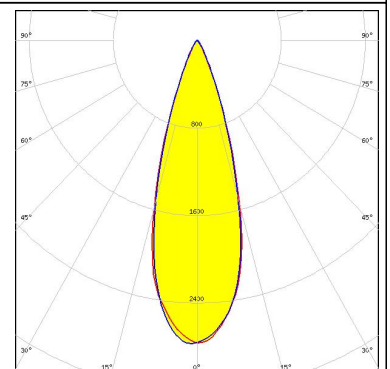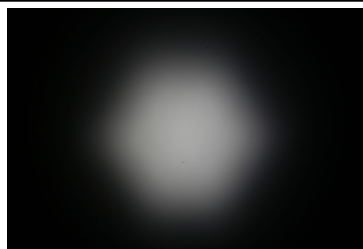


PHOTOMETRIC DATA (SIMULATED):




LED XP-G2
 FWHM 32.0°
 Efficiency 94 %
 Peak intensity 2.950 cd/lm
 LEDs/each optic 1
 Light colour White
 Required components:

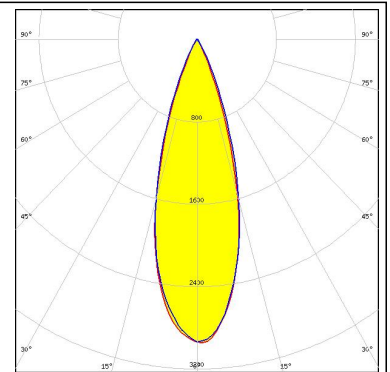


LED XP-G3
 FWHM 31.0°
 Efficiency 94 %
 Peak intensity 2.610 cd/lm
 LEDs/each optic 1
 Light colour White
 Required components:

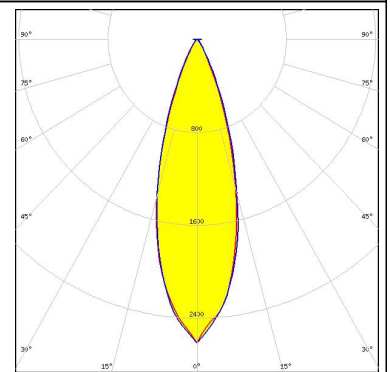

LED XT-E
 FWHM 31.8°
 Efficiency 94 %
 Peak intensity 2.770 cd/lm
 LEDs/each optic 1
 Light colour White
 Required components:

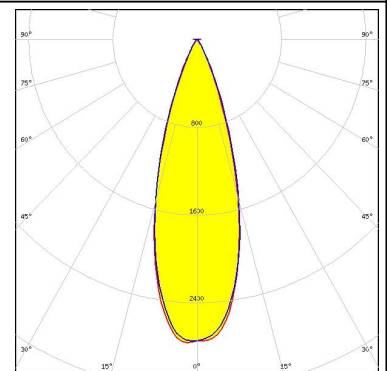


LED LUXEON SunPlus 20 Line (120 deg)
 FWHM 31.0°
 Efficiency 95 %
 Peak intensity 3.126 cd/lm
 LEDs/each optic 1
 Light colour White
 Required components:

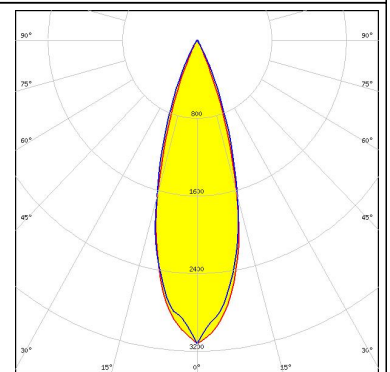

PHOTOMETRIC DATA (SIMULATED):


LUMILEDS

LED LUXEON SunPlus 20 Line (150 deg)
FWHM 31.0°
Efficiency 91 %
Peak intensity 2.921 cd/lm
LEDs/each optic 1
Light colour White
Required components:

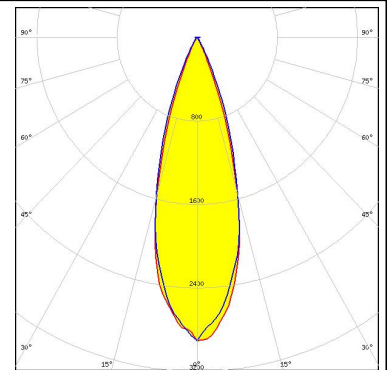


LUMILEDS

LED LUXEON Z ES
FWHM 30.0°
Efficiency 94 %
Peak intensity 3.370 cd/lm
LEDs/each optic 1
Light colour White
Required components:

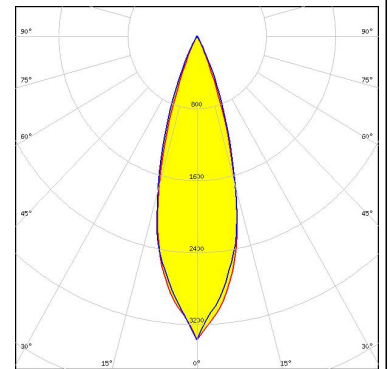


NICHIA

LED NVSxx19B/NVSxx19C
FWHM 32.0°
Efficiency 94 %
Peak intensity 2.823 cd/lm
LEDs/each optic 1
Light colour White
Required components:

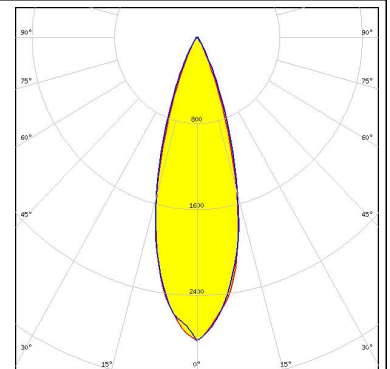

OSRAM Opto Semiconductors


LED OSCONIQ P 3030
FWHM 32.0°
Efficiency 97 %
Peak intensity 3.121 cd/lm
LEDs/each optic 1
Light colour White
Required components:

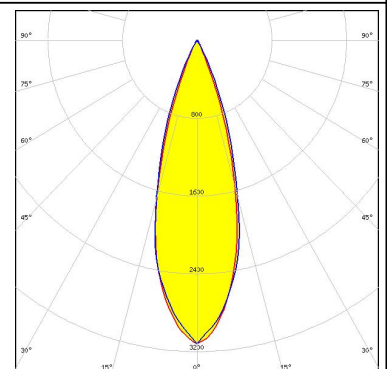

PHOTOMETRIC DATA (SIMULATED):


OSRAM
Opto Semiconductors

LED OSLON Square EC
FWHM 32.0°
Efficiency 94 %
Peak intensity 2.940 cd/lm
LEDs/each optic 1
Light colour White
Required components:

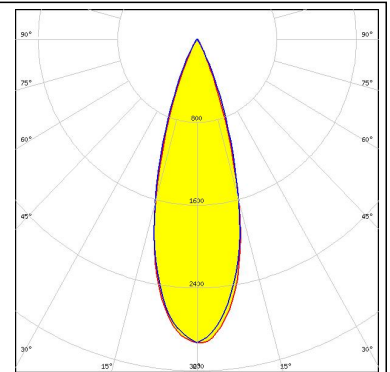

SAMSUNG


LED LM28xB Series
FWHM 31.0°
Efficiency 94 %
Peak intensity 2.690 cd/lm
LEDs/each optic 1
Light colour White
Required components:

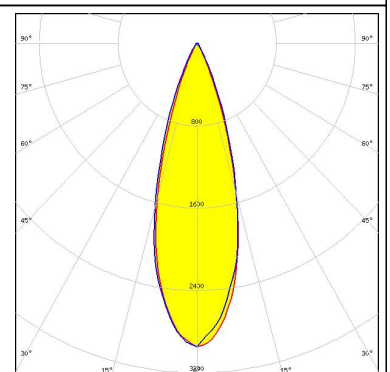

SEOL

SEOUL SEMICONDUCTOR

LED Z8Y22P
FWHM 32.0°
Efficiency 94 %
Peak intensity 2.739 cd/lm
LEDs/each optic 1
Light colour White
Required components:

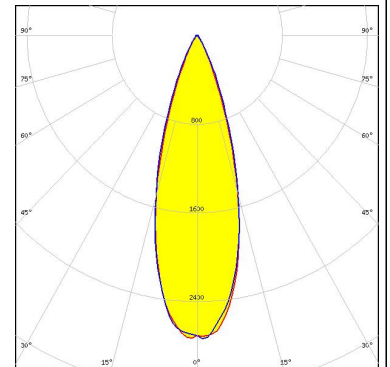

GENERAL INFORMATION:

NOTE: The typical beam angle will be changed by different color, chip size and chip position tolerance. The typical total beam angle is the full angle measured where the luminous intensity is half of the peak value.

MATERIALS:

As part of our continuous research and improvement processes, and to ensure the best possible quality and availability of our products, LEDiL reserves the right to change material grades without notice.

PRODUCT DATA USER AGREEMENT AND DISCLAIMER:

The measured data in the provided downloadable LEDiL Product Datasheets and Mechanical 2D-Drawings is rounded and provided as reference for planning. LEDiL Oy's optical specifications have been verified by conducting performance testing of the products in accordance with the company's quality system. The reported data are averaged results of multiple measurements with typical variation. LEDiL Oy reserves the right to without prior notification make changes and improvements to its products.

LEDiL Oy assumes neither warranty, nor guarantee nor any other liability of any kind for the contents and correctness of the provided data. The provided data has been generated with highest diligence but the provided data may in reality not represent the complete possible variation range of all intrinsic parameters. Therefore, in certain cases a deviation from the provided data could occur.

LEDiL Oy reserves the right to undertake technical changes of its products without further notification which could lead to changes in the provided data. LEDiL Oy assumes no liability of any kind for the possible deviation from any provided data or any other damage resulting from the usage of the provided data.

The user agrees to this disclaimer and user agreement with the download or usage of the provided files.

LEDiL Oy

Joensuunkatu 13
FI-24240 SALO
Finland

LEDiL Inc.

228 West Page Street
Suite D
Sycamore IL 60178
USA

Local sales and technical support

[www.ledil.com/
where_to_buy](http://www.ledil.com/where_to_buy)

Shipping locations

Salo, Finland
Hong Kong, China

Distribution Partners

[www.ledil.com/
where_to_buy](http://www.ledil.com/where_to_buy)

Mouser Electronics

Authorized Distributor

Click to View Pricing, Inventory, Delivery & Lifecycle Information:

[Ledi:](#)

[CA11268_HEIDI-W](#)