




DUAL-IN-LINE SOCKETS

SERIES 114 • SURFACE MOUNT, STUB TAIL • OPEN FRAME

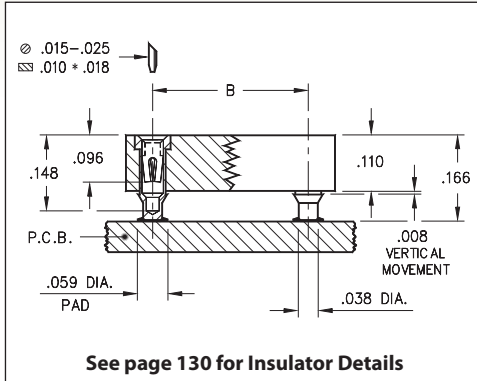

- Unique floating contacts compensate for the effects of unevenly dispensed solder paste
- Socket pins feature closed end construction eliminating any solder/flux wicking problems
- Hi-Rel, 4-finger BeCu #30 contact is rated at 3 amps. See page 253 for details
- Series 114 uses MM #1434 pins. See page 162 for details
- Insulators are high temperature thermoplastic, suitable for all soldering operations
- For Electrical, Mechanical and Environmental Data see page 264 for details

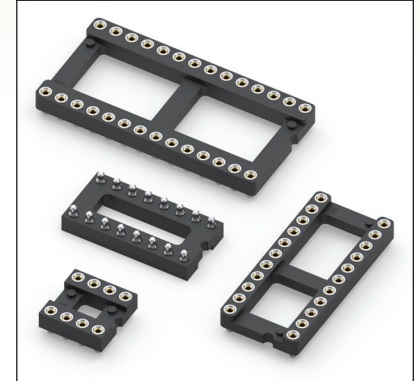

Total number of pins				Quantity per tube	ORDERING INFORMATION							
	A	B	C									
10	0.5	0.2	0.3	41	114-XX-210-41-117000							
4	0.2	0.3	0.4	100	114-XX-304-41-117000							
6	0.3	0.3	0.4	67	114-XX-306-41-117000							
8	0.4	0.3	0.4	50	114-XX-308-41-117000							
10	0.5	0.3	0.4	40	114-XX-310-41-117000							
14	0.7	0.3	0.4	28	114-XX-314-41-117000							
16	0.8	0.3	0.4	25	114-XX-316-41-117000							
18	0.9	0.3	0.4	22	114-XX-318-41-117000							
20	1.0	0.3	0.4	20	114-XX-320-41-117000							
22	1.1	0.3	0.4	18	114-XX-322-41-117000							
24	1.2	0.3	0.4	16	114-XX-324-41-117000							
28	1.4	0.3	0.4	14	114-XX-328-41-117000							
20	1.0	0.4	0.5	20	114-XX-420-41-117000							
22	1.1	0.4	0.5	18	114-XX-422-41-117000							
24	1.2	0.4	0.5	16	114-XX-424-41-117000							
28	1.4	0.4	0.5	14	114-XX-428-41-117000							
32	1.6	0.4	0.5	12	114-XX-432-41-117000							
24	1.2	0.6	0.7	16	114-XX-624-41-117000							
28	1.4	0.6	0.7	14	114-XX-628-41-117000							
32	1.6	0.6	0.7	12	114-XX-632-41-117000							
36	1.8	0.6	0.7	11	114-XX-636-41-117000							
40	2.0	0.6	0.7	10	114-XX-640-41-117000							
42	2.1	0.6	0.7	9	114-XX-642-41-117000							
48	2.4	0.6	0.7	8	114-XX-648-41-117000							
50	2.5	0.6	0.7	8	114-XX-650-41-117000							
52	2.6	0.6	0.7	7	114-XX-652-41-117000							
50	2.5	0.9	1.0	8	114-XX-950-41-117000							
52	2.6	0.9	1.0	7	114-XX-952-41-117000							
64	3.2	0.9	1.0	6	114-XX-964-41-117000							
SPECIFY PLATING CODE XX =						91	93		41 ◆	43 ◆	47 ◆	
Sleeve (Pin) 						200 μ" Sn/Pb	200 μ" Sn/Pb		200 μ" Sn	200 μ" Sn	200 μ" Sn	
Contact (Clip) 						10 μ" Au	30 μ" Au		10 μ" Au	30 μ" Au	Au Flash	

XX=Plating Code
See Below

RoHS-2
2011/65/EU



Mill-Max Mfg. Corp. • 190 Pine Hollow Road, P.O. Box 300, Oyster Bay, NY 11771 • 516-922-6000 • Fax: 516-922-9253 • www.mill-max.com

Mouser Electronics

Authorized Distributor

Click to View Pricing, Inventory, Delivery & Lifecycle Information:

Mill-Max:

[114-43-964-41-117000](#) [114-43-952-41-117000](#) [114-43-950-41-117000](#) [114-43-652-41-117000](#) [114-43-650-41-117000](#) [114-43-648-41-117000](#) [114-43-642-41-117000](#) [114-43-640-41-117000](#) [114-43-636-41-117000](#) [114-43-632-41-117000](#) [114-43-628-41-117000](#) [114-43-624-41-117000](#) [114-43-432-41-117000](#) [114-43-428-41-117000](#) [114-43-424-41-117000](#) [114-43-422-41-117000](#) [114-43-420-41-117000](#) [114-43-328-41-117000](#) [114-43-324-41-117000](#) [114-43-322-41-117000](#) [114-43-320-41-117000](#) [114-43-318-41-117000](#) [114-43-316-41-117000](#) [114-43-314-41-117000](#) [114-43-310-41-117000](#) [114-43-308-41-117000](#) [114-43-306-41-117000](#) [114-43-304-41-117000](#) [114-43-210-41-117000](#) [114-93-308-41-117000](#) [114-93-314-41-117000](#) [114-93-316-41-117000](#) [114-93-964-41-117000](#) [114-93-952-41-117000](#) [114-93-950-41-117000](#) [114-93-652-41-117000](#) [114-93-650-41-117000](#) [114-93-648-41-117000](#) [114-93-642-41-117000](#) [114-93-640-41-117000](#) [114-93-636-41-117000](#) [114-93-632-41-117000](#) [114-93-628-41-117000](#) [114-93-624-41-117000](#) [114-93-432-41-117000](#) [114-93-428-41-117000](#) [114-93-424-41-117000](#) [114-93-422-41-117000](#) [114-93-420-41-117000](#) [114-93-328-41-117000](#) [114-93-324-41-117000](#) [114-93-322-41-117000](#) [114-93-320-41-117000](#) [114-93-318-41-117000](#) [114-93-310-41-117000](#) [114-93-306-41-117000](#) [114-93-304-41-117000](#) [114-93-210-41-117000](#)