

MICRO SWITCH
a Honeywell Division

FED. MFG. CODE 91929


SWITCH - BASIC

CATALOG LISTING

BZ-2RW8072224286-A2

WHEN SEARCHING FOR THIS CATALOG LISTING WITHIN HONEYWELL'S INTERNAL SAP SYSTEM, THE LISTING MUST BE ENTERED WITHOUT DASHES (BZ2RW8072224286A2) DUE TO CHARACTER LIMITATIONS IMPOSED BY THE SYSTEM.

PRODUCT CODE: AQC8505

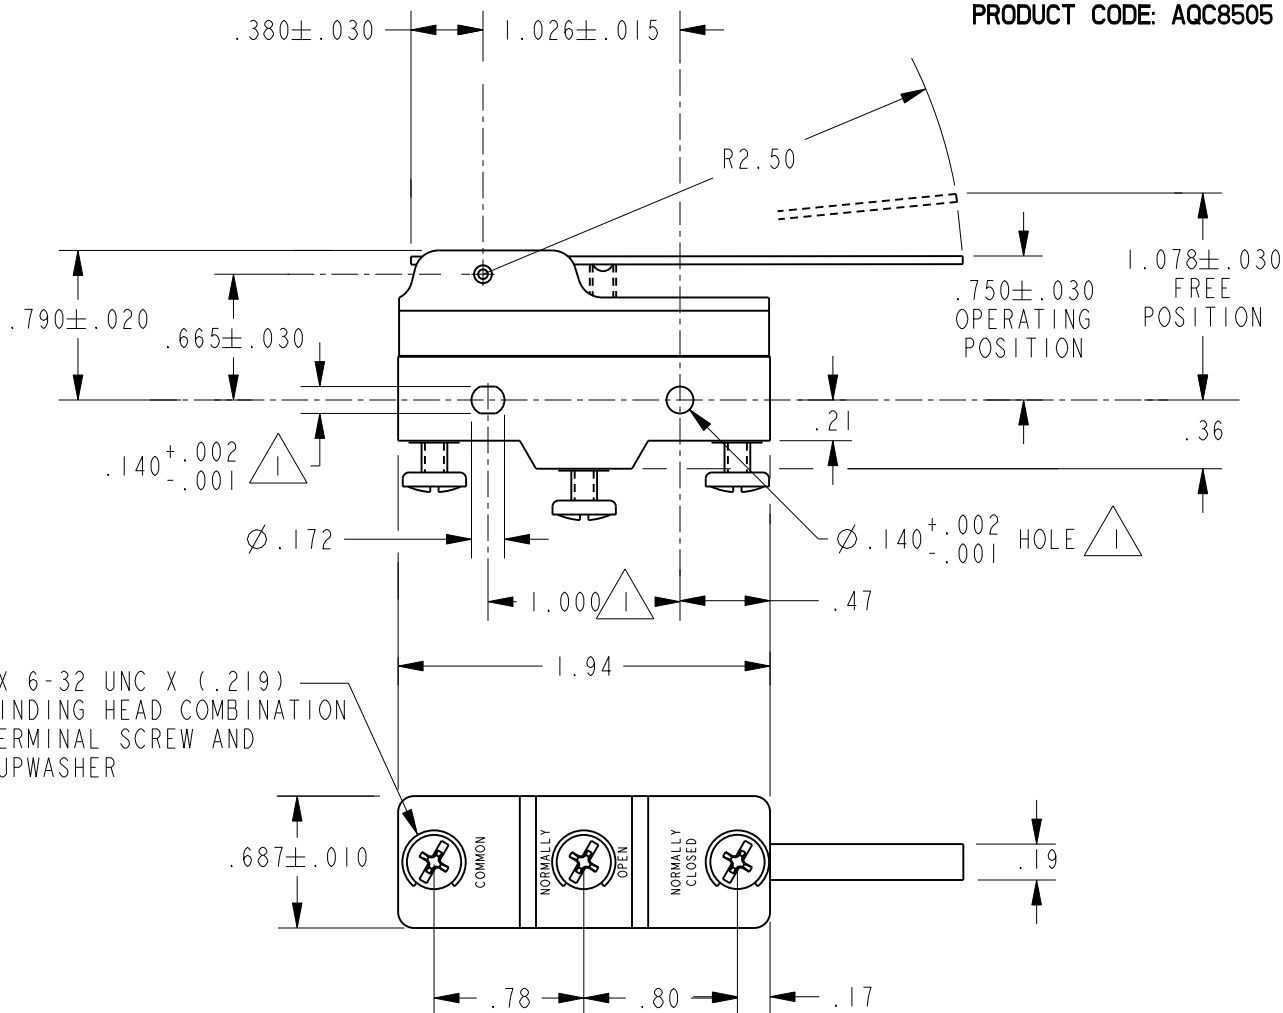

3X 6-32 UNC X (.219)
BINDING HEAD COMBINATION
TERMINAL SCREW AND
CUPWASHER


NOTES

- 1 MOUNTING HOLES WILL ACCEPT PINS OR SCREWS OF $\phi .139$ MAX ON $1.000 \pm .002$ CENTERS
- 2 - SWITCH WILL WITHSTAND TEMPERATURE OF 250°F
- 3 - CONTACT MATERIAL: GOLD ALLOY

ANSI Y14.5M-1982 APPLIES

THIS DRAWING COVERS A PROPRIETARY ITEM AND IS THE PROPERTY OF MICRO SWITCH, A DIVISION OF HONEYWELL. THIS DRAWING IS NOT TO BE COPIED OR USED WITHOUT THE APPROVAL OF MICRO SWITCH.

THIRD ANGLE PROJECTION



CHARACTERISTICS

OPERATING FORCE ----- 2 1/2 OZ MAX
RELEASE FORCE ----- 1/2 OZ MIN
DIFFERENTIAL TRAVEL ----- .007-.050
OVERTRAVEL ----- .219 MIN

ELECTRICAL DATA

CONTACT ARRANGEMENT
S P D T

L22

1A 125 VAC



L288
L307
L315

1A 250 V $\sim$ T85 25E3

SCALE NONE

DO NOT
SCALE PRINT

UNLESS OTHERWISE SPECIFIED
TOLERANCES ARE
ONE PLACE (.0) $\pm .030$
TWO PLACE (.00) $\pm .015$
THREE PLACE (.000) $\pm .005$
ANGLES $\pm$
WEIGHT .073 LB

CATALOG LISTING
BZ-2RW8072224286-A2

PAGE 1 OF 1



ISSUE
C

REVISIONS

A	0016786
SPK	23NOV05
B	0046794
MBH	09DEC08

23NOV05

09DEC08

09DEC08

09DEC08

09DEC08

09DEC08

09DEC08

09DEC08

09DEC08

09DEC08

09DEC08

09DEC08

09DEC08

09DEC08

09DEC08

09DEC08

09DEC08

09DEC08

09DEC08

PTC/CAD 2D

DRAWN

REPLACES XII 5057-BZ

RELEASE NO. 0001362

09DEC08

RS

CHECK

23NOV05

23NOV05

0046794

09DEC08

09DEC08

09DEC08

09DEC08

09DEC08

09DEC08

09DEC08

09DEC08

09DEC08

09DEC08

09DEC08

09DEC08

09DEC08

09DEC08

09DEC08

09DEC08

09DEC08

09DEC08

09DEC08

09DEC08

09DEC08

Mouser Electronics

Authorized Distributor

Click to View Pricing, Inventory, Delivery & Lifecycle Information:

[Honeywell:](#)

[SCN-2623SC](#)