
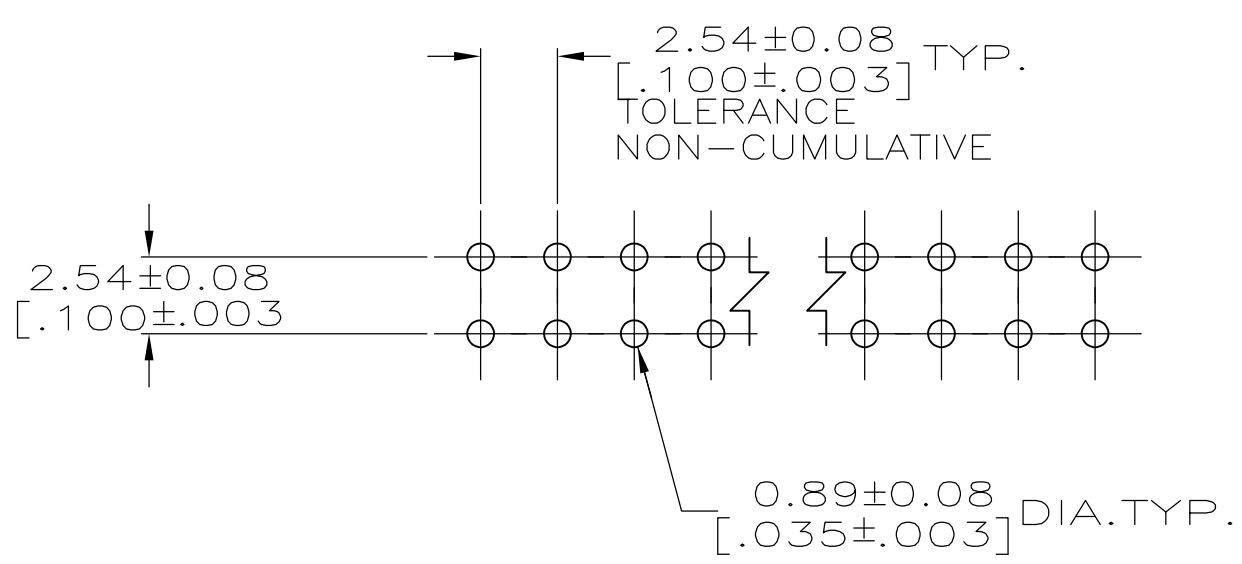
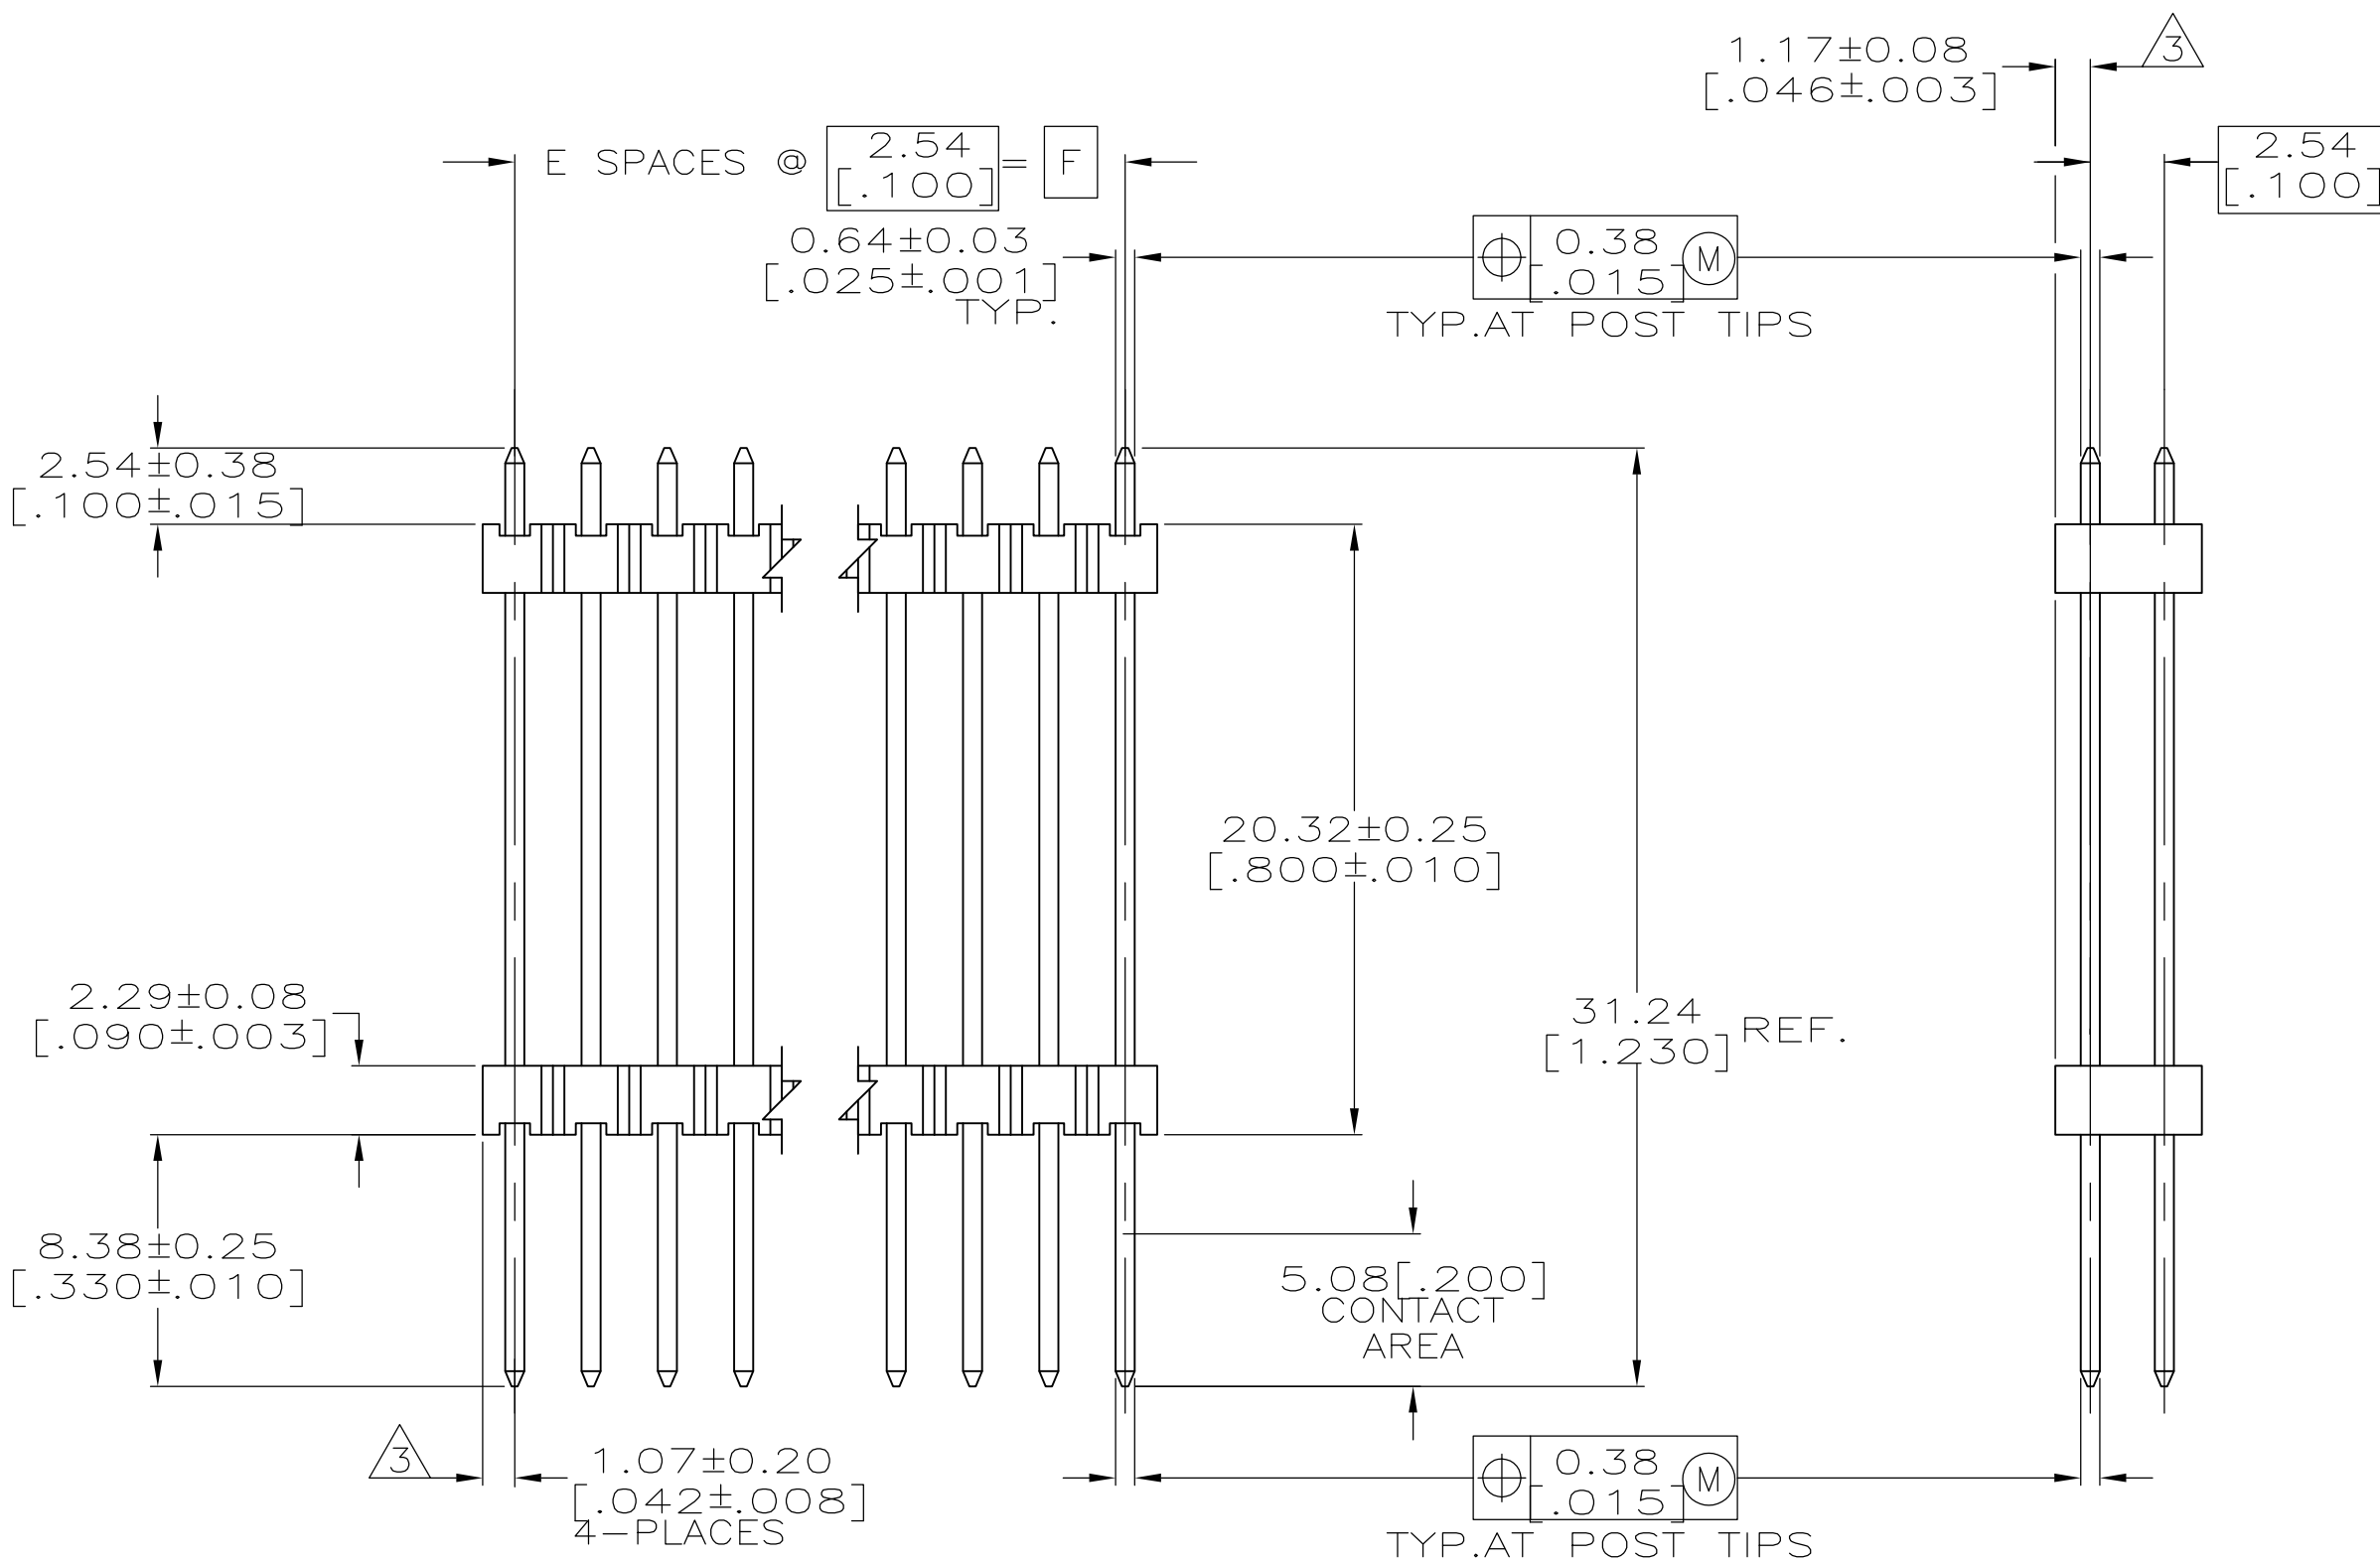


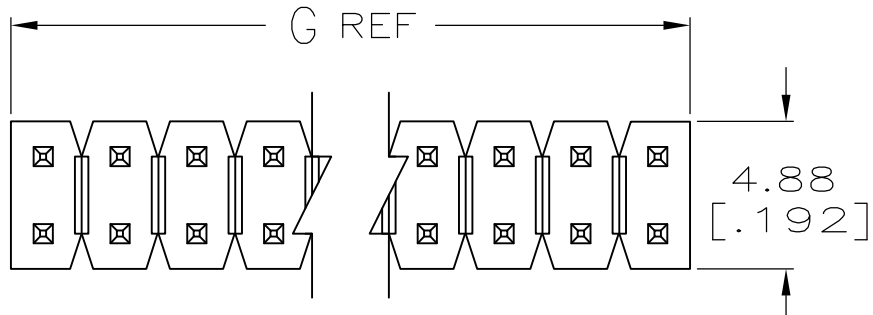

RECOMMENDED HOLE LAYOUT

1. ASSEMBLY MAY BE BROKEN TO THE DESIRED NUMBER OF POSITIONS
 2. TRUE POSITION TOLERANCE OF THE POST TIPS APPLIES WHEN THE HEADER IS HELD FLAT AGAINST THE PRINTED CIRCUIT BOARD
- 3 THE NOTED DIMENSIONS APPLY AT THE INTERSECTION OF THE POST AND HOUSING
- 4 HOUSING: FLAME RETARDANT THERMOPLASTIC; COLOR: BLACK.
- 5 FINISH: 0.000381 [.000015] GOLD ON CONTACT AREA, 0.00254-0.00508 [.000100-.000200] MATTE TIN-LEAD ON SOLDER TAIL, 0.00127 [.000050] NICKEL ENTIRE POST.
- 6 FINISH: 0.000381 [.000015] GOLD ON CONTACT AREA, 0.00254-0.00508 [.000100-.000200] MATTE TIN ON SOLDER TAIL, 0.00127 [.000050] NICKEL ENTIRE POST.

SEE SHEET 2 FOR PART NUMBER TABLES

THIS DRAWING IS A CONTROLLED DOCUMENT.

DWN
R BROWN

CHK
J GESFORD

APVD
J GESFORD

02MAR2006

02MAR2006

02MAR2006

TE Connectivity

NAME

HEADER ASSEMBLY, MOD II,
STACKING, DOUBLE ROW,
.025 SQ.POST, UNSHROUDED

DIMENSIONS:
mm [INCHES]

0 PLC ± -

1 PLC ± -

2 PLC ± 0.51[.02]

3 PLC ± 0.127[.005]

4 PLC ± 0.0127[.0005]

ANGLES ± -

02MAR2006

02MAR2006

02MAR2006

PRODUCT SPEC

APPLICATION SPEC

FINISH
SEE TABLE

SIZE
A1

CAGE CODE
00779

DRAWING NO
146503

RESTRICTED TO

—

WEIGHT
—

CUSTOMER DRAWING

SCALE
4:1

SHEET
1 OF 2

REV
A1

8

7

6

5

4

3

2

1

THIS DRAWING IS UNPUBLISHED.

RELEASED FOR PUBLICATION

ALL RIGHTS RESERVED.

LOCAD

DIST39

REV		LTR		DESCRIPTION		DATE	DWN	APVD
		-		SEE SHEET 1		-	-	-

6

PLATING	G	F	E	NO. OF POSITIONS	PART NUMBER
	101.19 [3.984]	99.06 [3.900]	39	80	9-146503-0
	98.65 [3.884]	96.52 [3.800]	38	78	8-146503-9
	96.11 [3.784]	93.98 [3.700]	37	76	8-146503-8
	93.57 [3.684]	91.44 [3.600]	36	74	8-146503-7
	91.03 [3.584]	88.90 [3.500]	35	72	8-146503-6
	88.49 [3.484]	86.36 [3.400]	34	70	8-146503-5
	85.95 [3.384]	83.82 [3.300]	33	68	8-146503-4
	83.41 [3.284]	81.28 [3.200]	32	66	8-146503-3
	80.87 [3.184]	78.74 [3.100]	31	64	8-146503-2
	78.33 [3.084]	76.20 [3.000]	30	62	8-146503-1
	75.79 [2.984]	73.66 [2.900]	29	60	8-146503-0
	73.25 [2.884]	71.12 [2.800]	28	58	7-146503-9
	70.71 [2.784]	68.58 [2.700]	27	56	7-146503-8
	68.17 [2.684]	66.04 [2.600]	26	54	7-146503-7
	65.63 [2.584]	63.50 [2.500]	25	52	7-146503-6
	63.09 [2.484]	60.96 [2.400]	24	50	7-146503-5
	60.55 [2.384]	58.42 [2.300]	23	48	7-146503-4
	58.01 [2.284]	55.88 [2.200]	22	46	7-146503-3
	55.47 [2.184]	53.34 [2.100]	21	44	7-146503-2
	52.93 [2.084]	50.80 [2.000]	20	42	7-146503-1
	50.39 [1.984]	48.26 [1.900]	19	40	7-146503-0
	47.85 [1.884]	45.72 [1.800]	18	38	6-146503-9
	45.31 [1.784]	43.18 [1.700]	17	36	6-146503-8
	42.77 [1.684]	40.64 [1.600]	16	34	6-146503-7
	40.23 [1.584]	38.10 [1.500]	15	32	6-146503-6
	37.69 [1.484]	35.56 [1.400]	14	30	6-146503-5
	35.15 [1.384]	33.02 [1.300]	13	28	6-146503-4
	32.61 [1.284]	30.48 [1.200]	12	26	6-146503-3
	30.07 [1.184]	27.94 [1.100]	11	24	6-146503-2
	27.53 [1.084]	25.40 [1.000]	10	22	6-146503-1
	24.99 [.984]	22.86 [.900]	9	20	6-146503-0
	22.45 [.884]	20.32 [.800]	8	18	5-146503-9
	19.91 [.784]	17.78 [.700]	7	16	5-146503-8
	17.37 [.684]	15.24 [.600]	6	14	5-146503-7
	14.83 [.584]	12.70 [.500]	5	12	5-146503-6
	12.29 [.484]	10.16 [.400]	4	10	5-146503-5
	9.75 [.384]	7.62 [.300]	3	8	5-146503-4
	7.21 [.284]	5.08 [.200]	2	6	5-146503-3
	4.67 [.184]	2.54 [.100]	1	4	5-146503-2
	2.13 [.084]	- -	-	2	5-146503-1

5

PLATING	G	F	E	NO. OF POSITIONS	PART NUMBER
	101.19 [3.984]	99.06 [3.900]	39	80	4-146503-0
	98.65 [3.884]	96.52 [3.800]	38	78	3-146503-9
	96.11 [3.784]	93.98 [3.700]	37	76	3-146503-8
	93.57 [3.684]	91.44 [3.600]	36	74	3-146503-7
	91.03 [3.584]	88.90 [3.500]	35	72	3-146503-6
	88.49 [3.484]	86.36 [3.400]	34	70	3-146503-5
	85.95 [3.384]	83.82 [3.300]	33	68	3-146503-4
	83.41 [3.284]	81.28 [3.200]	32	66	3-146503-3
	80.87 [3.184]	78.74 [3.100]	31	64	3-146503-2
	78.33 [3.084]	76.20 [3.000]	30	62	3-146503-1
	75.79 [2.984]	73.66 [2.900]	29	60	3-146503-0
	73.25 [2.884]	71.12 [2.800]	28	58	2-146503-9
	70.71 [2.784]	68.58 [2.700]	27	56	2-146503-8
	68.17 [2.684]	66.04 [2.600]	26	54	2-146503-7
	65.63 [2.584]	63.50 [2.500]	25	52	2-146503-6
	63.09 [2.484]	60.96 [2.400]	24	50	2-146503-5
	60.55 [2.384]	58.42 [2.300]	23	48	2-146503-4
	58.01 [2.284]	55.88 [2.200]	22	46	2-146503-3
	55.47 [2.184]	53.34 [2.100]	21	44	2-146503-2
	52.93 [2.084]	50.80 [2.000]	20	42	2-146503-1
	50.39 [1.984]	48.26 [1.900]	19	40	2-146503-0
	47.85 [1.884]	45.72 [1.800]	18	38	1-146503-9
	45.31 [1.784]	43.18 [1.700]	17	36	1-146503-8
	42.77 [1.684]	40.64 [1.600]	16	34	1-146503-7
	40.23 [1.584]	38.10 [1.500]	15	32	1-146503-6
	37.69 [1.484]	35.56 [1.400]	14	30	1-146503-5
	35.15 [1.384]	33.02 [1.300]	13	28	1-146503-4
	32.61 [1.284]	30.48 [1.200]	12	26	1-146503-3
	30.07 [1.184]	27.94 [1.100]	11	24	1-146503-2
	27.53 [1.084]	25.40 [1.000]	10	22	1-146503-1
	24.99 [.984]	22.86 [.900]	9	20	1-146503-0
	22.45 [.884]	20.32 [.800]	8	18	146503-9
	19.91 [.784]	17.78 [.700]	7	16	146503-8
	17.37 [.684]	15.24 [.600]	6	14	146503-7
	14.83 [.584]	12.70 [.500]	5	12	146503-6
	12.29 [.484]	10.16 [.400]	4	10	146503-5
	9.75 [.384]	7.62 [.300]	3	8	146503-4
	7.21 [.284]	5.08 [.200]	2	6	146503-3
	4.67 [.184]	2.54 [.100]	1	4	146503-2
	2.13 [.084]	- -	-	2	146503-1

THIS DRAWING IS UNPUBLISHED.

RELEASED FOR PUBLICATION

ALL RIGHTS RESERVED.

LOCAD

DIST39

REV		LTR		DESCRIPTION		DATE	DWN	APVD
		-		SEE SHEET 1		-	-	-

6

PLATING	G	F	E	NO. OF POSITIONS	PART NUMBER
	101.19 [3.984]	99.06 [3.900]	39	80	9-146503-0
	98.65 [3.884]	96.52 [3.800]	38	78	8-146503-9
	96.11 [3.784]	93.98 [3.700]	37	76	8-146503-8
	93.57 [3.684]	91.44 [3.600]	36	74	8-146503-7
	91.03 [3.584]	88.90 [3.500]	35	72	8-146503-6
	88.49 [3.484]	86.36 [3.400]	34	70	8-146503-5
	85.95 [3.384]	83.82 [3.300]	33	68	8-146503-4
	83.41 [3.284]	81.28 [3.200]	32	66	8-146503-3
	80.87 [3.184]	78.74 [3.100]	31	64	8-146503-2
	78.33 [3.084]	76.20 [3.000]	30	62	8-146503-1
	75.79 [2.984]	73.66 [2.900]	29	60	8-146503-0
	73.25 [2.884]	71.12 [2.800]	28	58	7-146503-9
	70.71 [2.784]	68.58 [2.700]	27	56	7-146503-8
	68.17 [2.684]	66.04 [2.600]	26	54	7-146503-7
	65.63 [2.584]	63.50 [2.500]	25	52	7-146503-6
	63.09 [2.484]	60.96 [2.400]	24	50	7-146503-5
	60.55 [2.384]	58.42 [2.300]	23	48	7-146503-4
	58.01 [2.284]	55.88 [2.200]	22	46	7-146503-3
	55.47 [2.184]	53.34 [2.100]	21	44	7-146503-2
	52.93 [2.084]	50.80 [2.000]	20	42	7-146503-1
	50.39 [1.984]	48.26 [1.900]	19	40	7-146503-0
	47.85 [1.884]	45.72 [1.800]	18	38	6-146503-9
	45.31 [1.784]	43.18 [1.700]	17	36	6-146503-8
	42.77 [1.684]	40.64 [1.600]	16	34	6-146503-7
	40.23 [1.584]	38.10 [1.500]	15	32	6-146503-6
	37.69 [1.484]	35.56 [1.400]	14	30	6-146503-5
	35.15 [1.384]	33.02 [1.300]	13	28	6-146503-4
	32.61 [1.284]	30.48 [1.200]	12	26	6-146503-3
	30.07 [1.184]	27.94 [1.100]	11	24	6-146503-2
	27.53 [1.084]	25.40 [1.000]	10	22	6-146503-1
	24.99 [.984]	22.86 [.900]	9	20	6-146503-0
	22.45 [.884]	20.32 [.800]	8	18	5-146503-9
	19.91 [.784]	17.78 [.700]	7	16	5-146503-8
	17.37 [.684]	15.24 [.600]	6	14	5-146503-7
	14.83 [.584]	12.70 [.500]	5	12	5-146503-6
	12.29 [.484]	10.16 [.400]	4	10	5-146503-5
	9.75 [.384]	7.62 [.300]	3	8	5-146503-4
	7.21 [.284]	5.08 [.200]	2	6	5-146503-3
	4.67 [.184]	2.54 [.100]	1	4	5-146503-2
	2.13 [.084]	- -	-	2	5-146503-1

5

PLATING	G	F	E	NO. OF POSITIONS	PART NUMBER
	101.19 [3.984]	99.06 [3.900]	39	80	4-146503-0
	98.65 [3.884]	96.52 [3.800]	38	78	3-146503-9
	96.11 [3.784]	93.98 [3.700]	37	76	3-146503-8
	93.57 [3.684]	91.44 [3.600]	36	74	3-146503-7
	91.03 [3.584]	88.90 [3.500]	35	72	3-146503-6
	88.49 [3.484]	86.36 [3.400]	34	70	3-146503-5
	85.95 [3.384]	83.82 [3.300]	33	68	3-146503-4
	83.41 [3.284]	81.28 [3.200]	32	66	3-146503-3
	80.87 [3.184]	78.74 [3.100]	31	64	3-146503-2
	78.33 [3.084]	76.20 [3.000]	30	62	3-146503-1
	75.79 [2.984]	73.66 [2.900]	29	60	3-146503-0
	73.25 [2.884]	71.12 [2.800]	28	58	2-146503-9
	70.71 [2.784]	68.58 [2.700]	27	56	2-146503-8
	68.17 [2.684]	66.04 [2.600]	26	54	2-146503-7
	65.63 [2.584]	63.50 [2.500]	25	52	2-146503-6
	63.09 [2.484]	60.96 [2.400]	24	50	2-146503-5
	60.55 [2.384]	58.42 [2.300]	23	48	2-146503-4
	58.01 [2.284]	55.88 [2.200]	22	46	2-146503-3
	55.47 [2.184]	53.34 [2.100]	21	44	2-146503-2
	52.93 [2.084]	50.80 [2.000]	20	42	2-146503-1
	50.39 [1.984]	48.26 [1.900]	19	40	2-146503-0
	47.85 [1.884]	45.72 [1.800]	18	38	1-146503-9
	45.31 [1.784]	43.18 [1.700]	17	36	1-146503-8
	42.77 [1.684]	40.64 [1.600]	16	34	1-146503-7
	40.23 [1.584]	38.10 [1.500]	15	32	1-146503-6
	37.69 [1.484]	35.56 [1.400]	14	30	1-146503-5
	35.15 [1.384]	33.02 [1.300]	13	28	1-146503-4
	32.61 [1.284]	30.48 [1.200]	12	26	1-146503-3
	30.07 [1.184]	27.94 [1.100]	11	24	1-146503-2
	27.53 [1.084]	25.40 [1.000]	10	22	1-146503-1
	24.99 [.984]	22.86 [.900]	9	20	1-146503-0
	22.45 [.884]	20.32 [.800]	8	18	146503-9
	19.91 [.784]	17.78 [.700]	7	16	146503-8
	17.37 [.684]	15.24 [.600]	6	14	146503-7
	14.83 [.584]	12.70 [.500]	5	12	146503-6
	12.29 [.484]	10.16 [.400]	4	10	146503-5
	9.75 [.384]	7.62 [.300]	3	8	146503-4
	7.21 [.284]	5.08 [.200]	2	6	146503-3
	4.67 [.184]	2.54 [.100]	1	4	146503-2
	2.13 [.084]	- -	-	2	146503-1

THIS DRAWING IS A CONTROLLED DOCUMENT.

11-NOV-96

CHK: E. BRANDBERG

11-NOV-96

APVD: G. DUBNICZKI

11-NOV-96

PRODUCT SPEC

NAME

APPLICATION SPEC

SIZE

WEIGHT

CAGE CODE

DRAWING NO.

RESTRICTED TO

MATERIAL

4

FINISH

Mouser Electronics

Authorized Distributor

Click to View Pricing, Inventory, Delivery & Lifecycle Information:

[TE Connectivity:](#)

[146503-2](#)