

PLEASE CHECK WWW.MOLEX.COM FOR LATEST PART INFORMATION

Part Number: [0768710008](#)
Status: **Active**
Overview: [QSFP+ Interconnect Solution](#)
Description: Quad Small Form-factor Pluggable Plus (QSFP) Assembly, Stacked 2 by 1 with Elastomer Gaskets and Outer Light Pipes - Up/Down, Tin

Documents:

3D Model	Application Specification AS-76870-001-001 (PDF)
Drawing (PDF)	Application Specification AS-76871-0002-001 (PDF)
Product Specification PS-76870-001-001 (PDF)	RoHS Certificate of Compliance (PDF)

Agency Certification

UL E29179


General

Product Family	I/O Connectors
Series	76871
Application	Module-to-Board
Component Type	Receptacle
Electrical Model	Yes
Overview	QSFP+ Interconnect Solution
Product Name	QSFP
Type	N/A
UPC	884982637320

Physical

Boot Color	N/A
Circuits (Loaded)	76
Circuits (maximum)	76
Durability (mating cycles max)	100
Flammability	94V-0
Gender	Female
Keying to Mating Part	None
Lock to Mating Part	Yes
Material - Metal	Phosphor Bronze
Material - Plating Mating	Gold
Material - Plating Termination	Tin
Net Weight	40.180/g
Number of Rows	2
Orientation	Right Angle
PC Tail Length	1.25mm
PCB Locator	Yes
PCB Retention	Yes
PCB Thickness - Recommended	1.57mm
Packaging Type	Tray
Panel Mount	No
Pitch - Mating Interface	0.80mm
Pitch - Termination Interface	0.80mm
Polarized to Mating Part	Yes
Polarized to PCB	Yes
Ports	2
Surface Mount Compatible (SMC)	No
Temperature Range - Operating	-40°C to +85°C
Termination Interface: Style	Through Hole - Compliant Pin
Waterproof / Dustproof	No

Electrical

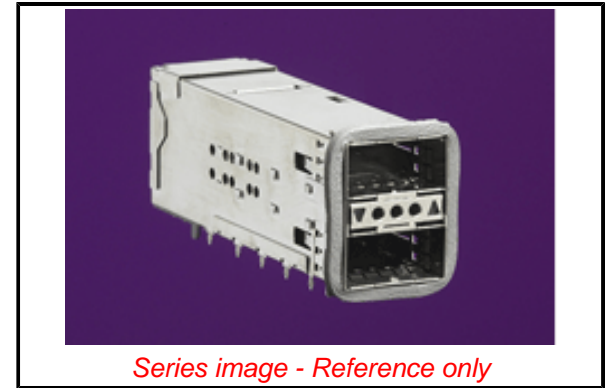

Series image - Reference only

EU ELV

Not Relevant

EU RoHS

Compliant

REACH SVHC

Not Contained Per -
ED/30/2017 (7 July
2017)

Halogen-Free

Status

Low-Halogen

Need more information on product environmental compliance?

Email productcompliance@molex.com
Please visit the [Contact Us](#) section for any non-product compliance questions.

China ROHS

ELV

RoHS Phthalates

Green Image

Not Relevant

Not Contained

Search Parts in this Series

[76871](#) Series

Use With

[74757](#) , [74758](#)

Current - Maximum per Contact	0.5A
Grounding to Panel	None
Shield Type	EMI Gasket
Shielded	Yes
Voltage - Maximum	120V AC (RMS)/DC

Solder Process Data

Lead-free Process Capability	N/A
------------------------------	-----

Material Info**Reference - Drawing Numbers**

Application Specification	AS-76870-001-001, AS-76871-0002-001
Electrical Model Document	EE-76870-001
Product Specification	PS-76870-001-001
S-Parameter Model	SP-76870-001
Sales Drawing	SD-76871-001

This document was generated on 02/27/2018

PLEASE CHECK WWW.MOLEX.COM FOR LATEST PART INFORMATION

Mouser Electronics

Authorized Distributor

Click to View Pricing, Inventory, Delivery & Lifecycle Information:

[Molex:](#)

[76871-0008](#)