

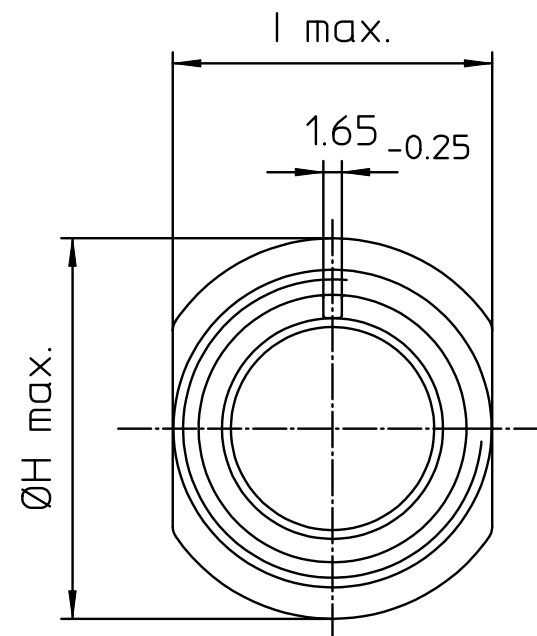


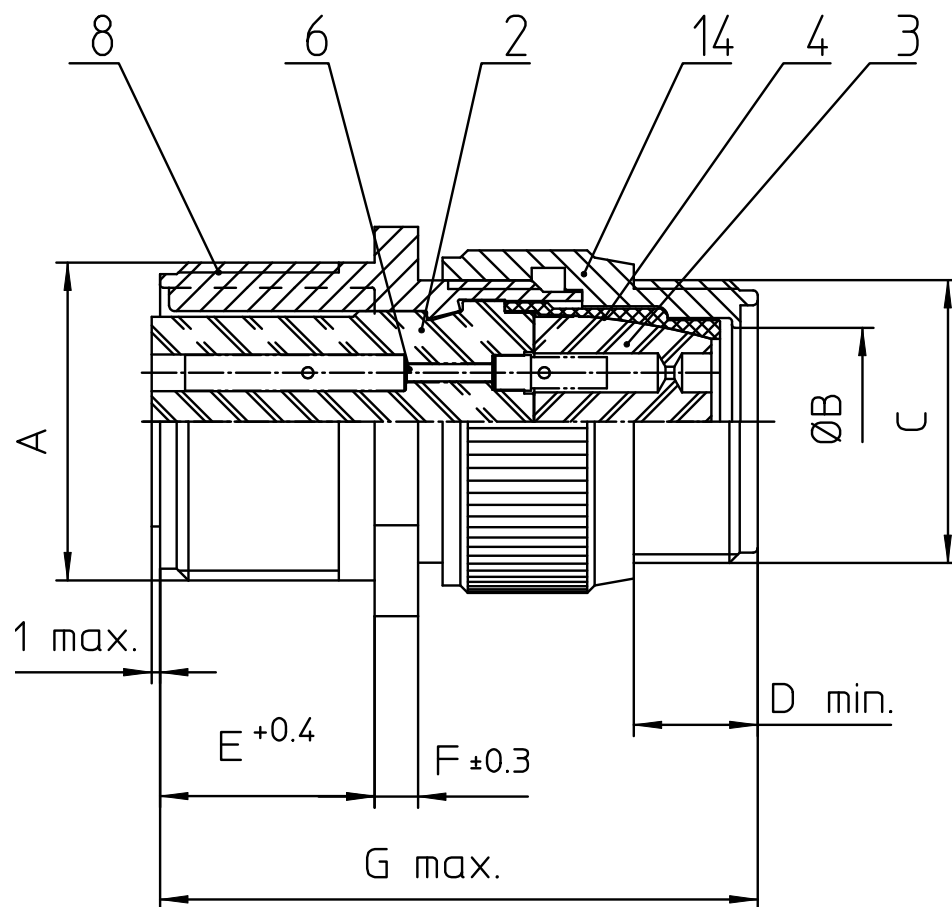

NO.	MASSE / DIMENSION
A	1 1/2-18NEF-2A
B	25.4
C	1 7/16-18NEF-2A
D	9.5
E	20.6
F	4
G	59
H	43.8
I	38.4



NO.	BESCHREIBUNG / DESCRIPTION
2	ISOLIERKÖRPER BUCHSE / INSULATOR SOCKET
3	DICHTKÖRPER / GROMMET
4	ENDRING / ENDRING
6	KONTAKTBUCHSE / CONTACT SOCKET
8	DOSENGEHÄUSE / SHELL
14	F-ENDGEHÄUSE / F-ENDBELL

Note: Due to an automatic nomenclature system, numbers generated may not be sequential.
 Specification and Dimensions subject to change
 Drawings illustrate normal insulator positioning

Material Specification:	
Shell Material:	Aluminium alloy
Shell Plating:	Olive drab chromate coating over cadmium plating
Insulator Material:	Neoprene
Contact Material:	Copper alloy
Contact Plating:	Hard silver

all dimensions are in mm Dimensions without tolerance indications are general tolerances in acc. with DIN7168m		drawing for CUSTOMER	
 ITT <i>Engineered for life</i> ITT CANNON GmbH D - 71384 Weinstadt/Germany		description CA3101F24-9S Cable connecting plug Endbell for flex tube Solder Cup / Socket / Layout: 24-9	
© All rights reserved. Reproduction or issue to third in any form whoever is only permitted with written authorization of ITT Cannon		page 1/1	revision 1001 16. Jul 20