



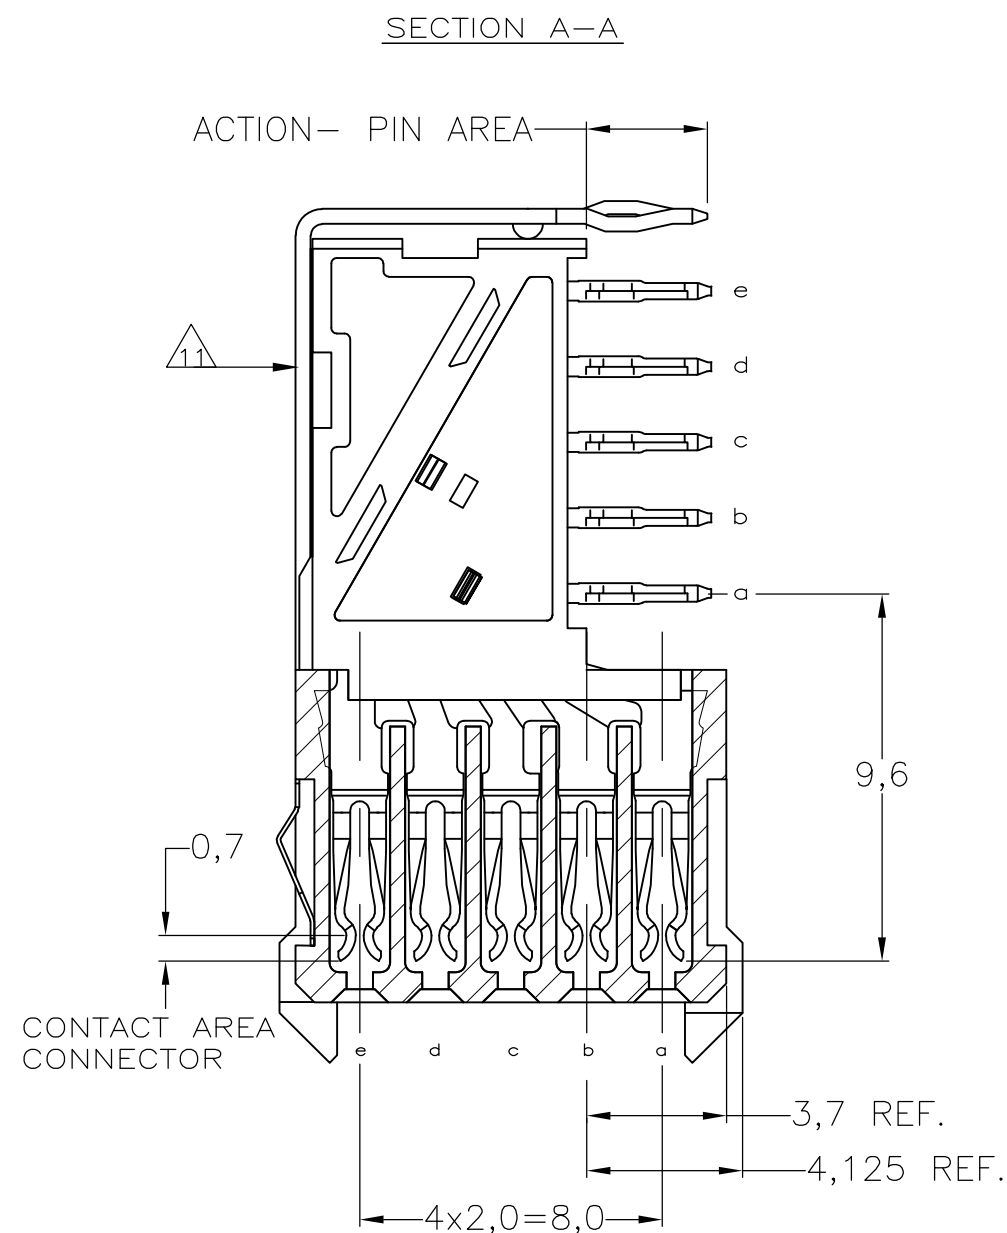

- ① MATERIAL CONTACTS; PHOSPHORBRONZE
MATERIAL SHIELD ; PHOSPHORBRONZE
MATERIAL HOUSING; GLASSFILLED POLYESTER (GRAY)
- ② GENERAL PLATING SPECIFICATION: UNDERPLATING
(ENTIRE CONTACT): 1,27μm NICKEL MIN.AND ACTION
PIN: 0,5μm TIN-LEAD MIN.
FOR PLATING OF MATING SURFACES SEE APPLICABLE
SPECIFICATION REFERENCE FOR EACH DASH NUMBER.
- ③ CONFORMS TO ALL TESTING ACCORDING IEC 61076-4-101
PERFORMANCE LEVEL 2.
- ④ CONFORMS TO ALL TESTING ACCORDING IEC 61076-4-101
PERFORMANCE LEVEL 1.
- ⑤ CONNECTOR TESTED AND QUALIFIED AGAINST TELCORDIA GR-1217-CORE
QUALITY LEVEL III,CENTRAL OFFICE APPLICATIONS.
- ⑥ CONNECTOR LUBRICATED WITH TELCORDIA GR-1217-CORE
APPROVED LUBRICANT.
- ⑧ ASSEMBLY PRINTED WITH P/N AND DATECODE
THE MARKING CAN APPEAR ON THE FRONT SIDE
OR BACK SIDE.
- ⑨ HOLE PATTERN FOR FEMALE CONNECTOR TYPE C
55 PLATED-THROUGH HOLES AT 2x2mm SQUARE GRID
- ⑩ ROW "f" 6 PLATED THROUGH HOLES FOR UPPERSHIELD
- ⑪ SHIELD MOUNTED ON CONNECTOR WITH DOUBLE SIDED
ADHESIVE TAPE OR ADHESIVE
12. FITS WITH LOWERSHIELD, BASIC PARTNUMBER : 352112.
- ⑬ 0.76μm MIN GOLD PLATING AT MATING SURFACES.

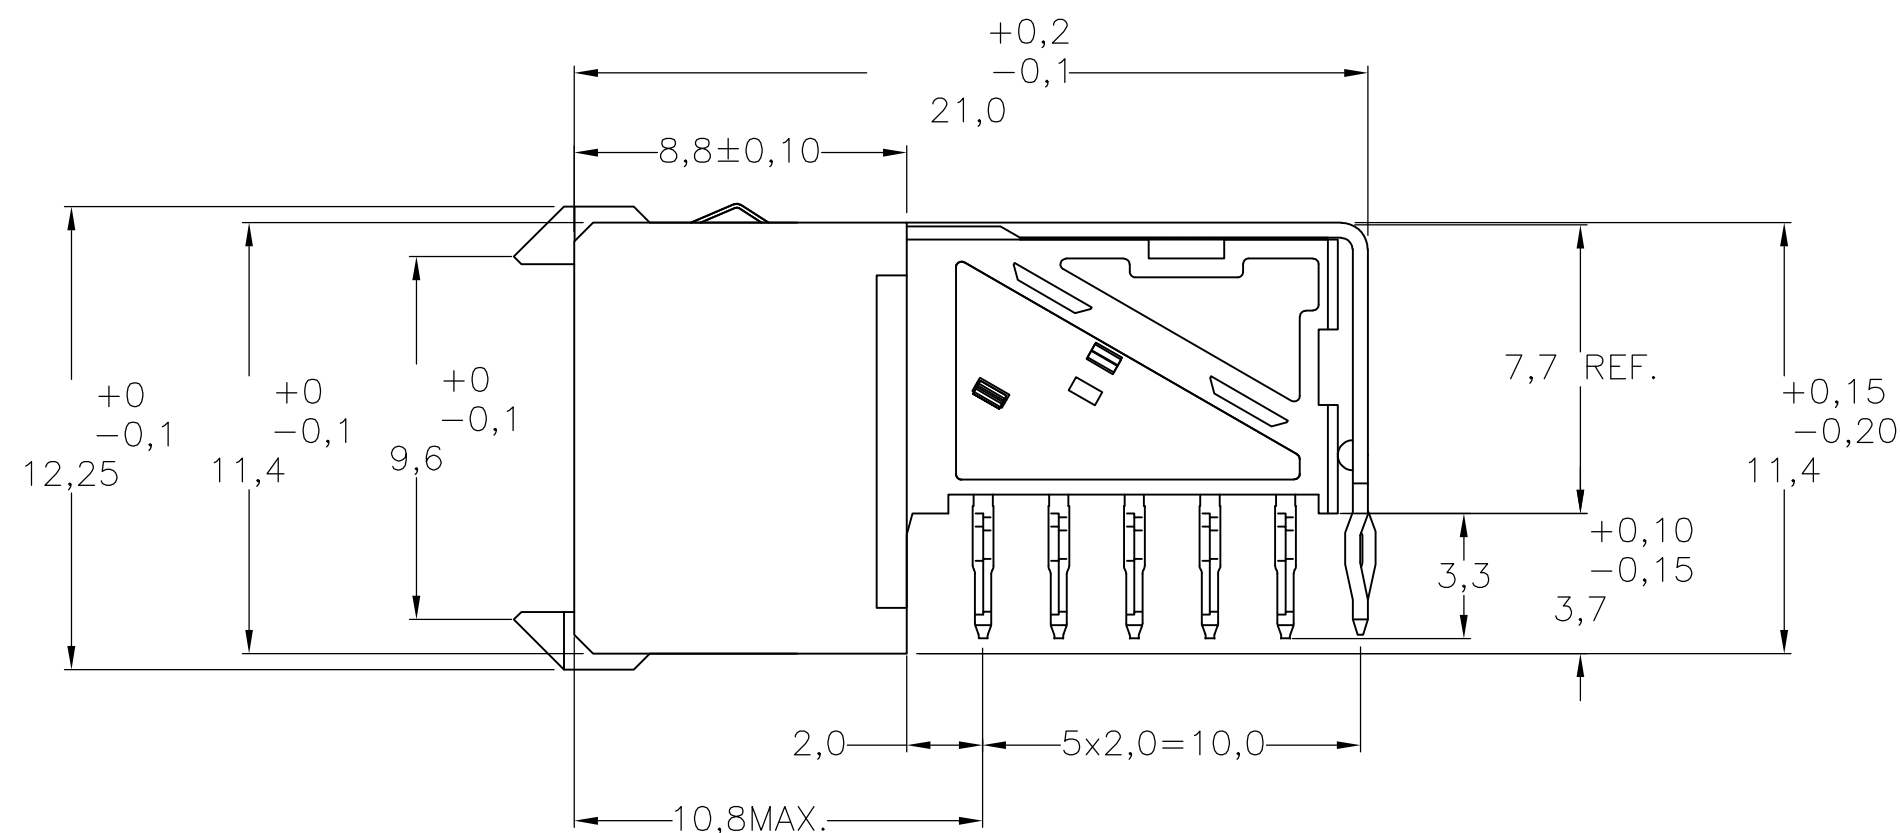

The diagram shows a 10x5 grid of holes on a PCB. The grid is defined by dimensions and tolerances:

- Grid Dimensions:**
 - Horizontal spacing: $5x$ (between columns) and $10x$ (total width, 20.0).
 - Vertical spacing: $4x$ (between rows) and 2.0 (total height, 8.0).
- Hole Dimensions:**
 - Top hole: $\varnothing 0.05$ (ALL HOLES).
 - Other holes: $\varnothing 1.0$ (top row) and $\varnothing 0.9$ (other rows).
- Positional Tolerances:**
 - Top hole: 2.0 (positional tolerance).
 - Other holes: 2.0 (positional tolerance).
- Other Dimensions:**
 - Distance from left edge to first column: 1.1 .
 - Distance from right edge to last column: 1.5 .
 - Distance from bottom edge to first row: 1.1 .
 - Distance from top edge to last row: 1.5 .

THIS DRAWING IS A CONTROLLED DOCUMENT.		DWN D. TRUREN		20JAN97		 TE Connectivity	
DIMENSIONS: mm		CHK —		—			
TOLERANCES UNLESS OTHERWISE SPECIFIED:		APVD —		NAME		Z-PACK 2mm HM	
		PRODUCT SPEC 108-19082		TYPE C - 11 COLUMNS PRE-SHIELDED RECEPTACLE			
		APPLICATION SPEC 114-19029					
MATERIAL —		FINISH —		SIZE A2		CAGE CODE 00779	
		WEIGHT 0.000000		DRAWING NO C-352115		RESTRICTED TO —	
CUSTOMER DRAWING				SCALE NTS		SHEET 1 of 1	
				REV M			

Mouser Electronics

Authorized Distributor

Click to View Pricing, Inventory, Delivery & Lifecycle Information:

[TE Connectivity:](#)

[3-352115-0](#)