


TL3901 SERIES TACT SWITCH


ANTI-VANDAL SWITCHES
DETECTOR SWITCHES
DIP SWITCHES
KEYLOCK SWITCHES
NAVIGATION SWITCHES
PUSHBUTTON SWITCHES
ROCKER SWITCHES
ROTARY SWITCHES
SLIDE SWITCHES
SNAP ACTION SWITCHES
TACTILE SWITCHES
TOGGLE SWITCHES
CAP OPTIONS



APPLICATIONS / MARKETS




Audio / Visual



Computer Peripherals




Consumer Electronics



Instrumentation



Telecommunication



Medical Equipment

RoHS

SPECIFICATIONS

Electrical Rating: 50mA @ 12VDC
Life Expectancy: 50,000 Cycles
Contact Resistance: 500mΩ Max.
Insulation Resistance: 100 MΩ Min. at 500VDC
Dielectric Strength: 250VAC for 1 min.
Operating Temperature: -40°C to 85°C
Storage Temperature: -40°C to 85°C
Operating Force: 180 +80/-40 gf
Travel: 0.3mm +/- 0.15mm
Contact Arrangement: SPST, Normally Open

FEATURES & BENEFITS

- Right angle SMT
- Tape & Reel packaging: 2,000 pieces per reel
- Unique design allows PC board edge mounting
- Subminiature package size

PART NUMBER CONFIGURATOR

Series	Model	Mounting	Termination	Contact Material	Operating Force
TL	3901	A - With Mounting Bosses	G - Gull Wing	Q - Silver	F180 - 180 gf

Specifications subject to change without notice



E-SWITCH®



www.e-switch.com

800.867.2717


2

TL3901 SERIES TACT SWITCH

BODY DIMENSIONS

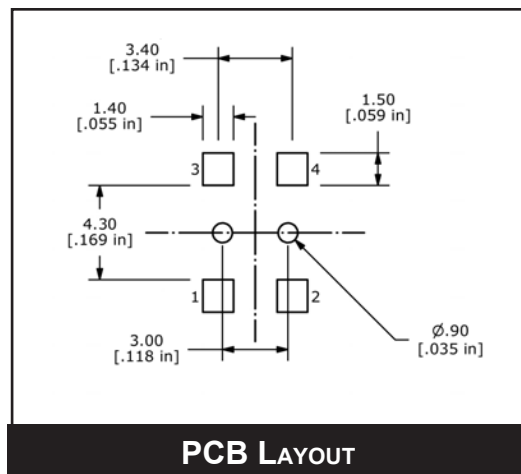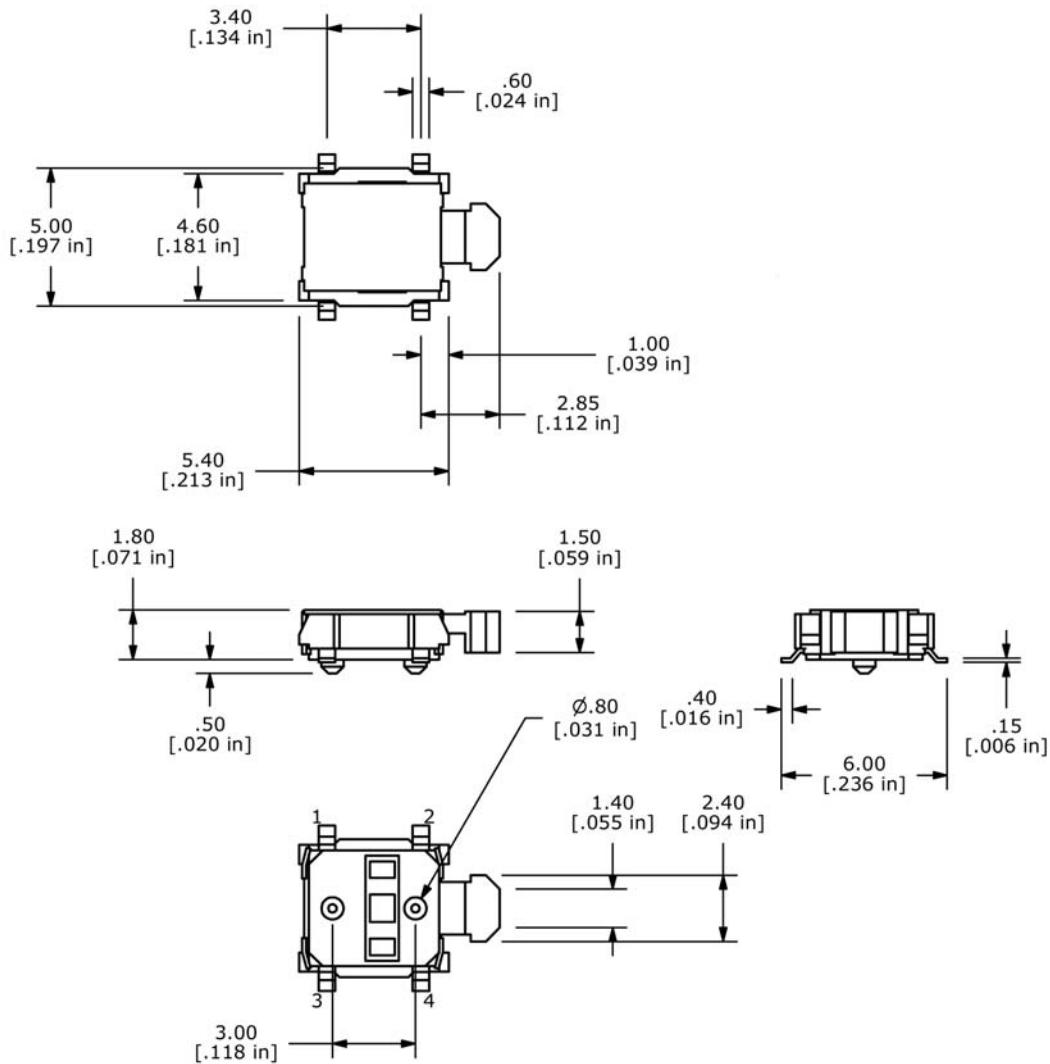

PCB LAYOUT

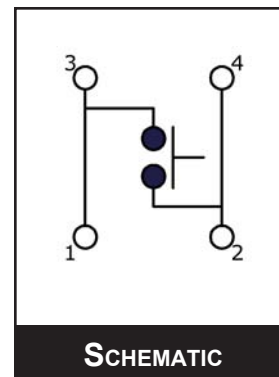

SCHEMATIC



E-SWITCH®

www.e-switch.com

800.867.2717

3

ANTI-VANDAL SWITCHES
DETECTOR SWITCHES
DIP SWITCHES
KEYLOCK SWITCHES
NAVIGATION SWITCHES
PUSHBUTTON SWITCHES
ROCKER SWITCHES
ROTARY SWITCHES
SLIDE SWITCHES
SNAP ACTION SWITCHES
TACTILE SWITCHES
TOGGLE SWITCHES
CAP OPTIONS

Mouser Electronics

Authorized Distributor

Click to View Pricing, Inventory, Delivery & Lifecycle Information:

[E-Switch:](#)

[TL3901AGQF180](#)