

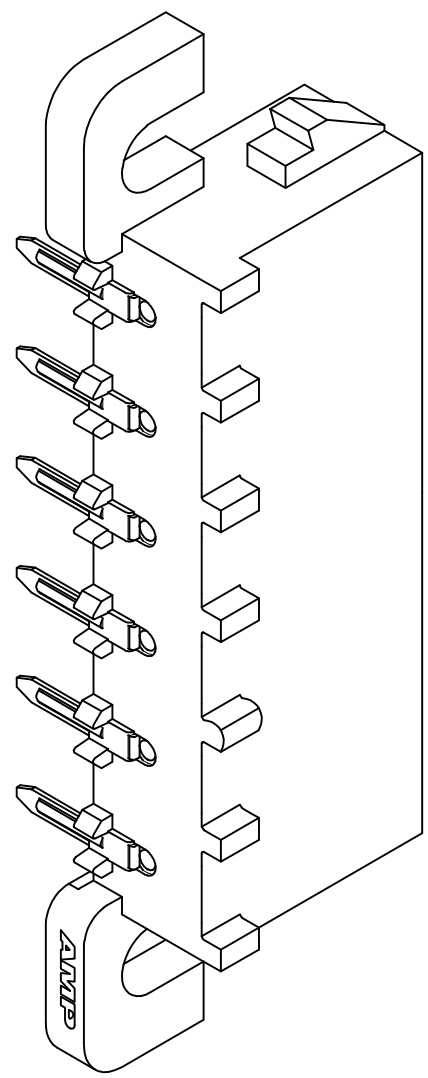
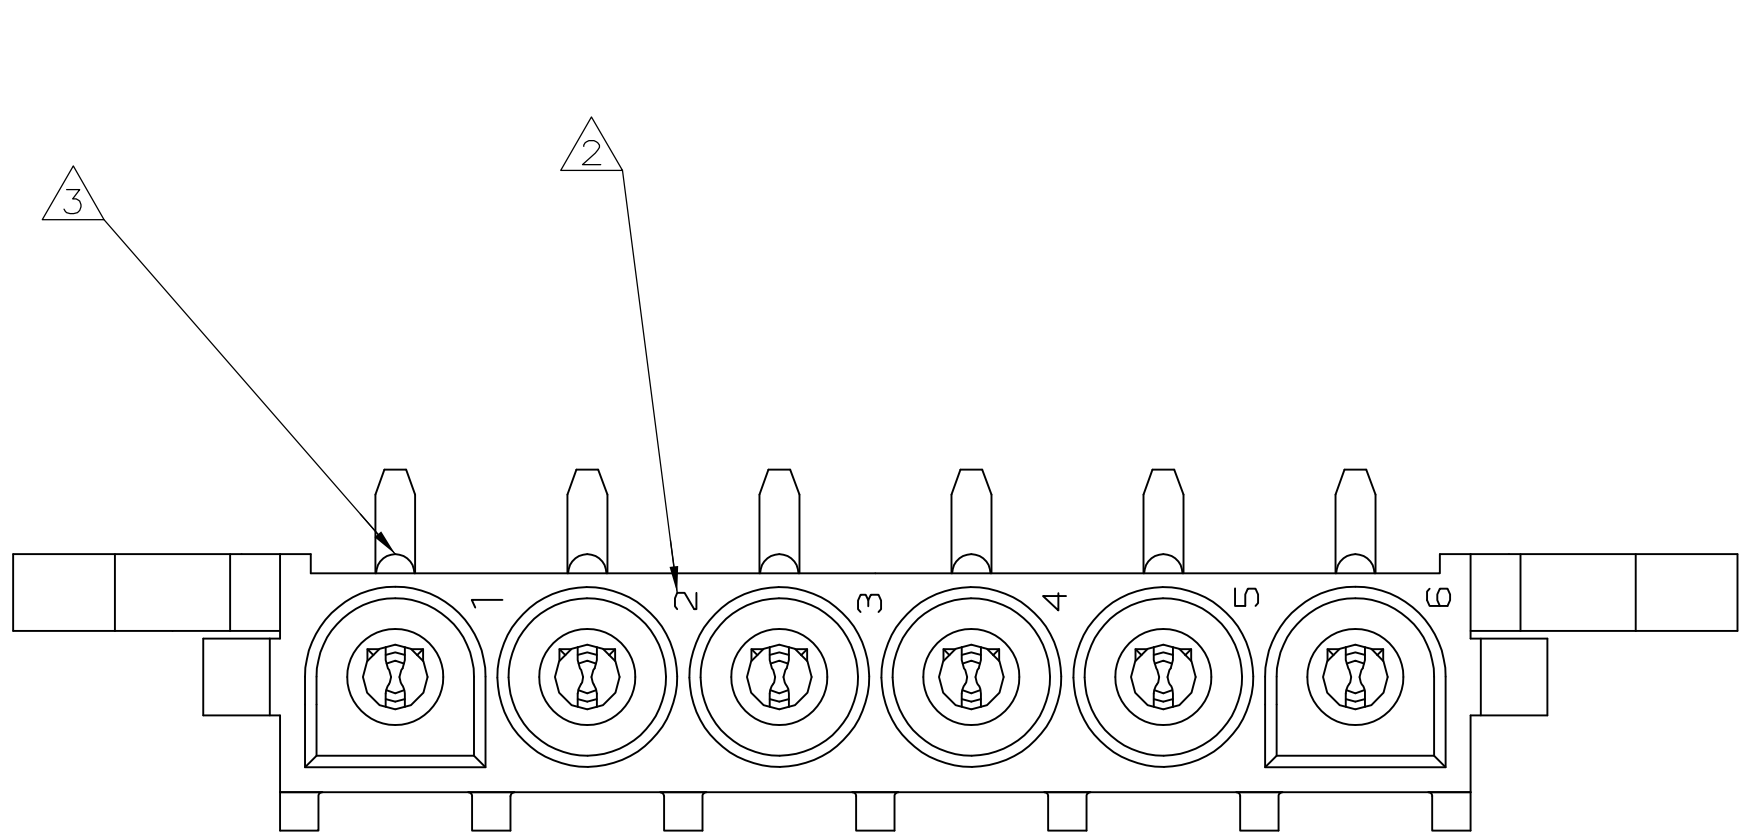
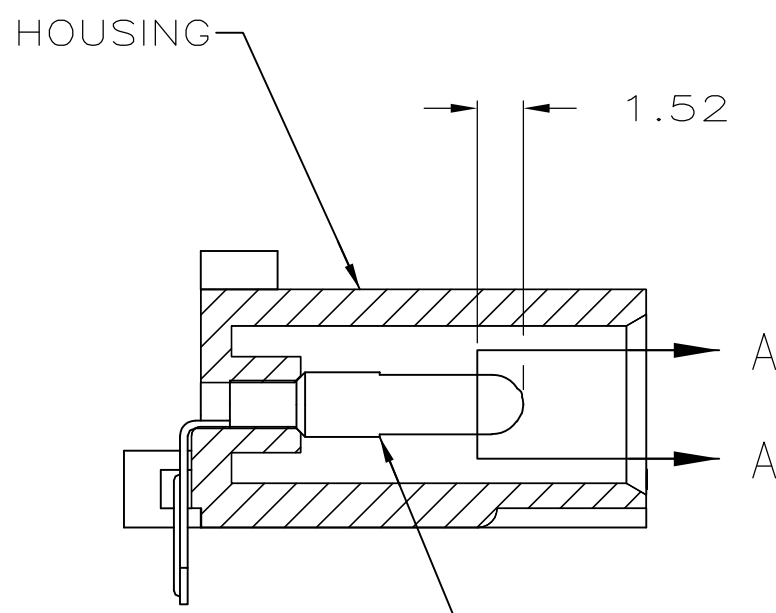



LOC		DIST		REVISIONS				
CM	00	P	LTR	DESCRIPTION		DATE	DWN	APVD
		B		REV PER ECR 10-018921		14SEPT10	JR	TM

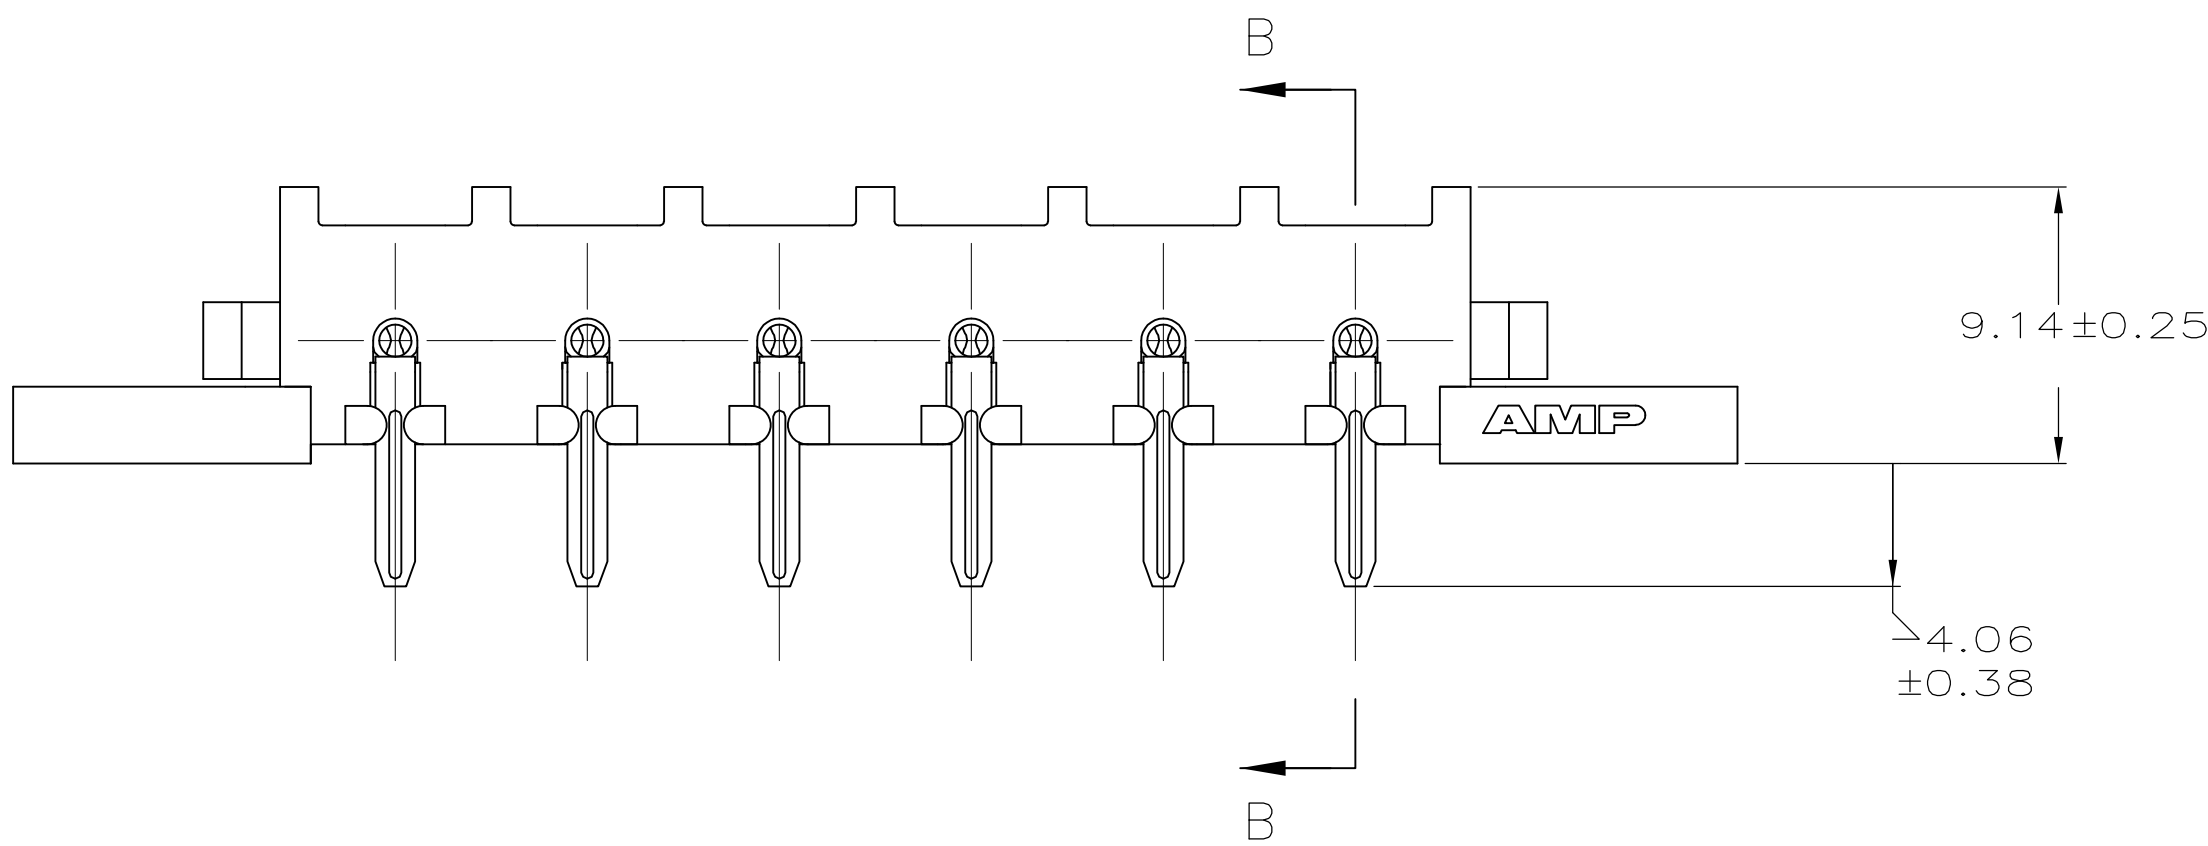

3-DIMENSIONAL MODEL
NTS

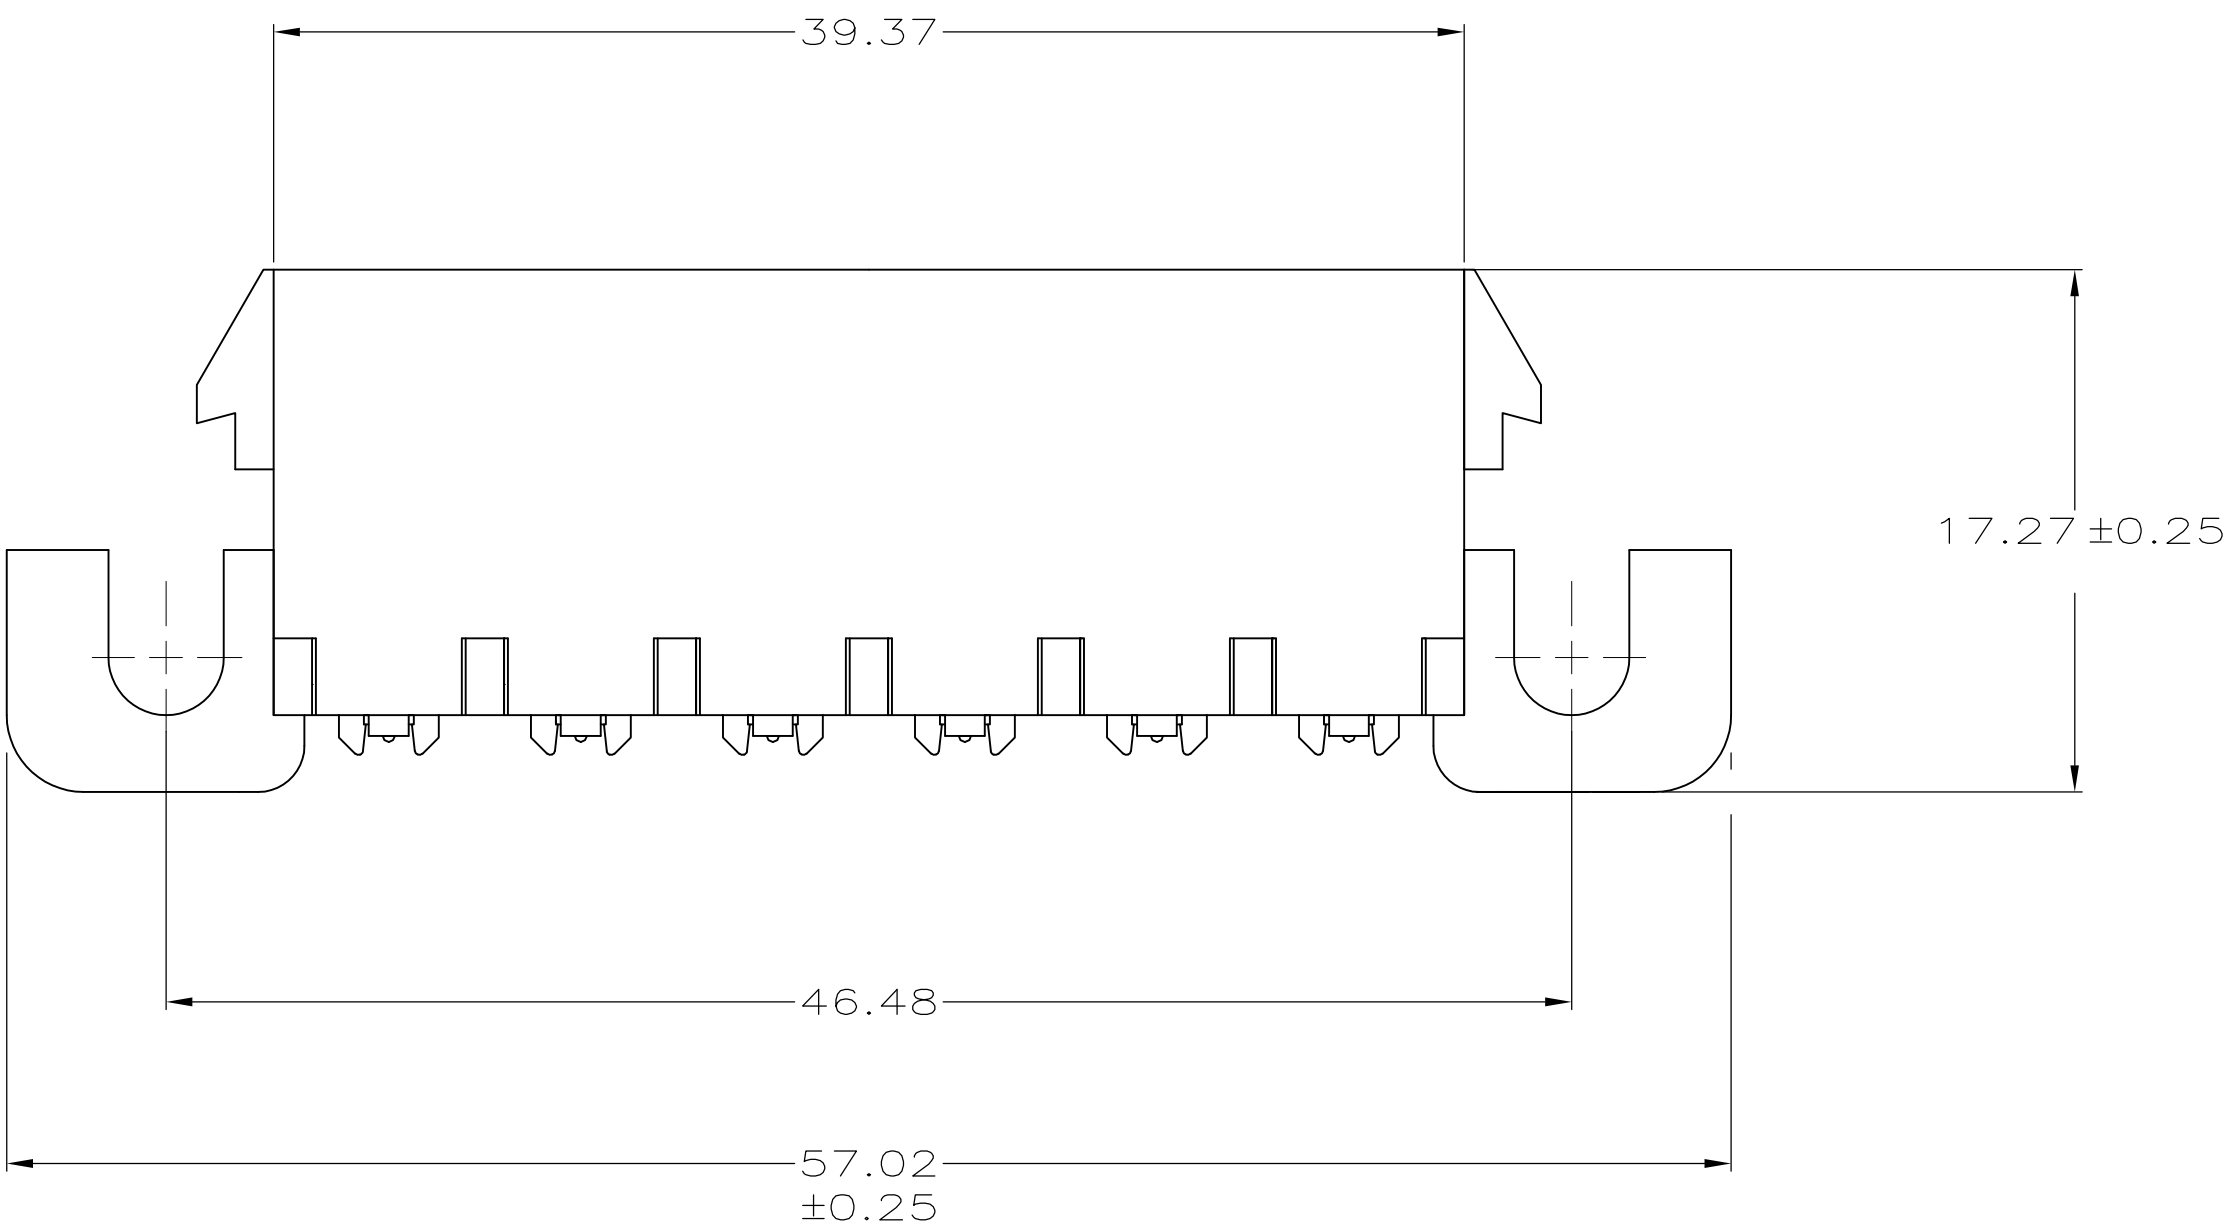


SECTION B-B

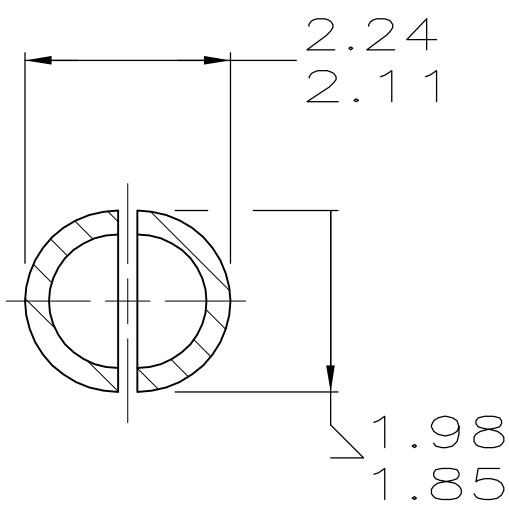

SECTION A-A
SCALE 10:1

1.98	.078	9.14	.360	-	-
1.85	.073	7.37	.290	57.02	2.245
1.57	.062	6.35	.250	46.48	1.830
1.52	.060	4.57	.180	39.37	1.550
0.38	.015	4.06	.160	31.75	1.250
0.25	.010	3.81	.150	25.40	1.000
0.13	.005	2.54	.100	19.05	.750
0.08	.003	2.29	.090	17.27	.680
0.00127	0.000050	2.24	.088	12.83	.505
0.00076	0.000030	2.11	.083	12.70	.500
MM	IN	MM	IN	MM	IN
CONVERSION TABLE					

- PARTS COMPLY WITH AMP SOLDERABILITY SPECIFICATION 109-11-5.
- CIRCUIT IDENTIFICATION CHARACTERS ARE ADJACENT TO THE INDICATED CAVITIES,BUT LOCATION AND ORIENTATION MAY DIFFER FROM PRINT.
- OPTIONAL CONSTRUCTION MAY DELETE THIS RIB.
- FLAMMABILITY V2 FOR THICKNESS 0.38mm, 1.5mm, qnd 3.0mm PER IEC 60695-11-10.
- GLOW-WIRE FLAMMABILITY (GWFI) 800°C FOR THICKNESS 0.38mm AND 0.75mm PER IEC 60695-2-12.
- GLOW-WIRE FLAMMABILITY (GWFI) 960°C FOR THICKNESS 1.5mm AND 3.0mm PER IEC 60695-2-12.
- GLOW-WIRE IGNITION (GWIT) 825°C FOR THICKNESS 0.38mm, 0.75mm, 1.5mm AND 3.0mm PER IEC 60695-2-13.

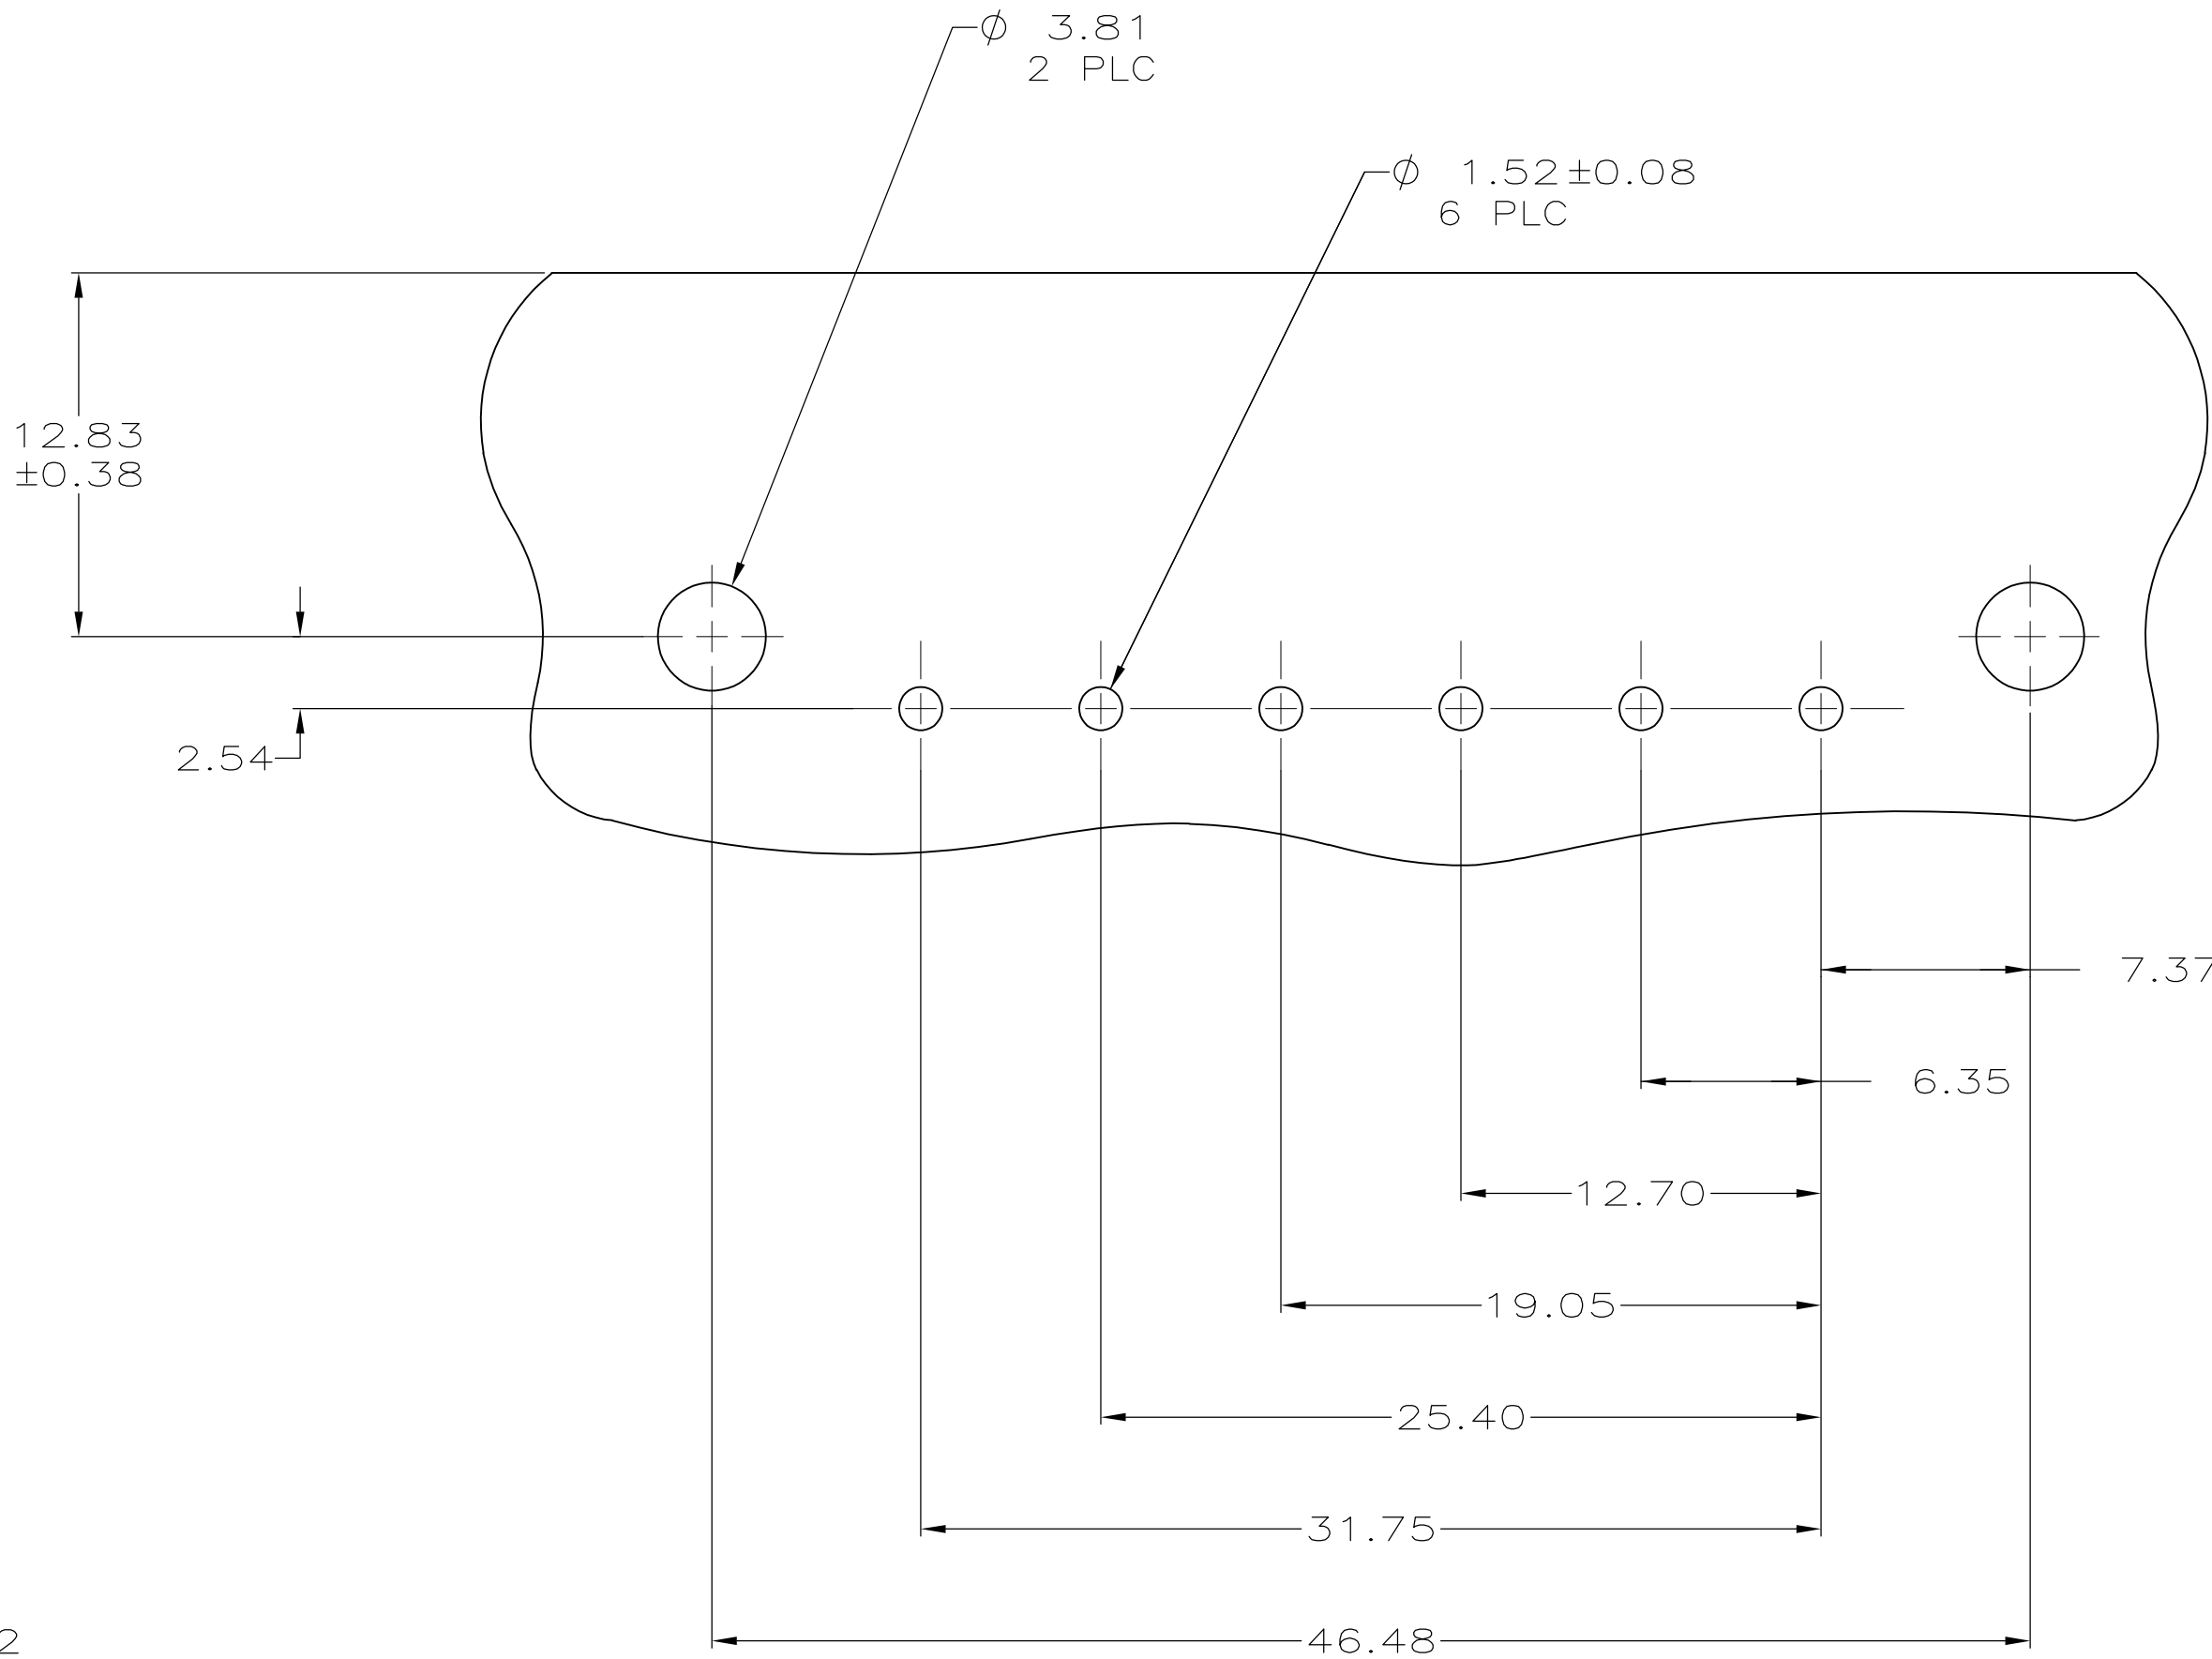

RECOMMENDED MOUNTING HOLE PATTERN
FOR 1.57 THICK P.C. BOARD

METRIC

THIS DRAWING IS A CONTROLLED DOCUMENT.		DWN K. WHITAKER 14MAR2008	Tyco Electronics Corporation Greensboro, NC 27409	
DIMENSIONS: mm		CHK D. COLEY 14MAR2008	Tyco Electronics	
TOLERANCES UNLESS OTHERWISE SPECIFIED:		APVD D. COLEY 14MAR2008	NAME	
		PRODUCT SPEC		PIN HEADER ASSEMBLY, RIGHT ANGLE MOUNT,6 POSITION, UNIVERSAL MATE-N-LOK(TM)
0 PLC ± -		APPLICATION SPEC		
1 PLC ± -		WEIGHT		RESTRICTED TO
2 PLC ± 0.13		A1 00779		
3 PLC ± -		C=1586936		REV
4 PLC ± -		CUSTOMER DRAWING		
ANGLES		SCALE 4:1		SHEET
FINISH		1 OF 1		
SEE TABLE				REV

Mouser Electronics

Authorized Distributor

Click to View Pricing, Inventory, Delivery & Lifecycle Information:

[TE Connectivity:](#)

[1586936-1](#)