



90W Open Frame LED Driver PSM090-240P Constant Voltage LED Power Supply



Features

- Low Profile Design
- OVP, OCP, OTP and Short-Circuit Protection
- Power Factor Correction
- UL 8750 Compliant
- Constant Voltage
- 100 to 277V Input Range
- High Efficiency
- 3 Years Warranty

Applications

- Indoor Lighting

Safety Approvals

- cUL/UL

Mechanical Characteristics

- Length: 169mm (6.65in)
- Width: 61mm (2.4in)
- Height: 31mm (1.22in)
- Weight: 368g (13oz)

Output Specifications

Model	DC Output Voltage Range		Typical Output Voltage	Output Current		Max Power
	Min.	Max.		Min.	Max.	
PSM090-240P	22.8V	25.2	24V	0.2A	3.75A	90W

Phihong is not responsible for any error, and reserves the right to make changes without notice. Please visit our website at www.phihong.com for the most up-to-date specifications and contact information.

INPUT:**AC Input Voltage Range**

90 to 304VAC

AC Input Voltage Rating

100 to 277VAC

Leakage Current

<1mA at 277VAC and maximum load

AC Input Frequency

47-63Hz

AC Inrush Current

40A at 115VAC and maximum load

80A at 277VAC and maximum load

OUTPUT:**Total Output Power**

90W

Efficiency

>85% at 115/277VAC and maximum load

Power Factor

>0.95 at 115VAC and maximum load

>0.90 at 230VAC and maximum load

Ripple

<240mVp-p at maximum load

Setup Time

4 seconds minimum at 100/277VAC and max load

Hold Up Time

8mS max. at 100/277VAC, 15mS max at 277VAC

ENVIRONMENTAL:

Operating Temperature -10 to 40°C

Storage Temperature -20 to 85°C

Operating Humidity 20 to 90%

Storage Humidity 10 to 95%

Warranty

5 Years

EMC

EN55015

Immunity

EN61000-4-2

EN61000-4-3

EN61000-4-4

EN61000-4-5

EN61000-4-6

EN61000-4-8

EN61000-4-11

EN61000-3-2

Isolation Test (HI-POT)

Primary to Secondary: 3000VAC, <10mA

Insulation Resistance

Primary to Secondary: 500VDC, >10 M ohm

FEATURES:**Input Current Protection**

The input power line will be fused with a 3A/350VAC fuse

Overload Protection

Auto-recover, Hiccup mode

Overvoltage Protection

Output should not exceed 35V, auto shut down

Over Temperature Protection

Automatic shut-down and latch off

MTBF

30K Hours minimum at max load and ambient 25°C

AC Input Connector (CN 1)

DINKLE: EK500V-03P

Mating: Solid or Stranded wire 18~24 AWG


DC Output Connector (CN2)

JST B6P – VH or equivalent

Pin # Assignment

1,2,3 -V

4,5,6 +V

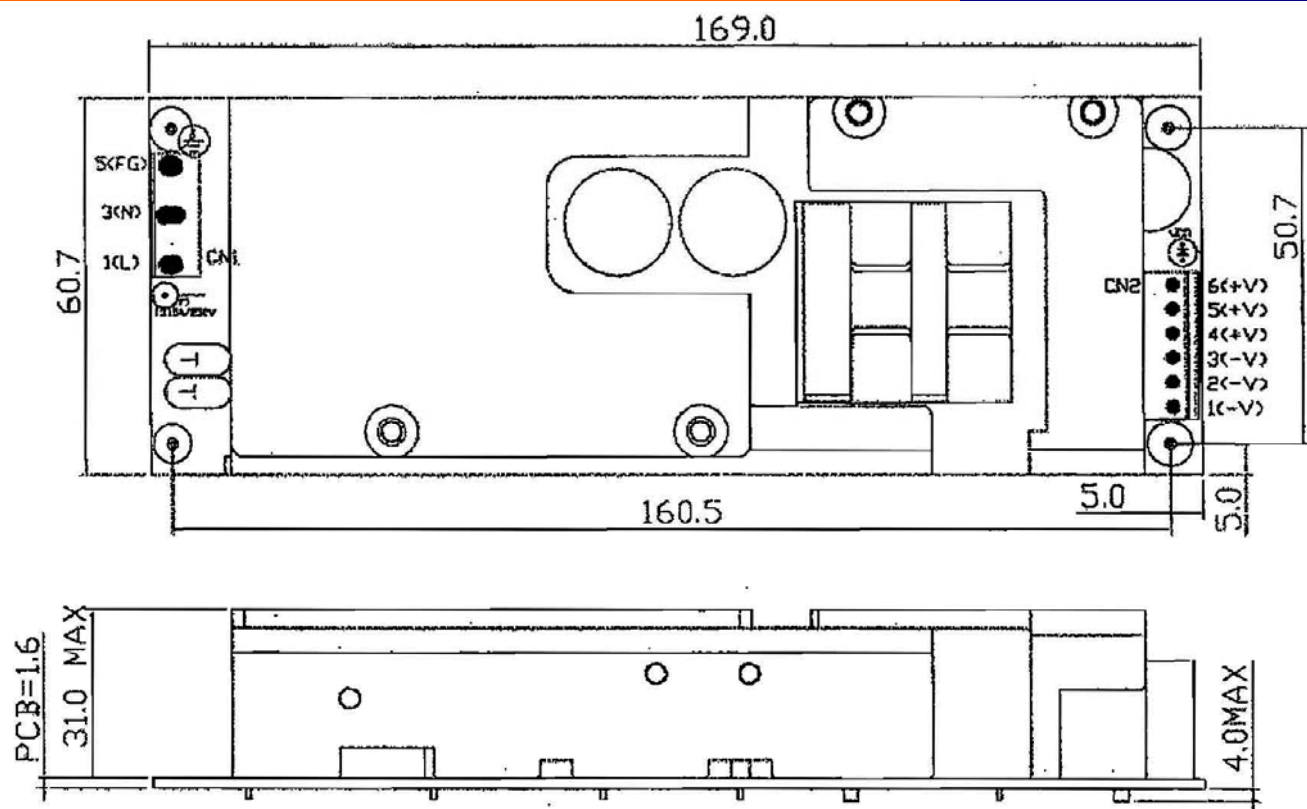

Mouser Electronics

Authorized Distributor

Click to View Pricing, Inventory, Delivery & Lifecycle Information:

[Phihong:](#)

[PSM090-240P-R](#)