


LOC —	DIST —	REVISIONS					
		P	LTR	DESCRIPTION	DATE	DWN	APVD
			C	CONTACT PIN MATERIAL AND PLATING CHANGE	22JUL2014	KJK	JK

NICHT VERMASSTE KANTEN SIND NICHT MAßSTÄBLICH

POS. PER ROW	L±0.4	PART NUMBER	
—	—	—	
2	5.08	828 221 -2	OBSOLETE
3	7.62	— -3	△
4	10.16	— -4	
5	12.70	— -5	OBSOLETE
6	15.24	— -6	OBSOLETE
7	17.78	— -7	
8	20.32	— -8	OBSOLETE △
9	22.86	— -9	OBSOLETE
10	25.40	1- -0	OBSOLETE
11	27.94	1- -1	
12	30.48	1- -2	OBSOLETE
13	33.02	1- -3	△
14	35.56	1- -4	OBSOLETE
15	38.10	1- -5	△
16	40.64	1- -6	△
17	43.18	1- -7	OBSOLETE
18	45.72	1- -8	△
19	48.26	1- -9	
20	50.80	2- -0	
21	53.34	2- -1	△
22	55.88	2- -2	△
23	58.42	2- -3	△
24	60.96	2- -4	△
25	63.50	2- -5	
26	66.04	2- -6	
27	68.58	2- -7	
28	71.12	2- -8	
29	73.66	2- -9	
30	76.20	3- -0	
31	78.74	3- -1	
32	81.28	3- -2	
33	83.82	3- -3	
34	86.36	3- -4	
35	88.90	3- -5	
36	91.44	3- -6	
37	93.98	3- -7	
38	96.52	3- -8	
39	99.06	3- -9	
40	101.60	4- -0	
41	104.14	4- -1	
42	106.68	4- -2	
43	109.22	4- -3	
44	111.76	4- -4	
45	114.30	4- -5	
46	116.84	4- -6	
47	119.38	4- -7	
48	121.92	4- -8	
49	124.46	4- -9	
50	127.00	5- 828 221 -0	OBSOLETE △

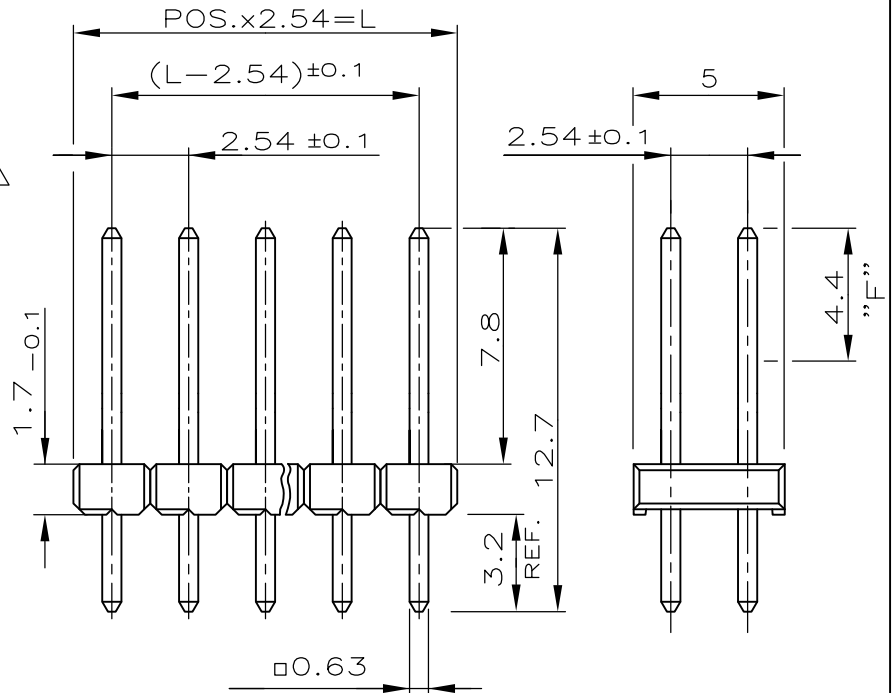

1 MATING SIDE: MIN. 0.7µm PdNi + MIN. 0.1µm GOLD FLASH BY AREA "F" OVER 1.27µm NICKEL
SOLDER SIDE : MIN. 2.5µm TIN OVER 1.27µm NICKEL

2 OBSOLETE PARTS: OBSOLETE CIS STREAMLINING PER D.RENAUD/D.SINISI

CONTACT PIN	CuZn	△
PIN HOUSING	PBT	GREEN
DESCRIPTION	MATERIAL	COLOR FINISH

DIMENSIONS: mm		DWN R.NEBE 20.02.85	MATERIAL SEE TABLE		FINISH SEE TABLE	
TOLERANCES UNLESS OTHERWISE SPECIFIED: ±0.2 mm		CHK M.SCHAARSCHMIDT 22.02.85				
APVD —		PRODUCT SPEC 108-18012				
PRODUCT SPEC 108-18012		NAME AMPMODU II PIN HEADER, DUAL ROW				
APVD —		APPLICATION SPEC —	SIZE A4	CAGE CODE 00779	DRAWING NO C-828221	RESTRICTED TO —
WEIGHT —		CUSTOMER DRAWING				
0 PLC ± — 1 PLC ± — 2 PLC ± — 3 PLC ± — 4 PLC ± — ANGLES ± —		SCALE 4:1 SHEET 1 OF 1 REV C				

Mouser Electronics

Authorized Distributor

Click to View Pricing, Inventory, Delivery & Lifecycle Information:

[TE Connectivity:](#)

[1-828221-1](#)