



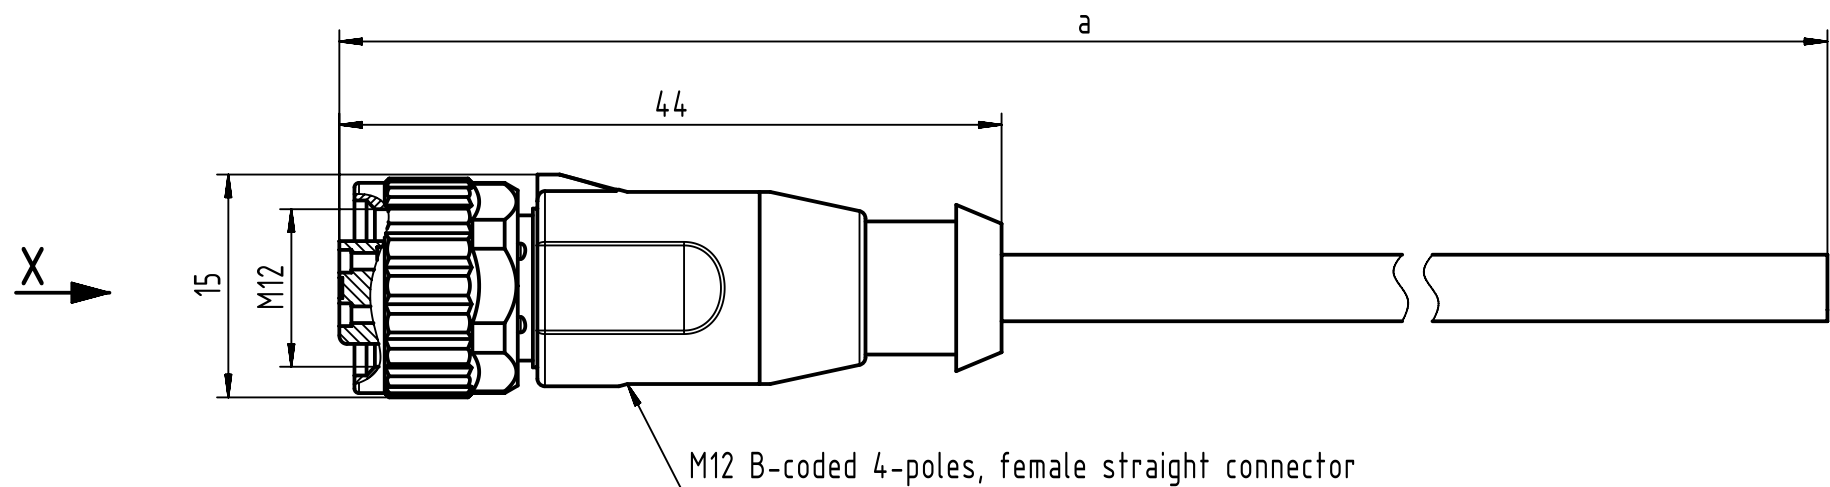


M12 B-coded 4-poles, female straight connector

Loading-Plan:

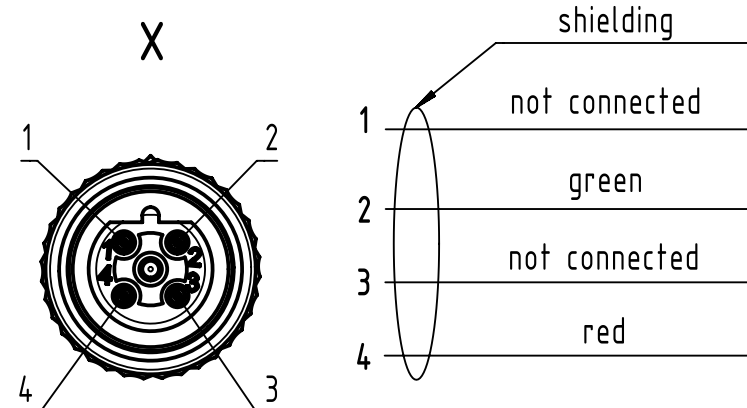

- Protection level: IP67
- Temperature range: -30°C ... +60°C

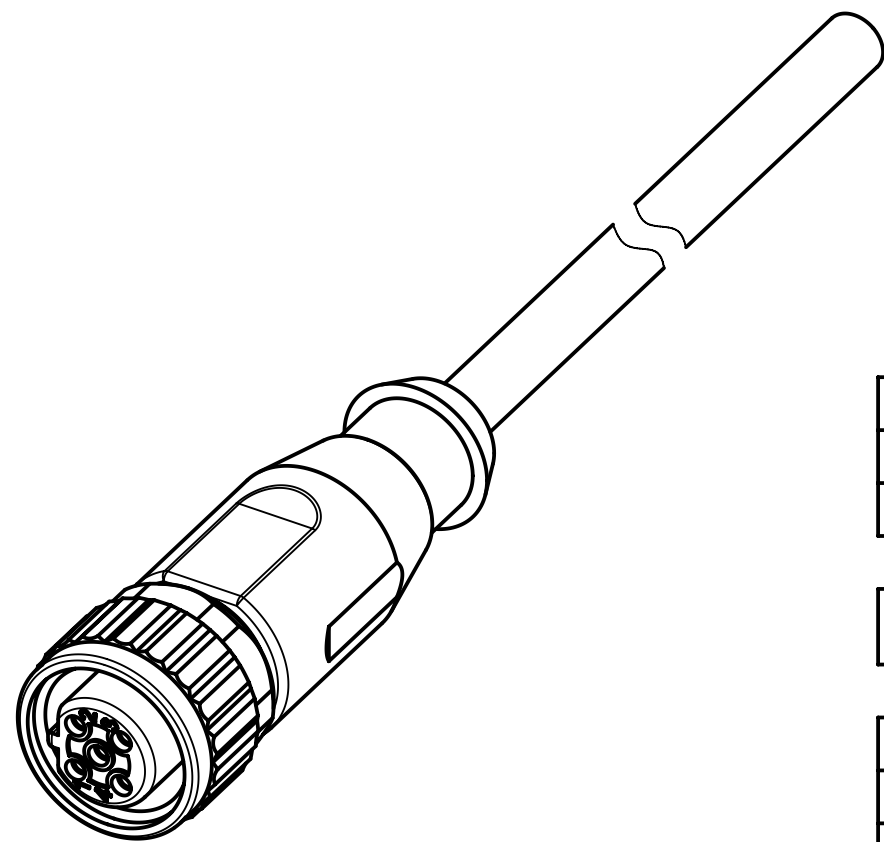

length in "1m" step	40	XXX=400
	39	XXX=390
	.	.
	12	XXX=120
	11	XXX=110
length in "0.1m" step	10	XXX=100
	9.9	XXX=099
	9.8	XXX=098
	.	.
	0.4	XXX=004
	0.3	XXX=003
	0.2	XXX=002
	0.1	XXX=001
Step	a [m]	XXX

4.0 to 40	+1%
0.1 to 3.9	+0.04
a [m]	Tolerance

Part no.	213489004XXXXX
----------	----------------

Type of cable	XX
PVC violet, 2xAWG22	XX=86
TPE violet, 2xAWG24	XX=87

	All Dimensions in mm Original Size DIN A3	Scale 2:1		Free size tol.		Ref.		
						Sub.		
	All rights reserved	Created by TOMUTA	Inspected by AVRAM	Standardisation KOHLER	Date 2014-07-16		State Final Release	
	Department EC PD - RO	Title M12 B-coded Cable Assembly					Doc-Key / ECM-Nr. 100579386/UGD/009/A 500000077557	
HARTING Electronics GmbH D-32339 Espelkamp		Type TB	Number 213489004XXXXX				Rev. A	Page 1/1

Mouser Electronics

Authorized Distributor

Click to View Pricing, Inventory, Delivery & Lifecycle Information:

HARTING:

[21348900486050](#) [21348900486010](#) [21348900487010](#)