

## NOTES:


В

4805 (3/11)

POINT OF MEASUREMENT FOR PLATING THICKNESS

2 .000015 Gold on the contact area, gold flash on solder area, all over .000050 Nickel

 $\sqrt{3}$  obsolete parts: obsolete cis streamlining per d.renaud/d.sinisi

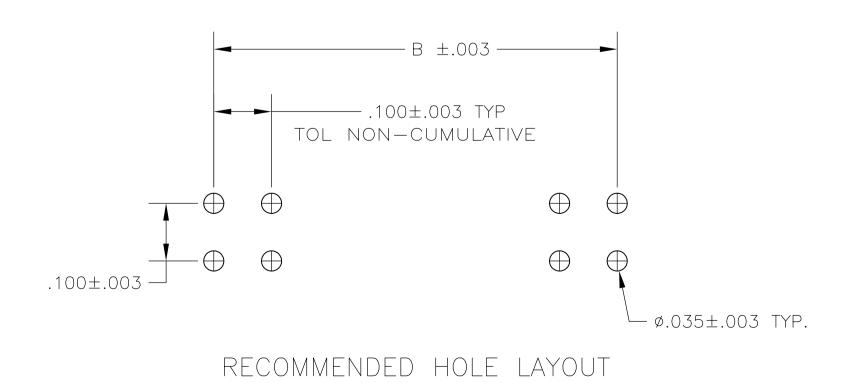

OBSOLETE 3 OBSOLETE 0BSOLETE	NONE	6TH	001						
		<u> </u>	.984	.900	9	19	20	4-872	230-3
OBSOLETE	2ND	NONE	.584	.500	5	11	12	4-	-2
	4TH		.484	.400	4	9	10	4-	— 1
	NONE		3.984	3.900	39	80	80	4-	-0
	4		3.884	3.800	38	78	78	3—	-9
			3.784	3.700	37	76	76	3-	-8
			3.684	3.600	36	74	74	3—	-7
			3.584	3.500	35	72	72	3—	-6
			3.484	3.400	34	70	70	3—	-5
			3.384	3.300	33	68	68	3-	-4
			3.284	3.200	32	66	66	3-	-3
			3.184	3.100	31	64	64	3—	-2
			3.084	3.000	30	62	62	3-	— 1
			2.984	2.900	29	60	60	3—	-0
			2.884	2.800	28	58	58	2-	-9
			2.784	2.700	27	56	56	2-	-8
			2.684	2.600	26	54	54	2-	-7
			2.584	2.500	25	52	52	2-	-6
			2.484	2.400	24	50	50	2-	-5
			2.384	2.300	23	48	48	2-	-4
			2.284	2.200	22	46	46	2-	-3
			2.184	2.100	21	44	44	2-	-2
			2.084	2.000	20	42	42	2-	
			1.984	1.900	19	40	40	2-	-0
			1.884	1.800	18	38	38	1-	-9
			1.784	1.700	17	36	36	1-	-8
			1.684	1.600	16	34	34	1 —	-7
			1.584	1.500	15	32	32	1 —	-6
			1.484	1.400	14	30	30	1 —	-5
			1.384	1.300	13	28	28	1 —	-4
_			1.284	1.200	12	26	26	1 —	-3
			1.184	1.100	11	24	24	1 —	-2
			1.084	1.000	10	22	22	1 —	
			.984	.900	9	20	20	1 —	-0
			.884	.800	8	18	18		-9
			.784	.700	7	16	16		-8
			.684	.600	6	14	14		-7
			.584	.500	5	12	12		-6
_			.484	.400	4	10	10		-5
			.384	.300	3	8	8		-4
			.284	.200	2	6	6		-3
	<b>V</b>	V I	.184	.100	1	4	4		-2
	NONE	NONE	.084			2	2	87	230-1
	ROW	ROW				NO OF			
	N	M		B	A	ACT	OF		RT
	POSTS O	MITTED	$\bigcirc$			POS	POS	NUM	
TI	THIS DRAWING IS A CONTROLLED DOCUMENT.		CHK	5-15-85					
	DIMENSIONS: TOLERANCES UNLESS OTHERWISE SPECIFIED		T. ZOLA						
	INCHES	$0 \text{ PLC} \pm -$	T. ZOLA PRODUCT SPEC			ASSEMBLY,			
		$1 PLC \pm -$ $1 2 PLC \pm -$	_			OUBLE ROW - 025 SO	,		Y I NARER
	$\Psi$	2 PLC ± .005 4 PLC ± - ANGLES ± - FINISH ∧	APPLICATION SPEC 			LE, .025 SQ POSTS, SELECTIVELY LOADE[ e   drawing no   restricted			
	FERIAL				A 1 00779 <b>C</b> -87230 -				
HOU The	USING: FLAME RETARDANT ERMOPLASTIC, COLOR:BLACI	< 2			/ /     00 / / 0	SCA SCA	LE S	HEET OF	REV
I	STS: PHOS BRONZE		CUSTOMER	UKAWING		1-201	4:1	1	1 🖾 K3

## **Mouser Electronics**

Authorized Distributor

Click to View Pricing, Inventory, Delivery & Lifecycle Information:

TE Connectivity: <u>1-87230-2</u>