

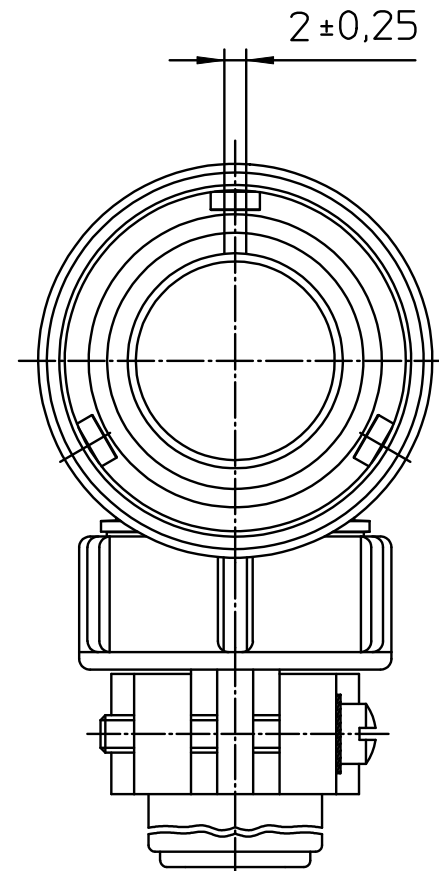


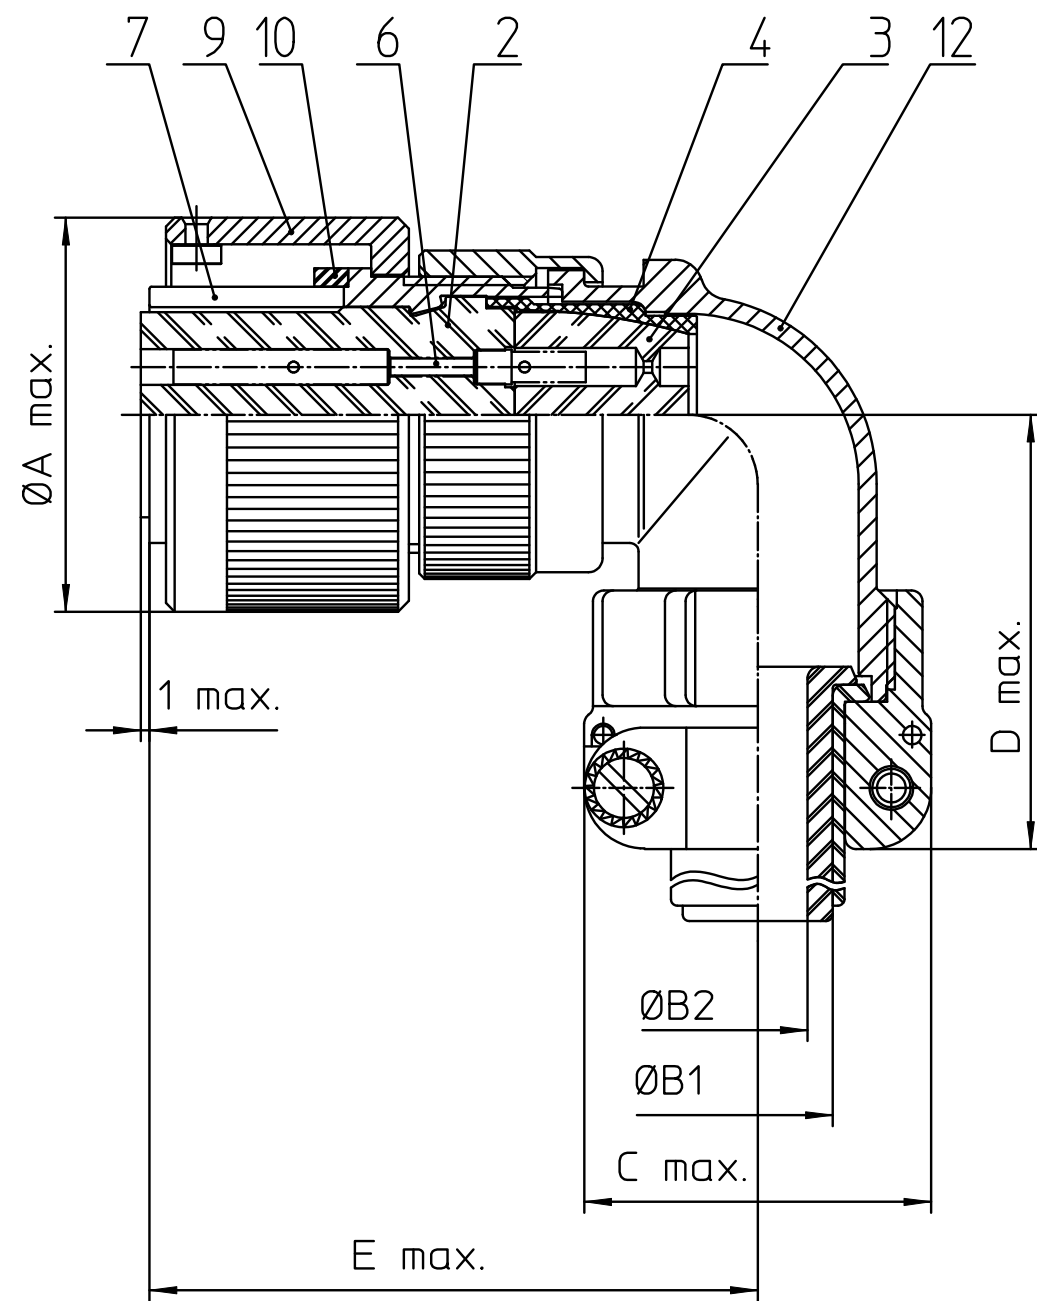

NO.	MASSE / DIMENSION
A	53.4
B1	21.5
B2	16.6
C	43.3
D	58
E	66

NO.	BESCHREIBUNG / DESCRIPTION
2	ISOLIERKÖRPER BUCHSE / INSULATOR SOCKET
3	DICHTKÖRPER / GROMMET
4	ENDRING / ENDRING
6	KONTAKTBUCHSE / CONTACT SOCKET
7	ZYLINDERGHÄUSE / BARREL
9	ÜBERWURFMUTTER / COUPLING NUT
10	DICHTRING FRONT / FRONT SEALING RING
12	ENDGEHÄUSE / ENDBELL

Note: Due to an automatic nomenclature system, numbers generated may not be sequential.
Specification and Dimensions subject to change
Drawings illustrate normal insulator positioning

Material Specification:
Shell Material: Aluminium alloy
Shell Plating: Olive drab chromate over cadmium (conductive)
Insulator Material: CR-Elastomere
Contact Material: Copper alloy
Contact Plating: Hard silver

all dimensions are in mm Dimensions without tolerance indications are general tolerances in acc. with DIN7168m	drawing for CUSTOMER
---	-------------------------

 ITT <i>Engineered for life</i> ITT CANNON GmbH D - 71384 Weinstadt/Germany	<table><tr><td>description</td><td>CA3108E28-21SWB-F80-F0</td></tr><tr><td>Plug, 90°</td><td></td></tr><tr><td>Endbell with clamp and bushing</td><td></td></tr><tr><td>AWG Crimp / Socket / Layout: 28-21</td><td></td></tr></table>	description	CA3108E28-21SWB-F80-F0	Plug, 90°		Endbell with clamp and bushing		AWG Crimp / Socket / Layout: 28-21	
description	CA3108E28-21SWB-F80-F0								
Plug, 90°									
Endbell with clamp and bushing									
AWG Crimp / Socket / Layout: 28-21									
© All rights reserved. Reproduction or issue to third in any form whatever is only permitted with written authorization of ITT Cannon	<table><tr><td>page</td><td>revision</td></tr><tr><td>1/1</td><td>1697 15. Apr 19</td></tr></table>	page	revision	1/1	1697 15. Apr 19				
page	revision								
1/1	1697 15. Apr 19								