


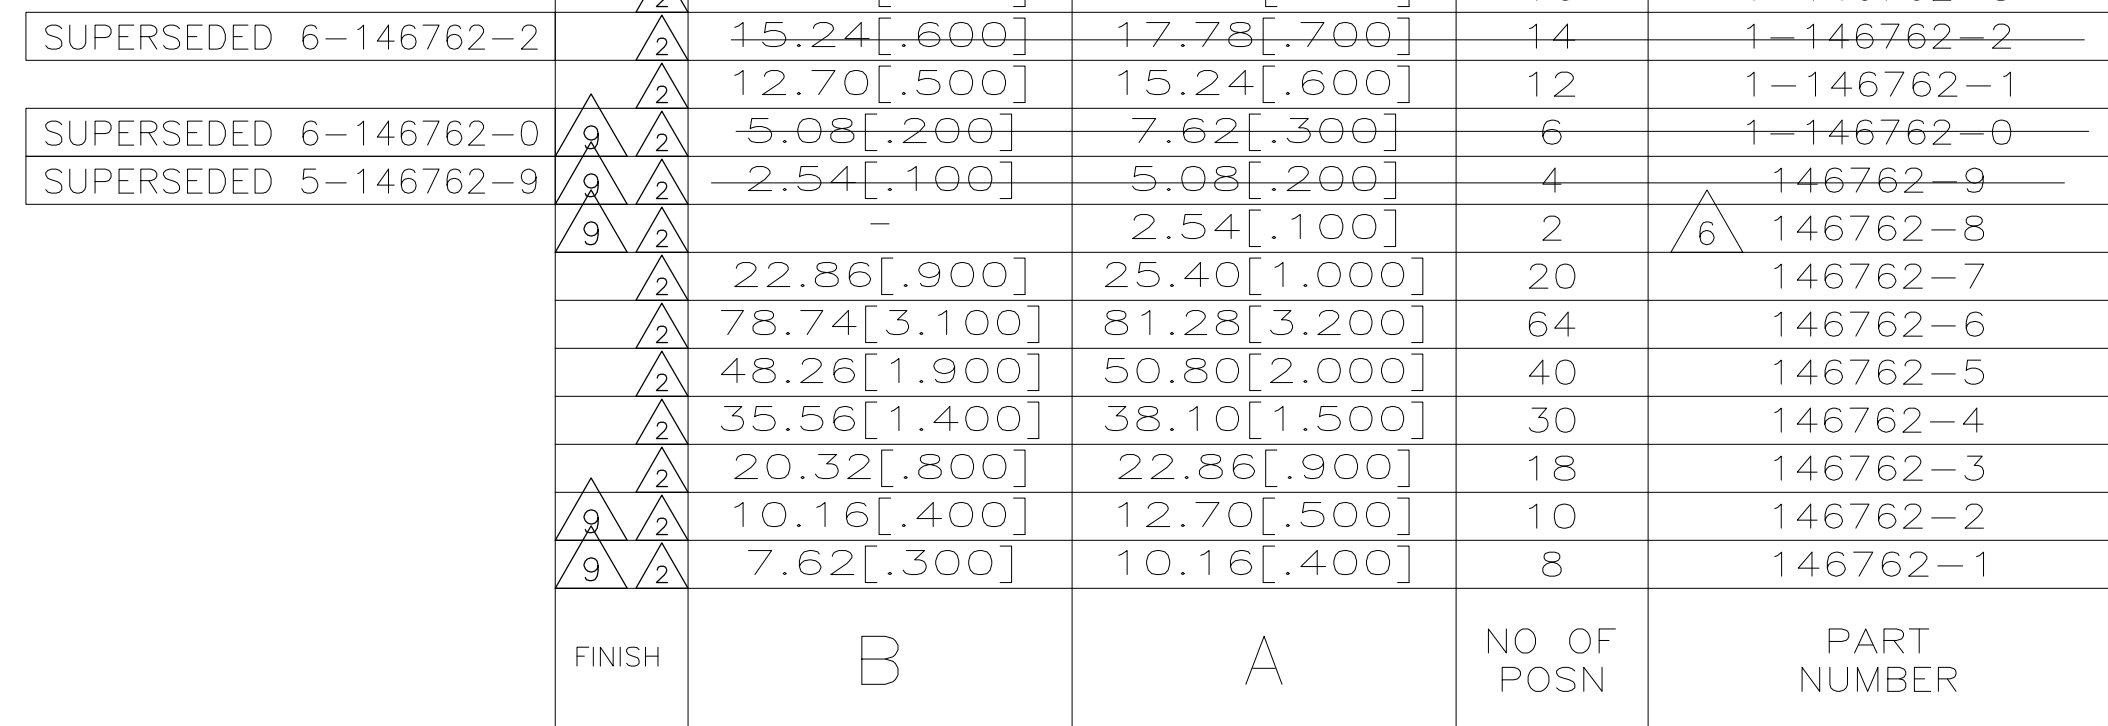

	$\triangle_2$	99.06[3.900]	101.60[4.000]	80	4-146762-0
	$\triangle_2$	96.52[3.800]	99.06[3.900]	78	3-146762-9
	$\triangle_2$	93.98[3.700]	96.52[3.800]	76	3-146762-8
	$\triangle_2$	91.44[3.600]	93.98[3.700]	74	3-146762-7
	$\triangle_2$	88.90[3.500]	91.44[3.600]	72	3-146762-6
	$\triangle_2$	86.36[3.400]	88.90[3.500]	70	3-146762-5
	$\triangle_2$	83.82[3.300]	86.36[3.400]	68	3-146762-4
	$\triangle_2$	81.28[3.200]	83.82[3.300]	66	3-146762-3
	$\triangle_2$	76.20[3.000]	78.74[3.100]	62	3-146762-2
	$\triangle_2$	73.66[2.900]	76.20[3.000]	60	3-146762-1
	$\triangle_2$	71.12[2.800]	73.66[2.900]	58	3-146762-0
	$\triangle_2$	68.58[2.700]	71.12[2.800]	56	2-146762-9
	$\triangle_2$	66.04[2.600]	68.58[2.700]	54	2-146762-8
	$\triangle_2$	63.50[2.500]	66.04[2.600]	52	2-146762-7
	$\triangle_2$	60.96[2.400]	63.50[2.500]	50	2-146762-6
	$\triangle_2$	58.42[2.300]	60.96[2.400]	48	2-146762-5
	$\triangle_2$	55.88[2.200]	58.42[2.300]	46	2-146762-4
	$\triangle_2$	53.34[2.100]	55.88[2.200]	44	2-146762-3
	$\triangle_2$	50.80[2.000]	53.34[2.100]	42	2-146762-2
	$\triangle_2$	45.72[1.800]	48.26[1.900]	38	2-146762-1
	$\triangle_2$	43.18[1.700]	45.72[1.800]	36	2-146762-0
	$\triangle_2$	40.64[1.600]	43.18[1.700]	34	1-146762-9
	$\triangle_2$	38.10[1.500]	40.64[1.600]	32	1-146762-8
	$\triangle_2$	33.02[1.300]	35.56[1.400]	28	1-146762-7
	$\triangle_2$	30.48[1.200]	33.02[1.300]	26	1-146762-6
	$\triangle_2$	27.94[1.100]	30.48[1.200]	24	1-146762-5
	$\triangle_2$	25.40[1.000]	27.94[1.100]	22	1-146762-4
	$\triangle_2$	17.78[.700]	20.32[.800]	16	1-146762-3
2	$\triangle_2$	15.24[.600]	17.78[.700]	14	1-146762-2
	$\triangle_2$	12.70[.500]	15.24[.600]	12	1-146762-1
0	$\triangle_2$	-5.08[.200]	7.62[.300]	6	1-146762-0
9	$\triangle_2$	-2.54[.100]	5.08[.200]	4	146762-9
	$\triangle_9$	-	2.54[.100]	2	$\triangle_6$ 146762-8
	$\triangle_2$	22.86[.900]	25.40[1.000]	20	146762-7
	$\triangle_2$	78.74[3.100]	81.28[3.200]	64	146762-6
	$\triangle_2$	48.26[1.900]	50.80[2.000]	40	146762-5
	$\triangle_2$	35.56[1.400]	38.10[1.500]	30	146762-4
	$\triangle_2$	20.32[.800]	22.86[.900]	18	146762-3
	$\triangle_9$	10.16[.400]	12.70[.500]	10	146762-2
	$\triangle_9$	7.62[.300]	10.16[.400]	8	146762-1


THIS DRAWING IS A CONTROLLED DOCUMENT.		DWN M.BINNER 06NOV2002 CHK 06NOV02 J.OLSON APVD 06NOV02 J.OLSON PRODUCT SPEC 108-25022 APPLICATION SPEC 114-25018 WEIGHT -		 TE Connectivity RECEPTACLE ASSEMBLY, MOD IV, DOUBLE ROW, TOP ENTRY, .100X.100CL, VERTICAL MOUNT, AMPMODU		NAME	
DIMENSIONS: mm [INCHES] 		TOLERANCES, UNLESS OTHERWISE SPECIFIED: 0 PLC ± - 1 PLC ± - 2 PLC ± 0.13[.005] 3 PLC ± - 4 PLC ± - ANGLES ± -		SIZE A2		CAGE CODE 00779	
MATERIAL 		FINISH  		DRAWING NO C-146762		RESTRICTED TO -	
CUSTOMER DRAWING				SCALE 4:1		SHEET 1 of 2	
				REV 15			

THIS DRAWING IS UNPUBLISHED.	RELEASED FOR PUBLICATION	- , -
© COPYRIGHT - By - ALL RIGHTS RESERVED.		

LOC	DIST	REVISIONS					
AD	00	P	LTR	DESCRIPTION	DATE	OWN	APVD
			—	SEE SHEET I	—	—	—

	99.06[3.900]	101.60[4.000]	80		9-146762-0
	96.52[3.800]	99.06[3.900]	78		8-146762-9
	93.98[3.700]	96.52[3.800]	76		8-146762-8
	91.44[3.600]	93.98[3.700]	74		8-146762-7
	88.90[3.500]	91.44[3.600]	72		8-146762-6
	86.36[3.400]	88.90[3.500]	70		8-146762-5
	83.82[3.300]	86.36[3.400]	68		8-146762-4
	81.28[3.200]	83.82[3.300]	66		8-146762-3
	76.20[3.000]	78.74[3.100]	62		8-146762-2
	73.66[2.900]	76.20[3.000]	60		8-146762-1
	71.12[2.800]	73.66[2.900]	58		8-146762-0
	68.58[2.700]	71.12[2.800]	56		7-146762-9
	66.04[2.600]	68.58[2.700]	54		7-146762-8
	63.50[2.500]	66.04[2.600]	52		7-146762-7
	60.96[2.400]	63.50[2.500]	50		7-146762-6
	58.42[2.300]	60.96[2.400]	48		7-146762-5
	55.88[2.200]	58.42[2.300]	46		7-146762-4
	53.34[2.100]	55.88[2.200]	44		7-146762-3
	50.80[2.000]	53.34[2.100]	42		7-146762-2
	45.72[1.800]	48.26[1.900]	38		7-146762-1
	43.18[1.700]	45.72[1.800]	36		7-146762-0
	40.64[1.600]	43.18[1.700]	34		6-146762-9
	38.10[1.500]	40.64[1.600]	32		6-146762-8
	33.02[1.300]	35.56[1.400]	28		6-146762-7
	30.48[1.200]	33.02[1.300]	26		6-146762-6
	27.94[1.100]	30.48[1.200]	24		6-146762-5
	25.40[1.000]	27.94[1.100]	22		6-146762-4
	17.78[.700]	20.32[.800]	16		6-146762-3
	15.24[.600]	17.78[.700]	14		6-146762-2
	12.70[.500]	15.24[.600]	12		6-146762-1
	5.08[.200]	7.62[.300]	6		6-146762-0
	2.54[.100]	5.08[.200]	4		5-146762-9
		2.54[.100]	2		5-146762-8
	22.86[.900]	25.40[1.000]	20		5-146762-7
	78.74[3.100]	81.28[3.200]	64		5-146762-6
	48.26[1.900]	50.80[2.000]	40		5-146762-5

OBSOLETE

THIS DRAWING IS A CONTROLLED DOCUMENT.		DWN M.BINNER		06NOV2002		 TE Connectivity	
		CHK J. OLSON		06NOV02			
DIMENSIONS: mm [INCHES]		TOLERANCES UNLESS OTHERWISE SPECIFIED:		APVD J. OLSON		NAME	
		0 PLC ± -		PRODUCT SPEC		RECEPTACLE ASSEMBLY, MOD IV, DOUBLE ROW, TOP ENTRY, .100X.100CL, VERTICAL MOUNT, AMPMODU	
		1 PLC ± -		108-25022			
		2 PLC ± 0.13[.005]		APPLICATION SPEC			
		3 PLC ± -		114-25018		SIZE	
		4 PLC ± -		WEIGHT		CAGE CODE	
MATERIAL		FINISH		-		DRAWING NO	
		 		A2 00779		RESTRICTED TO	
				C-146762		-	
CUSTOMER DRAWING						SCALE 1:1	
						SHEET 2 of 2	
						REV J5	

Mouser Electronics

Authorized Distributor

Click to View Pricing, Inventory, Delivery & Lifecycle Information:

[TE Connectivity:](#)

[5-146762-1](#)