

CE PLAN ETANT UN EXTRAIT DU PLAN DE DEFINITION, POUR TOUT LITIGE ON FERA REFERENCE AU PLAN DE DEFINITION.

THIS DRAWING IS AN EXTRACT OF THE PART DRAWING, FOR ANY LITIGATION THE PART DETAIL DRAWING WILL BE THE ONLY REFERENCE.

NOTICE DE CONTROLE:  
AU PIED A COULISSE OU AU PROJECTEUR DE PROFIL, VERIFIER LES COTES INDIQUEES SUR LE DESSIN DU CLIP.

CONTROL SPECIFICATION:  
WITH A SLIDING CALIPER OR A PROFILE PROJECTOR, MEASURE THE NOTED DIMENSIONS ON THE DRAWING.

INDICATION DIMENSIONS S.P.C DENOTES S.P.C. DIMENSIONS  
 \* INDICATION DIMENSIONS CRITQUES DENOTES CRITICAL DIMENSIONS  
 ● INDICATION DIMENSIONS FONCTIONNELLES DENOTES FUNCTIONAL DIMENSIONS  
 QUANTITE PAR FEUILLE INDIVIDUELLE QUANTITY PER INDIVIDUAL SHEET  
 2 4




2	B
1	B
SHT	REV

Assembled terminal Part number MOLEX	Crimping Range Gammes de sertissage	Material Terminal's Body Matière Corps du contact	Material / Matière Terminal's Sleeve Cage de protection	Part weight Poids Pièce (grams)	Crimp area dimension table / Tableau des dimensione zone de sertissage														
					Length Longueur					conductor crimp sertissage conducteur					Insulation Crimp Sertissage isolant				
					A	B	C	RC	E	F	I	RI	G	H	J				
98195-1211	0.35 to 0.50 mm <sup>2</sup>	CuCrSITI Tin pre-plated, Tin Thickness : 1-3 μm, HOT TIN DIP	Stainless Steel X12 CrNi 17.7	Body/Corps: 0.17 Sleeve/Cage : 0.09	3.40	5.10	7.60	R0.50	1.90	2.10	0.40	R1.00	2.90	2.90	0.20				
98195-1212	0.5 to 1 mm <sup>2</sup>	CuCrSITI Tin pre-plated, Tin Thickness : 1-3 μm, HOT TIN DIP		Body/Corps: 0.18 Sleeve/Cage : 0.09	3.40	5.10	7.60	R0.60	2.50	2.90	0.40	R1.00	3.80	3.90	0.20				
98195-1213	>1 to 2.5 mm <sup>2</sup>	CuCrSITI Tin pre-plated, Tin Thickness : 1-3 μm, HOT TIN DIP		Body/Corps: 0.21 Sleeve/Cage : 0.09	3.40	5.20	7.60	R0.90	3.60	3.40	0.40	R1.15	4.50	4.20	0.20				

EC NO: G2004-0072 DRW/LLSTICKEI: 2003/09/08 CHKD: PDE/HELZ003/09/08 APPR: CBOUCHANZ003/09/16	GENERAL TOLERANCES (UNLESS SPECIFIED)	SCALE 10:1	DESIGN UNITS METRIC	FIRST ANGLE PROJECTION	REVISE ON CAD ONLY
	4 PLACES ± --- ± ---	mm INCH	DIMENSION STYLE MM ONLY		TITLE
	3 PLACES ± --- ± ---		DRAWN BY DATE		MOX MOLEX INCORPORATED
	2 PLACES ± 0.05 ± ---		PDE 2001/03/10		
1 PLACE ± 0.10 ± ---		CHECKED BY DATE		DOCUMENT NO.	
	ANGULAR ±1/2°	LST 2001/08/20		SHEET NO.	
DRAFT WHERE APPLICABLE MUST REMAIN WITHIN DIMENSIONS		APPROVED BY DATE		1 OF 2	
		WMO 2001/09/17		SEE CHART SD-98195-002	
THIS DRAWING CONTAINS INFORMATION THAT IS PROPRIETARY TO MOLEX INCORPORATED AND SHOULD NOT BE USED WITHOUT WRITTEN PERMISSION					

### SERTISSAGE CRIMPING

FL / WIRE		CONTACT / TERMINAL REFERENCES PART #		PARAMETRES DE SERTISSAGE CRIMPING PARAMETERS																					
TYPE	SECTION REELLE REAL SECTION	NOMBRE DE BRAS STRANDS NUMBER	DIA. BRAS MAX. MAX STRANDS DIA.	DIAMETRE ISOLANT ISOLATION DIAMETER	VERSION ETAMEE TIN PLATED VERSION	VERSION DOREE GOLD PLATED VERSION	HAUTEUR H (mm)	LARGEUR WITH COUS (mm)	TOLERANCE POUR INFORMATION POUR INFORMATION	Poinçon Conducteur Conductor Punch				Ecluse Conducteur Conductor Anvil				Poinçon Isolant Insulation Punch				Ecluse Isolant Insulation Anvil			
										RL (mm)	M (mm)	N (mm)	O (mm)	P (mm)	R.O (mm)	R (mm)	RS (mm)	U (mm)	V (mm)	W (mm)	RX (mm)	Y (mm)	Z (mm)		
0.22 03	0.22 mm <sup>2</sup>	7	0.25	1.20	9895-1211	T&D	0.85 ±0.03	14	> 50 N	0.36	1.35	5.50	9.0	0.13	100	1.35	1.40 ±0.05	2.15	1.08	6.20	9.8	0.39	1.40	2.25	0.20
0.35 R3	0.34 mm <sup>2</sup>	7	0.30	1.30			0.90 ±0.03	14	> 60 N	0.36	1.35	5.50	9.00	0.13	100	1.35	1.70 ±0.05	2.20	1.08	6.20	9.8	0.39	1.40	2.25	0.20
0.50 03	0.495 mm <sup>2</sup>	7	0.31	1.40			0.95 ±0.03	14	> 80 N	0.36	1.35	5.50	9.00	0.13	100	1.35	1.85 ±0.05	2.20	1.08	6.20	9.8	0.39	1.40	2.25	0.20
0.50 03	0.495 mm <sup>2</sup>	7	0.31	1.40	9895-1212	T&D	1.05 ±0.03	185	> 80 N	0.48	1.80	6.00	9.00	0.23	110	1.80	1.90 ±0.05	2.45	1.08	6.20	9.8	0.39	1.40	2.25	0.20
0.60 R3	0.59 mm <sup>2</sup>	12	0.25	1.80			1.10 ±0.03	185	> 100 N	0.48	1.80	6.00	9.00	0.23	110	1.80	2.10 ±0.05	2.45	1.20	6.50	9.8	0.41	1.60	2.50	0.20
0.75 03	0.79 mm <sup>2</sup>	19	0.23	1.70			1.15 ±0.03	185	> 100 N	0.48	1.80	6.00	9.00	0.23	110	1.80	2.05 ±0.05	2.45	1.20	6.50	9.8	0.41	1.60	2.50	0.20
1.00 03	0.93 mm <sup>2</sup>	19	0.25	1.80	9895-1213	T&D	1.25 ±0.03	185	> 120 N	0.48	1.80	6.00	9.00	0.23	110	1.80	2.10 ±0.05	2.45	1.20	6.50	9.8	0.41	1.60	2.50	0.20
1.40 R3	1.33 mm <sup>2</sup>	27	0.25	2.30			1.35 ±0.03	25	> 180 N	0.649	2.45	6.00	9.20	0.31	150	2.45	2.60 ±0.05	2.65	1.248	6.60	10.3	0.49	1.60	2.60	0.30
1.50 03	1.53 mm <sup>2</sup>	19	0.25	2.20			1.40 ±0.03	25	> 180 N	0.649	2.45	6.00	9.20	0.31	150	2.45	2.60 ±0.05	2.65	1.248	6.60	10.3	0.49	1.60	2.60	0.30
2.00 R3	1.82 mm <sup>2</sup>	37	0.25	2.60	9895-1213	T&D	1.50 ±0.03	25	> 220 N	0.649	2.45	6.00	9.20	0.31	150	2.45	2.70 ±0.05	2.65	1.248	6.60	10.3	0.49	1.60	2.60	0.30
2.00 03	1.88 mm <sup>2</sup>	60	0.20	2.45			1.50 ±0.03	25	> 220 N	0.649	2.45	6.00	9.20	0.31	150	2.45	2.70 ±0.05	2.65	1.248	6.60	10.3	0.49	1.60	2.60	0.30
2.50 03	2.45 mm <sup>2</sup>	50	0.25	2.80			1.55 ±0.03	25	> 220 N	0.649	2.45	6.00	9.20	0.31	150	2.45	2.75 ±0.05	2.65	1.248	6.60	10.3	0.49	1.60	2.60	0.30

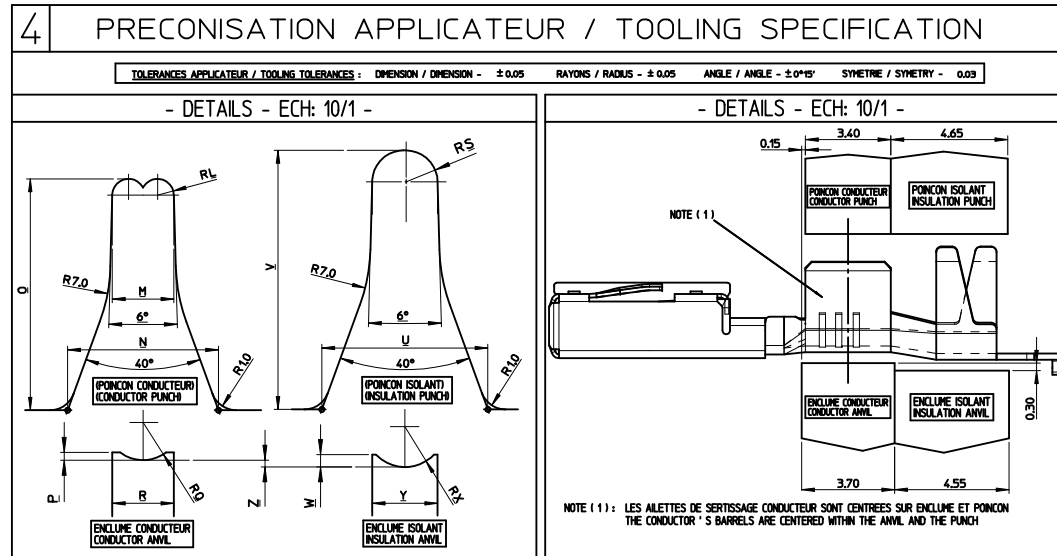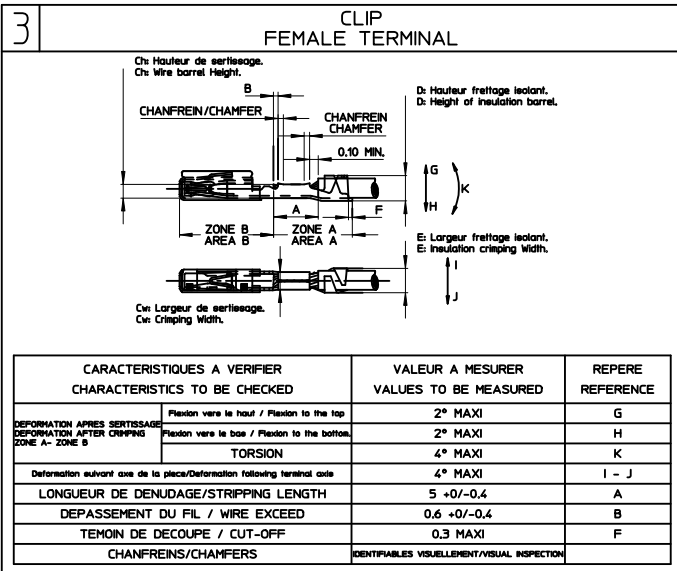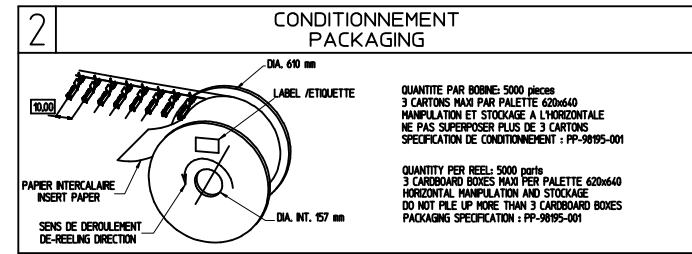

EC NO: G2004-0072 DRW: LST/CKE / 2003/09/08 CHKD: PDE/HEL/Z003/09/08 APPR: CB/UCHANZ003/09/16	GENERAL TOLERANCES (UNLESS SPECIFIED)	SCALE 1:1	DESIGN UNITS METRIC	FIRST ANGLE PROJECTION	REVISE ON CAD ONLY
	4 PLACES ± --- ± ---	DIMENSION STYLE MM ONLY	DRAWN BY DATE	TITLE	MOX 1.5MM TERMINAL RECEPTACLE TERMINAL CONTROL SPECIFICATION
	3 PLACES ± --- ± ---	PDE 2001/03/10	CHECKED BY DATE	2 OF 2	
	2 PLACES ± 0.05 ± ---	APPROVED BY DATE	WMO 2001/09/17	MATERIAL NO. DOCUMENT NO.	SHEET NO. 2 OF 2
1 PLACE ± 0.10 ± ---	ANGULAR ±1/2°	DRAFT WHERE APPLICABLE MUST REMAIN WITHIN DIMENSIONS			
THIS DRAWING CONTAINS INFORMATION THAT IS PROPRIETARY TO MOLEX INCORPORATED AND SHOULD NOT BE USED WITHOUT WRITTEN PERMISSION					

# Mouser Electronics

Authorized Distributor

Click to View Pricing, Inventory, Delivery & Lifecycle Information:

[Molex:](#)

[98195-1212](#)