


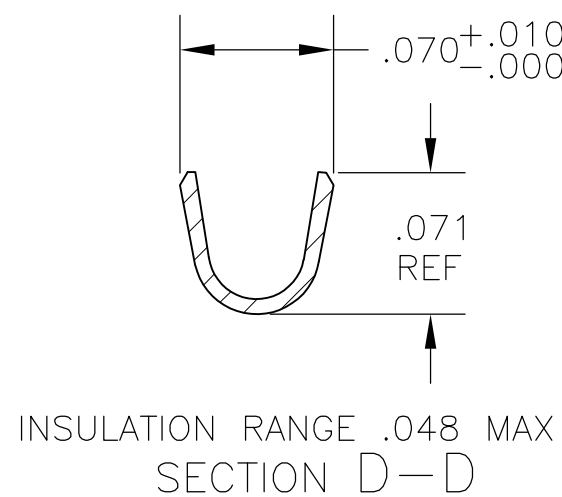

- 1 GOLD PLATING IS NOT REQUIRED IN THIS AREA.
- 2 CUT-OUTS ON THE BOX ARE AT MANUFACTURERS OPTION.
- 3 THIS TERMINAL IS REELED FOR THE STANDARD APPLICATOR.
- 4 THIS TERMINAL IS REELED FOR THE MINI APPLICATOR.
- 5 .000030 GOLD ON THE CONTACT AREA, GOLD FLASH ON THE REMAINDER ALL OVER .000050 NICKEL.
- 6 .000015 GOLD ON THE CONTACT AREA, GOLD FLASH ON THE REMAINDER ALL OVER .000050 NICKEL.
- 7 .000100—.000200 BRIGHT TIN—LEAD OVER .000050 NICKEL.
- 8 SHEARED EDGES ARE PERMITTED TO BE UNPLATED.
- 9 .000015 GOLD ON THE CONTACT AREA, .000050 NICKEL ON THE REMAINDER.
- 10 .000050 GOLD ON THE CONTACT AREA, GOLD FLASH ON THE REMAINDER ALL OVER .000050 NICKEL.
- 11 POINT OF MEASUREMENT FOR PLATING THICKNESS (INSIDE BEAMS).
- 12 .000015 GOLD ON THE CONTACT AREA, .000100—.000200 BRIGHT TIN—LEAD ON AREA Z, ALL OVER .000050 NICKEL.
- 13 .000030 GOLD ON THE CONTACT AREA, .000100—.000200 BRIGHT TIN—LEAD ON AREA Z, ALL OVER .000050 NICKEL.
- 14 OBSOLETE PART NUMBERS.
- 15 SUPERSEDED BY 2-87522-2.
- 16 .000030 GOLD ON THE CONTACT AREA, .000100—.000200 MATTE TIN ON AREA Z, ALL OVER .000050 NICKEL.

Mouser Electronics

Authorized Distributor

Click to View Pricing, Inventory, Delivery & Lifecycle Information:

[TE Connectivity:](#)

[2-87522-2](#)