
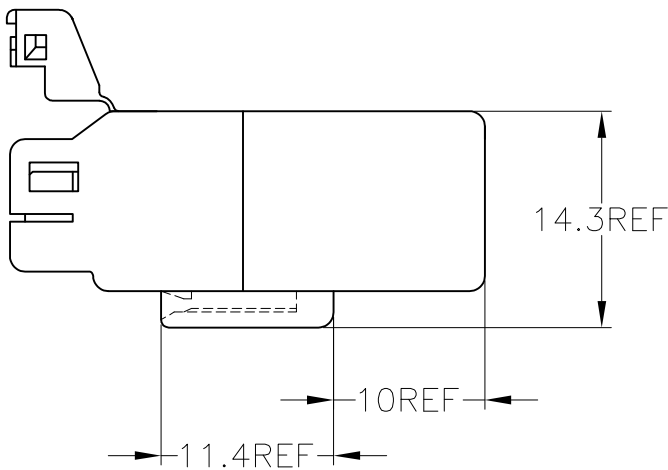
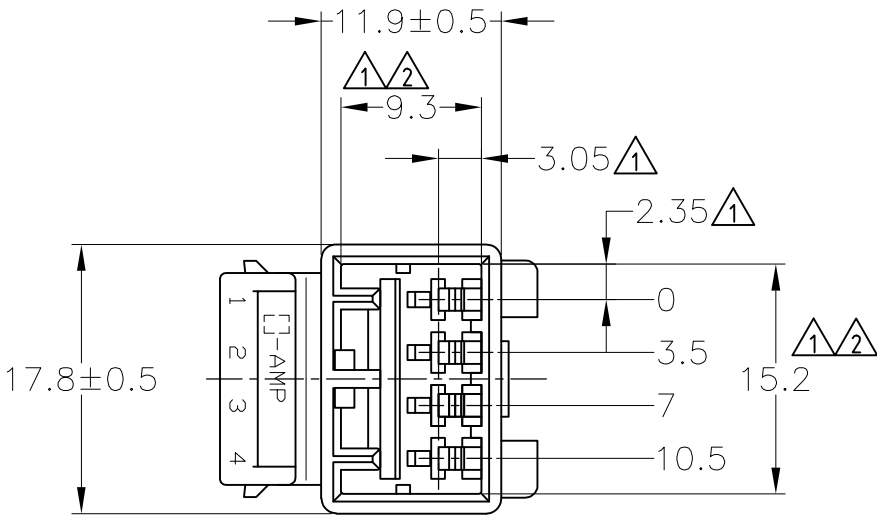


LOC J	DIST —	REVISIONS					
		P	LTR	DESCRIPTION	DATE	DWN	APVD
			C3	REVISED PER ECO—11—005140	28MAR11	RK	HMR

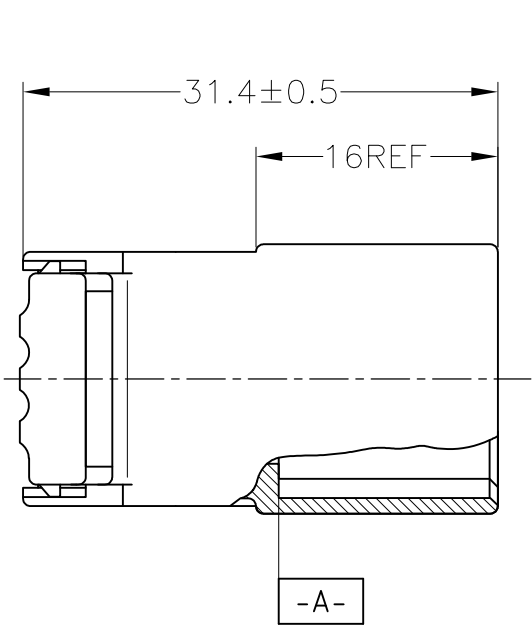

- 1

-A-

面より2mmの範囲で測定。
- 2

相手ハウジングと所定の機能を満足して嵌合できること。
3. 内装するタブコンタクト型番：173633, 173645
4. 嵌合相手ハウジング型番：174922 他
5. 製品規格：108-5264
- 1

MUST BE KEPT BETWEEN -A- AND 2.
- 2

TO BE MATED WITH THE PLUG HSG SMOOTHLY.
3. APPLIED TAB CONTACT PN: 173633, 173645
4. APPLIED PLUG HSG PN: 174922 etc.
5. PRODUCT SPEC: 108-5264

黄 YELLOW	174929-7
灰 GRAY	174929-6
青 BLUE	174929-5
緑 GREEN	174929-4
黒 BLACK	174929-2
白 WHITE	174929-1
色 COLOR	型番 PN

WIRE RANGE 抱合電線断面積	—	INSULATION DIA 被覆外径	—
-----------------------	---	------------------------	---



NAME 名称				070 SERIES MULTI-LOCK I/O CONNECTOR 4POSITION CAP HOUSING (W-W)			
SIZE	CAGE CODE	DRAWING NO 番号		RESTRICTED TO			
A3	00779	C-174929		—			

DWN	A. YAMAGUCHI	09JAN02
CHK	K. BETSUI	10JAN02
APVD	K. BETSUI	10JAN02
PRODUCT SPEC	製品規格	
APPLICATION SPEC	取付適用規格	
WEIGHT	4 g	
CUSTOMER DRAWING		

THIS DRAWING IS A CONTROLLED DOCUMENT.	
DIMENSIONS: 単位： 耗 mm	TOLERANCES UNLESS OTHERWISE SPECIFIED: 一般公差
	0 PLC ± — 1 PLC ± — 2 PLC ± — 3 PLC ± — 4 PLC ± — ANGLES ± —
MATERIAL 材料	FINISH 仕上
PBT	—

TOLERANCE UNLESS OTHERWISE SPECIFIED: 一般公差	
0 < x ≤ 10	: ±0.2
10 < x ≤ 30	: ±0.25
30 < x ≤ 100	: ±0.3
ANGLE ; 角度	±3°

Mouser Electronics

Authorized Distributor

Click to View Pricing, Inventory, Delivery & Lifecycle Information:

[TE Connectivity:](#)

[174929-2](#)