

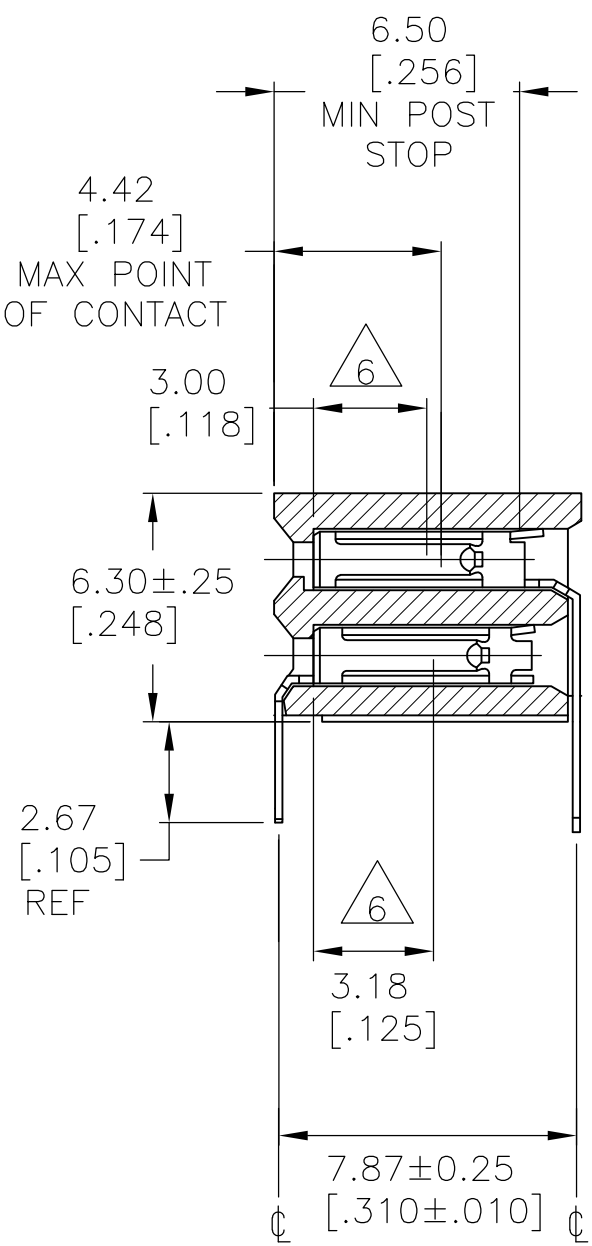
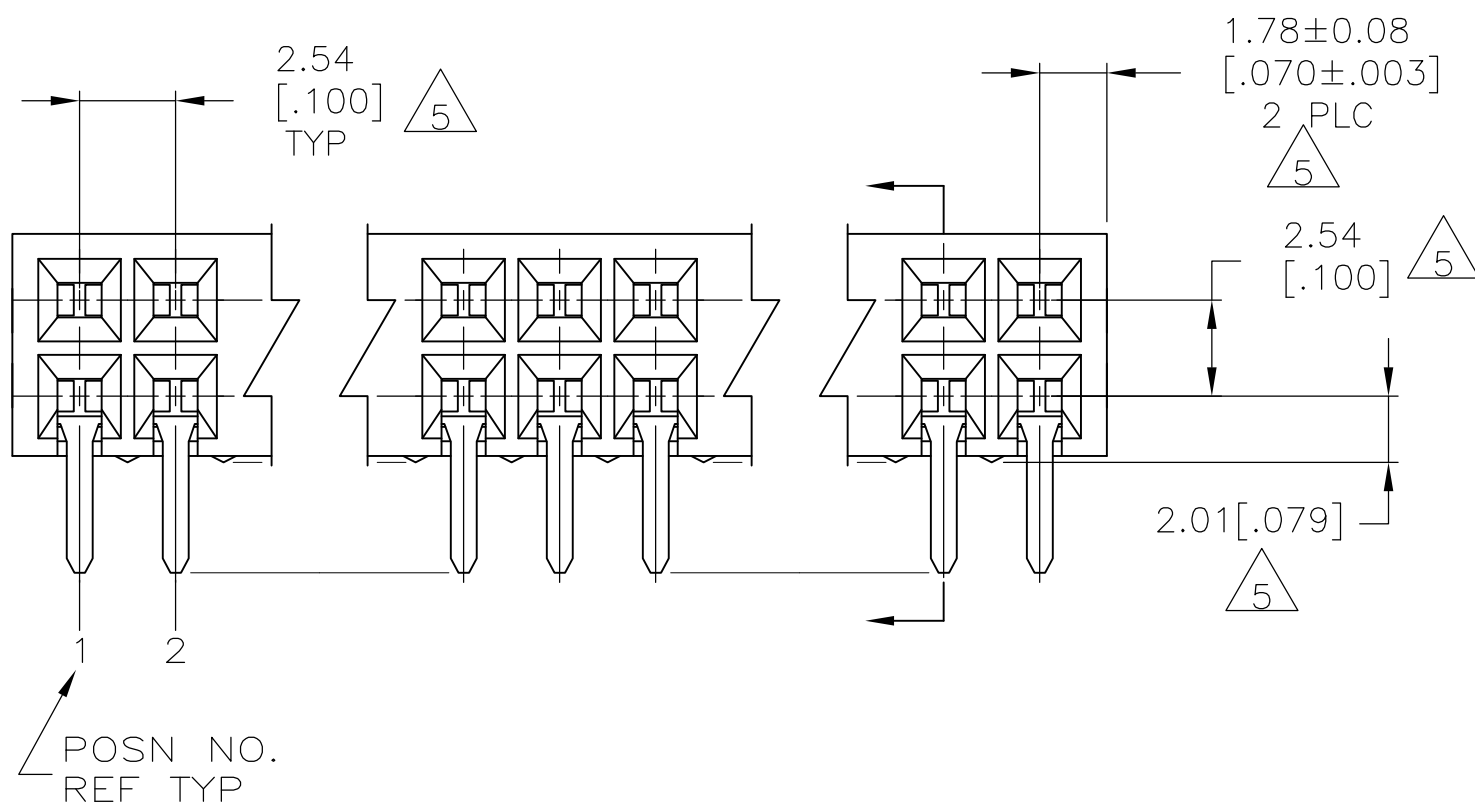


LOC	DIST	REVISIONS				
		P	LTR	DESCRIPTION	DATE	DWN APVD
AD	00	G	EC	063C 0058 05	03MAR05	BSV JRO
		G1	REVISED	PER ECO-09-021826	14SEP09	KK AEG

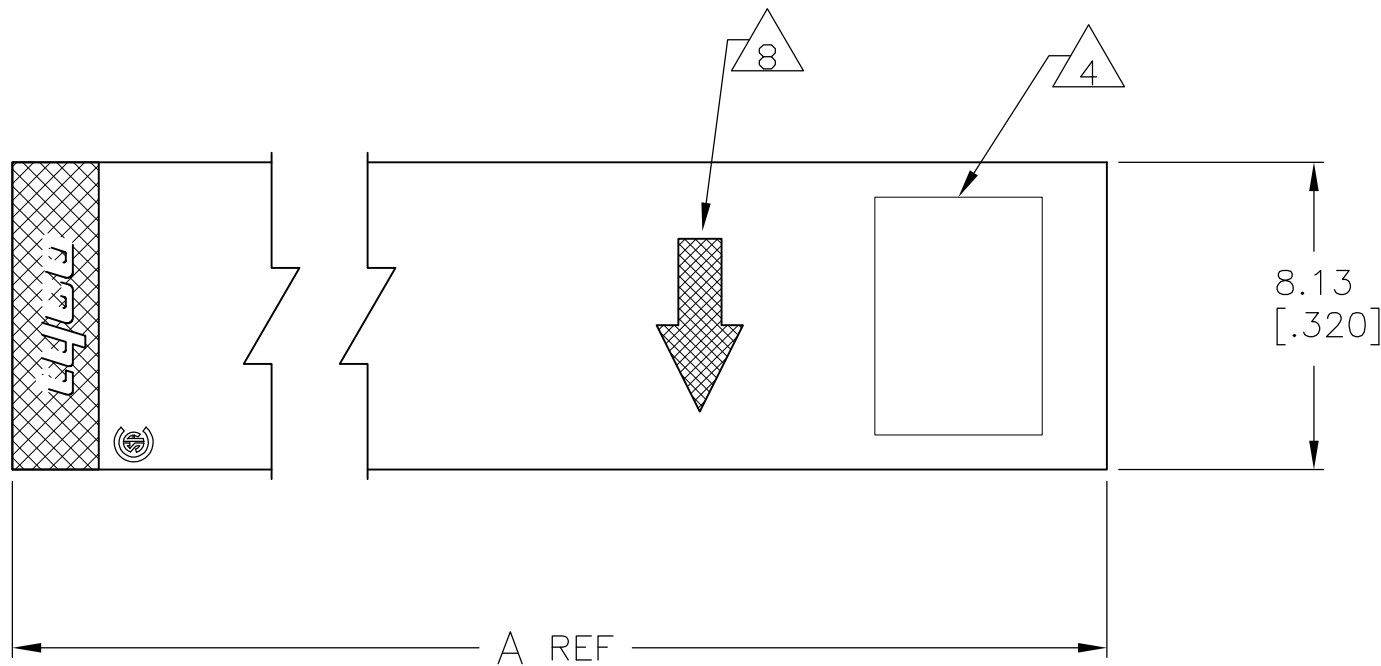

- 1 HOUSING MATERIAL: GLASS-FILLED, FLAME-RETARDANT, POLYESTER.
- 2 CONTACT MATERIAL : PHOSPHOR BRONZE.
- 3 CONTACT FINISH: DUPLEX PLATED .000030 GOLD ON CONTACT AREA, .000150-.000300 BRIGHT TIN-LEAD ON SOLDER LEADS, ALL OVER .000050 MINIMUM NICKEL
- 4 DATE CODE AND PART NUMBER ARE MARKED IN APPROXIMATE LOCATION SHOWN.
- 5 DIMENSIONS PERTAIN TO CAVITY CENTERLINES.
- 6 POINT OF MEASUREMENT FOR PLATING THICKNESS OF CONTACT AREA.
- 7. CONTACTS SHALL MEET AN AVERAGE INSERTION FORCE OF 2,75 OUNCES OR LESS AND MIN WITHDRAWAL FORCE OF 0.5 OUNCES.
- 8 MOLDED IN ARROW DESIGNATES THE MATING FACE OF THE CONNECTOR.
- 9 CONTACT FINISH: DUPLEX PLATED .000030 GOLD ON CONTACT AREA, .000150-.000300 MATTE TIN ON SOLDER LEADS, ALL OVER .000050 MINIMUM NICKEL
- 10 ROHS 2002/95/EC COMPLIANT
- 11 OBSOLETE PARTS: OBSOLETE CIS STREAMLINING PER D.RENAUD/D.SINISI

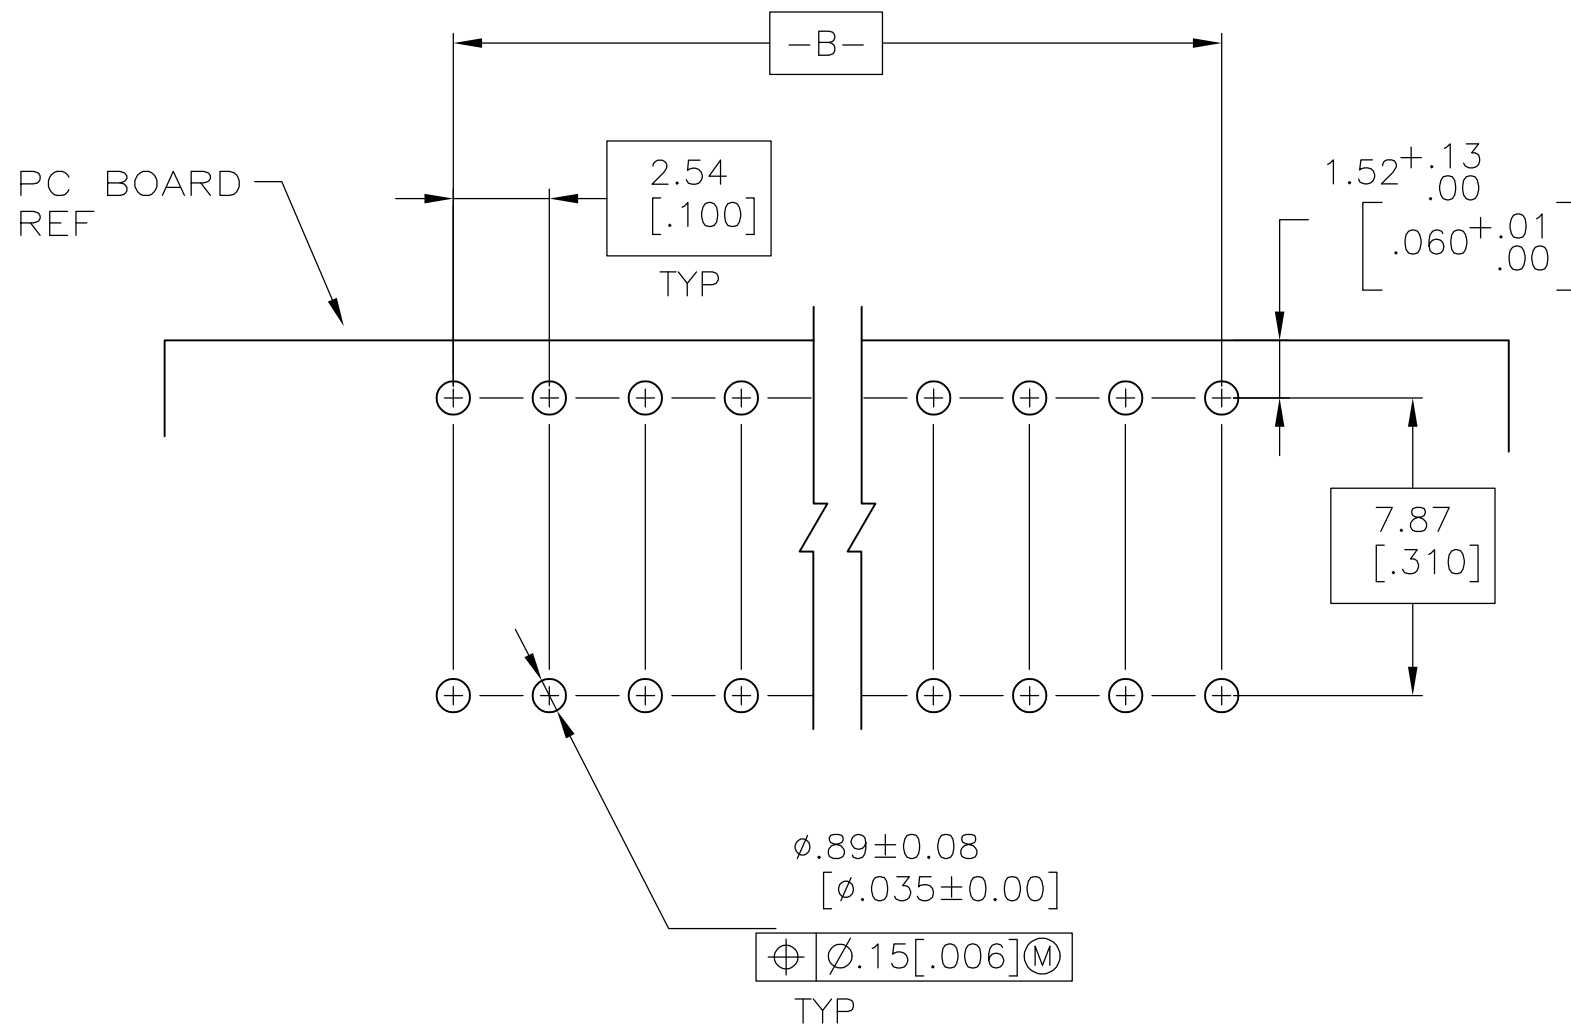

RECOMMENDED PC BOARD LAYOUT

11	OBSOLETE	9	63.50 [2.500]	67.06 [2.640]	52	10	5-535593-1
		3	63.50 [2.500]	67.06 [2.640]	52		535593-1
	FINISH		B	A	NO OF POSN		PART NUMBER

THIS DRAWING IS A CONTROLLED DOCUMENT.		DWN R BROWN 9/4/96	Tyco Electronics Corporation Harrisburg, Pa 17105-3608	
DIMENSIONS: mm [INCHES]		CHK J GESFORD 9/4/96	NAME: D SARVER 9/4/96	
TOLERANCES UNLESS OTHERWISE SPECIFIED:		APVD D SARVER 9/4/96	RECEIPT. ASSY., MOD II, HORIZ., .100 CL DOUBLE ROW CLOSED ENTRY, LOW-FORCE SHORT POINT OF CONTACT, HIGH TEMPERATURE, HIGH STANDOFFS.	
MATERIAL		APPLICATION SPEC	SIZE	RESTRICTED TO
FINISH		WEIGHT	CAGE CODE	DRAWING NO
1 2		3 9	A1	00779
CUSTOMER DRAWING		SCALE	SHEET	REV
		5:1	1 of 1	G1

Mouser Electronics

Authorized Distributor

Click to View Pricing, Inventory, Delivery & Lifecycle Information:

[TE Connectivity:](#)

[535593-1](#)