

THIS DRAWING IS UNPUBLISHED.

RELEASED FOR PUBLICATION

OCT , 2016.






© COPYRIGHT 2016 Tyco Electronics Japan G.K.

ALL RIGHTS RESERVED.

REVISIONS

変更

P	LTR	DESCRIPTION	DATE	DWN	APVD
	E5	REVISED	ECR-16-003341	14OCT2016	KF HY

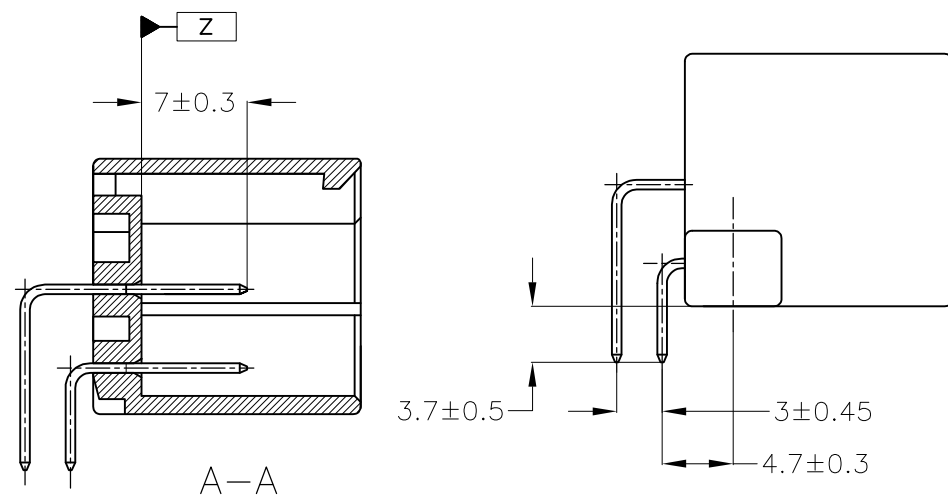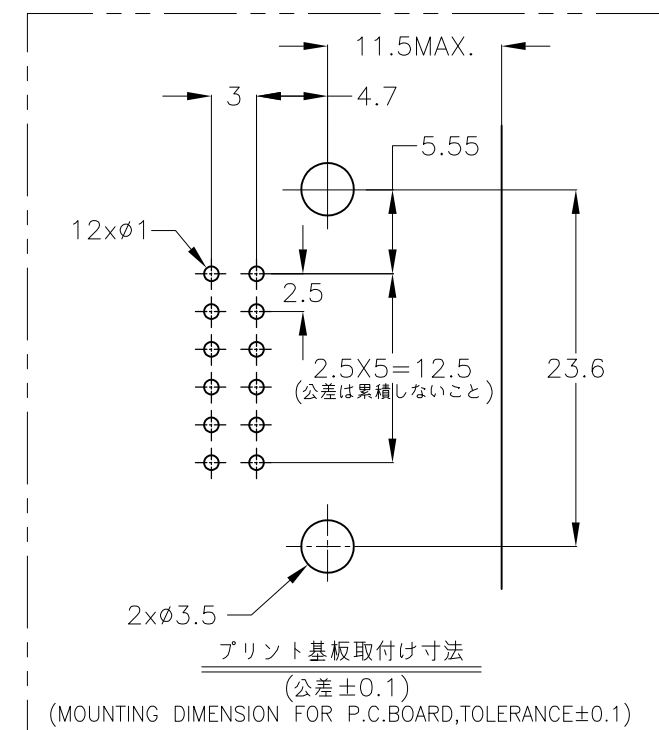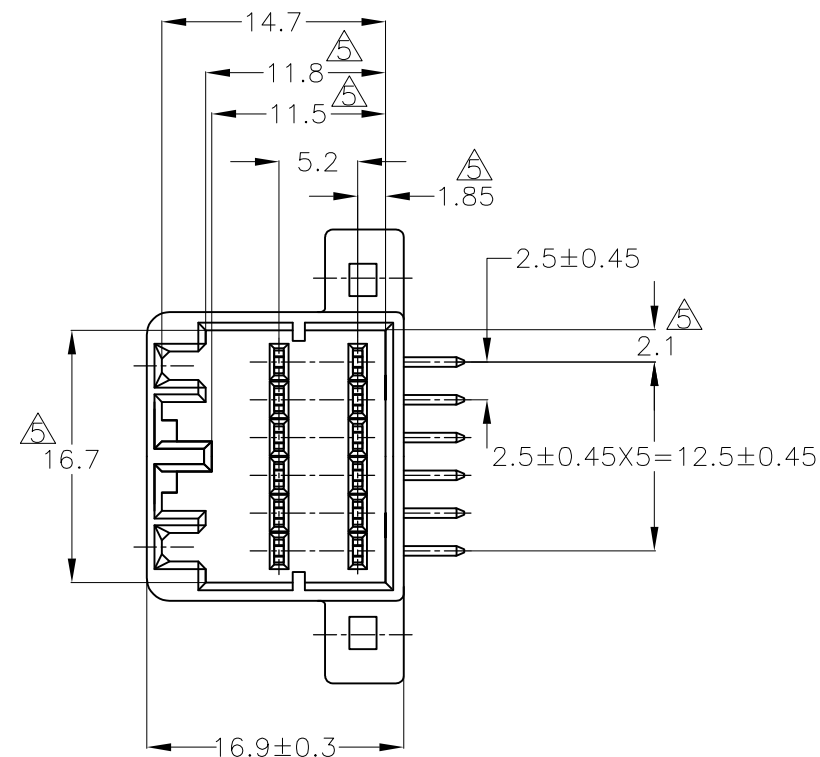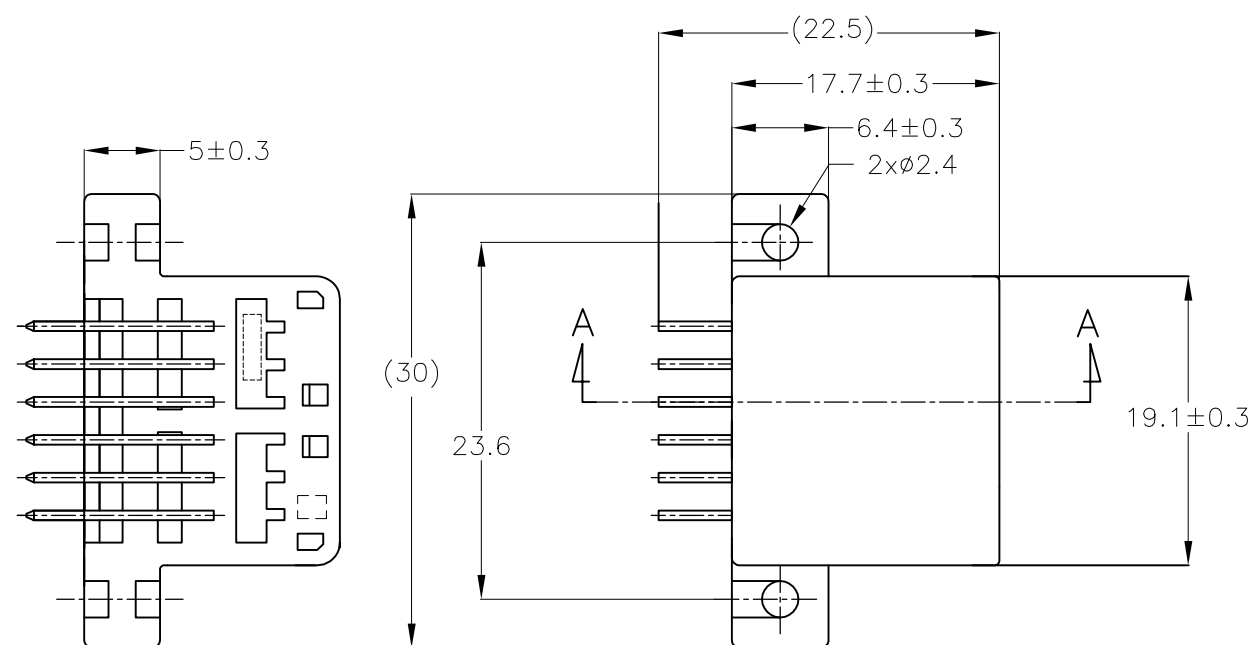

- 1 APPLICABLE P.C.B. BOARD THICKNESS; 1.6mm
- 2 RECOMMENDED MOUTING SCREW 3mmDIA
6mmLENGTH(MIN)
TAPPING SCREW SPECIFIED IN JIS B1115,B1122
(TIGHTENING TORQUE;0.392N・m MAX)
- 3 THE MATING PLUG HSG PART NUMBER;175965
- 4 APPLICABLE PRODUCT SPEC NO.;108-5281
- △ TO BE MEASURED WITHIN 2mm FROM Z
- △ CIRCUIT NUMBER.

- 1 適用プリント基板厚:1.6mm
- 2 推奨取付ネジ: JIS B1115,B1122 タッピングネジ、
ナベ2種呼び径3、長さ6mm以上 (締付トルク: 0.392N・m以下)
- 3 嵌合相手ハウジング: 175965
- 4 適用製品規格番号: 108-5281
- △ Zより2mmの範囲で測定。
- △ 回路番号: 下図参照のこと。

TOLERANCE UNLESS
OTHERWISE SPECIFIED:
一般公差

0<*≤ 10	: ±0.2
10<*≤ 30	: ±0.25
30<*≤ 100	: ±0.3

ANGLE ; ±3°
角度

THIS DRAWING IS A CONTROLLED DOCUMENT.

DIMENSIONS: 単位: 耗 mm	TOLERANCES UNLESS OTHERWISE SPECIFIED: 一般公差
	0-PLC ±=
	1-PLC ±=
	2-PLC ±=
	3-PLC ±=
	4-PLC ±=
	ANGLES ±=
MATERIAL 材料	FINISH 仕上
HSG : PBT CONTACT : BRASS	SEE TABLE

SELECTIVE-TIN (MATTE)	SELECTIVE GOLD X 12	1~12	BLACK	1-5175974-2
PRE-TIN X 9		1, 2, 8	GREEN	2-175974-4
TIN-LEAD	SELECTIVE GOLD X 3			
PRE-TIN X 9		1, 2, 8	BLACK	2-175974-2
TIN-LEAD	SELECTIVE GOLD X 3			
SELECTIVE-TIN (MATTE)	SELECTIVE-TIN	-	BLACK	175974-3
PRE-TIN		-	BLACK	175974-2
SOLDERING SIDE 半田付け部	CONTACT SIDE 接触部側	GOLD PLATED CIRCUIT NO △6 金めっき回路番号	COLOR 色	PART NUMBER 製品型番
CONTACT FINISH コンタクト仕上				

DWN A.YAMAGUCHI 20AUG04	TE Connectivity			
CHK H.YAMAGAMI 20AUG04				
APVD S.ISOHATA 20AUG04	NAME 名称			
PRODUCT SPEC 製品規格 108-5281	12POSITION CAP HOUSING ASSEMBLY(H-TYPE) 040 SERIES MULTILOCK I/O CONN MK-II			
APPLICATION SPEC 取付適用規格	SIZE	CAGE CODE	DRAWING NO 番号	RESTRICTED TO
WEIGHT 4.3 g	A3	00779	C-175974	-
CUSTOMER DRAWING		SCALE 尺度 2:1	SHEET 1 OF 1	REV E5

Mouser Electronics

Authorized Distributor

Click to View Pricing, Inventory, Delivery & Lifecycle Information:

[TE Connectivity:](#)

[175974-3](#)