


PC board drilling dimensions  
(after plating - thickness: 1.60 to 3.20 mm)

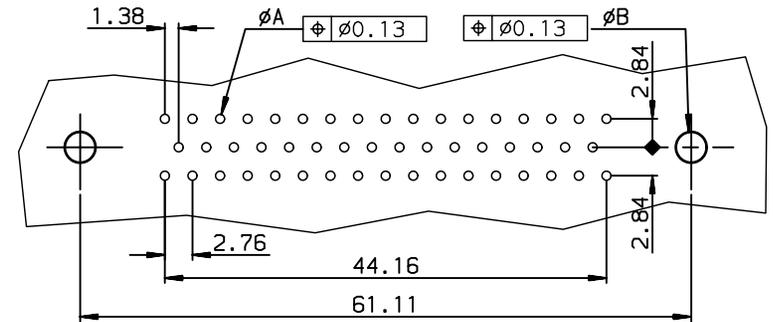

TIN LEAD PART NUMBER

PART NUMBER	
fLash gold	D50S91C4PA00
0.76µ gold	D50S91C6PA00

LEAD FREE PART NUMBER

PART NUMBER	
fLash gold	D50S91C4PA00LF
0.76µ gold	D50S91C6PA00LF

GENERAL CHARACTERISTICS AND ROHS INFORMATIONS:

SEE DRAWING C01-8646-0001

European Views

www.fciconnect.com		surface ISO 1302 ✓	tolerance std ISO 406 ISO 1101	projection mm
TOLERANCES UNLESS OTHERWISE SPECIFIED				
Dr	JARRY	1995/09/06	ANGULAR	0.X ±0.1
Eng	PESSON	1995/09/06	LINEAR	0.XX ±0.1
Chr	LEGARE	1995/09/06	0.XX ±2'	0.XXX ±0.1
Appr	LEGARE	1995/09/06	Product family	D-SUB
size				A3
Scale				2
ECN				LS06-0186
Spec ref				-
title			FEMALE CONNECTOR DELTA D 50-EUROPE	
catalog no			C01-8646-0366	
customer			sheet 1 of 1	
Rev.			E	

rev	ecn no	dr	date
B	-	JAR	1996/07/25
C	LS05-004	MPE	2005/02/10
D	LS06-0095	LGO	2006/06/28
E	LS06-0186	LGO	2006/09/25
-	-	-	-
-	-	-	-
-	-	-	-

REV F - 2006-04-17

# Mouser Electronics

Authorized Distributor

Click to View Pricing, Inventory, Delivery & Lifecycle Information:

[FCI / Amphenol:](#)

[D50S91C4PA00LF](#) [D50S91C6PA00LF](#) [D50S91C4PA00](#) [D50S91C6PA00](#)