



Part Number:

254-PS1515-RO

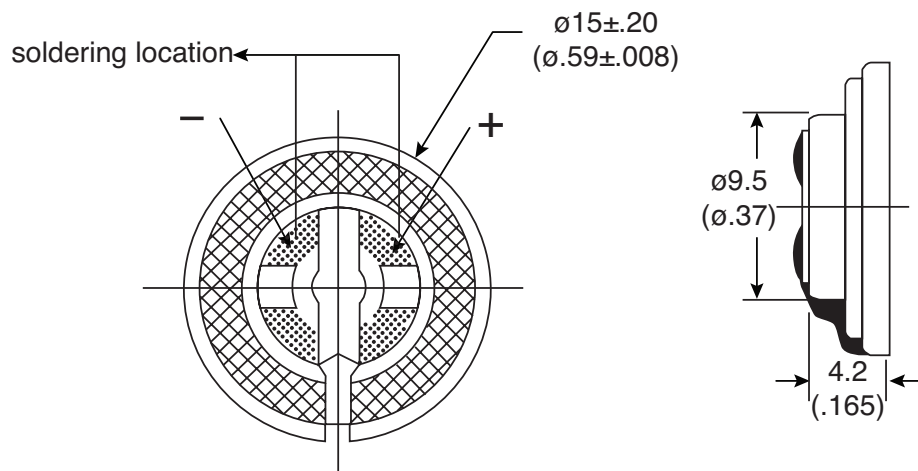

Frequency Response Curve

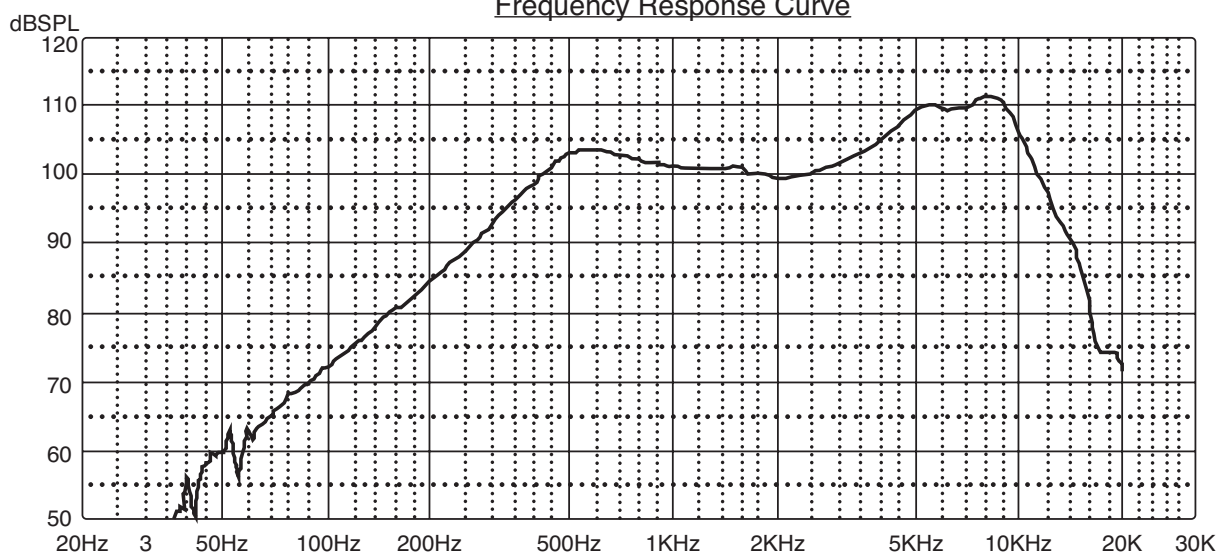

KT-400559

Electrical Specifications:

- Nominal Impedance: $150\Omega \pm 15\%$ at 1600Hz
- Power Rating: Normal 0.03W Maximum 0.05W
- Lowest Resonant Frequency: 500 ± 150 Hz
- Output Sound Pressure Level (S.P.L.):
99 $\pm$ 3dB 0.03W 0.01Meter
Average at 1000,1200,1500,2000Hz
- Frequency Range: 380~20,000Hz Average SPL-10dB
- Distortion: 5% Maximum at 1200Hz 0.03W

Material:

- Magnet: NdFeB
- Weight: Approx. 1.7 Grams

Mechanical Specifications:

- Operating Temperature: -25°C to +50°C
- Storage Temperature: -25°C to +55°C

Notes:

- RoHS Compliant

Mouser Electronics

Authorized Distributor

Click to View Pricing, Inventory, Delivery & Lifecycle Information:

Kobitone:

[254-PS1515-RO](#)