


THIS DRAWING IS UNPUBLISHED.

RELEASED FOR PUBLICATION

© COPYRIGHT - BY - ALL RIGHTS RESERVED.


LOC	DIST	REVISIONS					
		P	LTR	DESCRIPTION	DATE	DWN	APVD
-	-		A	RELEASED PER ECO 11-009364	5-9-11	BM	BM

- 1 MATERIALS:
BODY: BERYLLIUM COPPER PER ASTM B 196
CONTACT: BERYLLIUM COPPER PER ASTM B 196
DIELECTRIC: TEFLON PER ASTM D 1710
- 2 FINISHES:
BODY: .000050 MIN GOLD PLATE PER MIL-G-45204
CONTACT: .000050 MIN GOLD PLATE PER MIL-G-45204
3. FOR USE WITH .047 DIAMETER SEMI-RIGID CABLE
4. SMPM FEMALE INTERFACE PER MIL-STD-348A, FIGURE 328-1

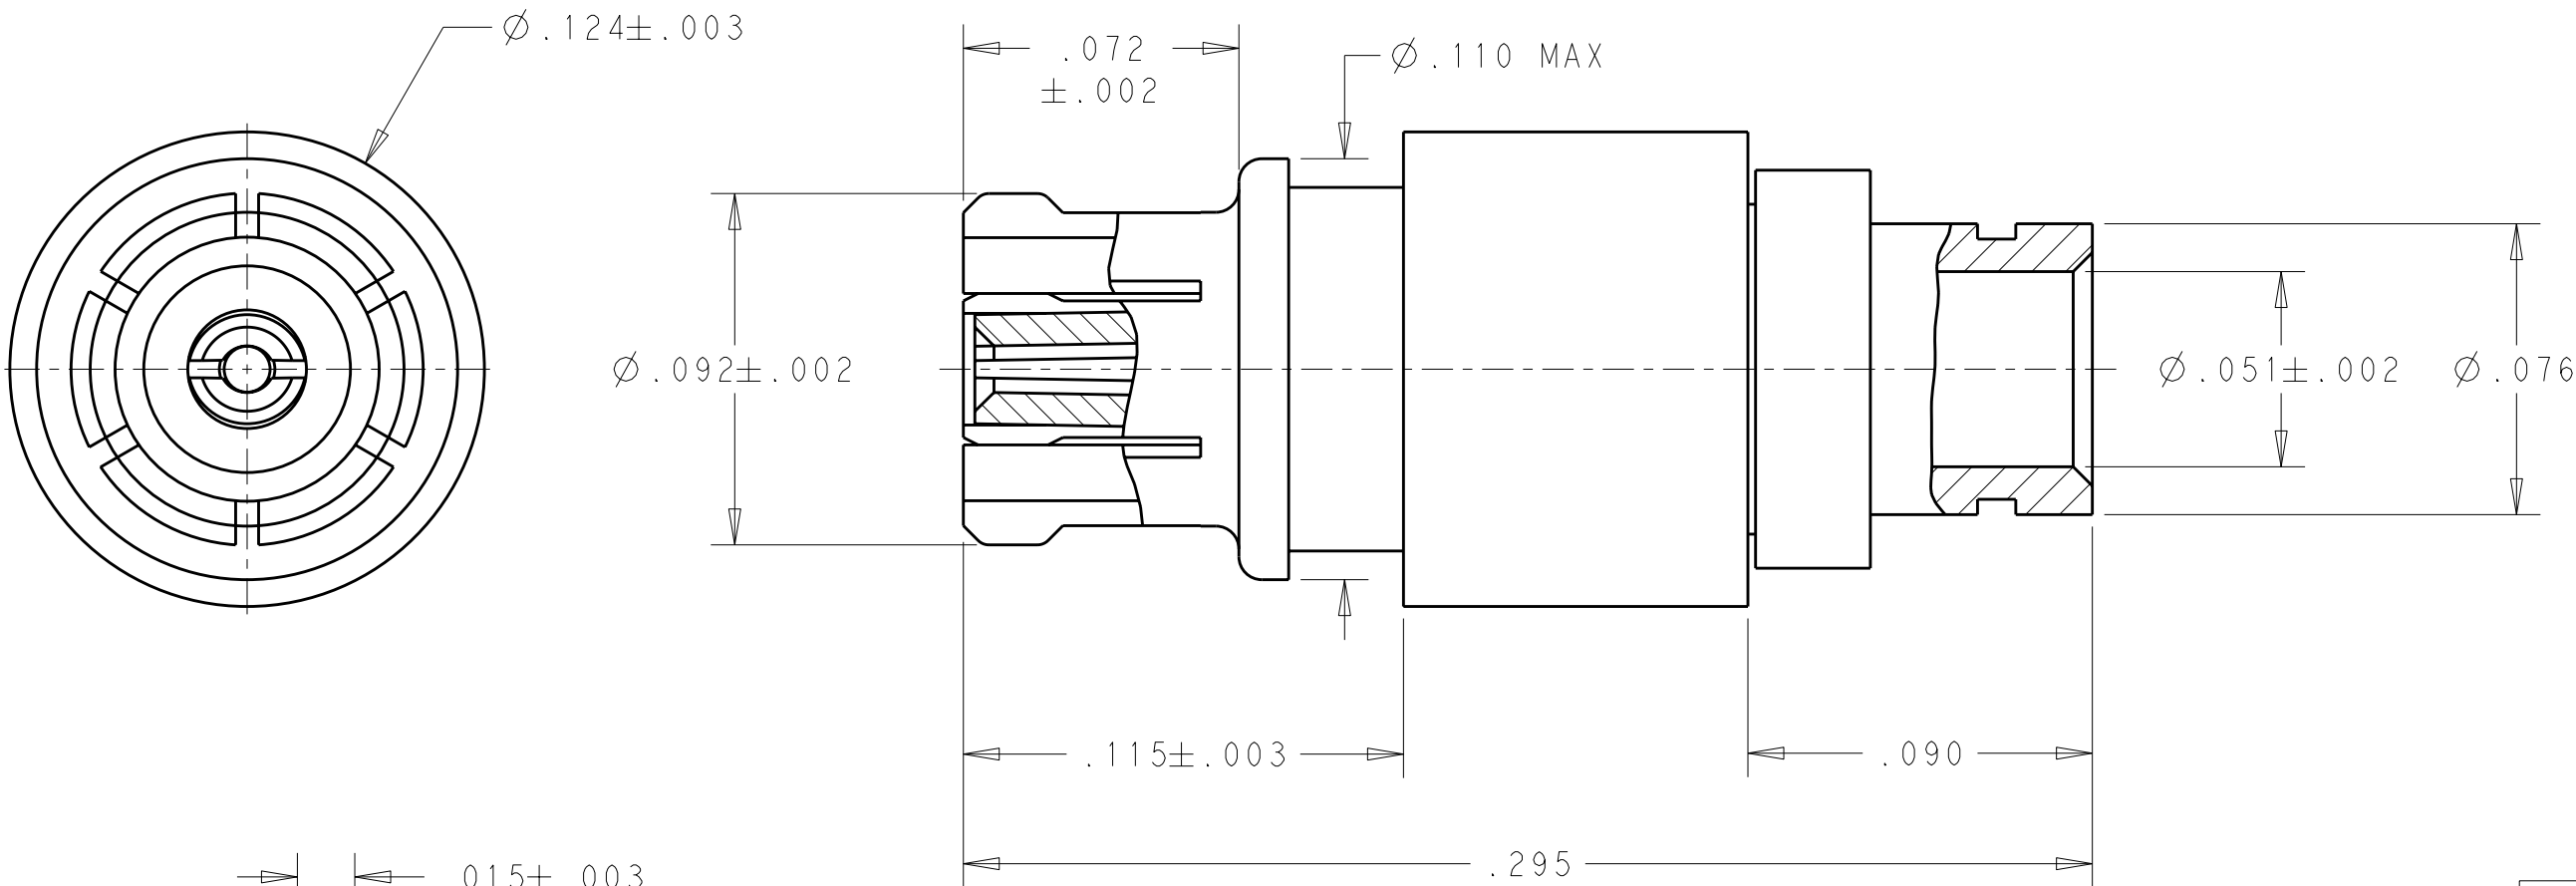

1757642-1
PART
NUMBER

RECOMMENDED CABLE STRIP LENGTHS

THIS DRAWING IS A CONTROLLED DOCUMENT.		DWN B. MOYER 02MAY2006	 TE Connectivity			
DIMENSIONS: INCHES		CHK C. THOMAS 05MAY2006				
		APVD B. MOYER 05MAY2006	NAME SMPM, FEMALE, CABLE JACK, STRAIGHT			
		PRODUCT SPEC 108-2326				
TOLERANCES UNLESS OTHERWISE SPECIFIED:		APPLICATION SPEC -	SIZE A3			
0 PLC $\pm .$ 1 PLC $\pm .$ 2 PLC $\pm .01$ 3 PLC $\pm .005$ 4 PLC $\pm .$ ANGLES $\pm 2^\circ$		WEIGHT -				
MATERIAL 1	FINISH 2	CUSTOMER DRAWING	CAGE CODE 00779		DRAWING NO C-1757642	RESTRICTED TO -
			SCALE 1:1		SHEET 1 OF 1	REV A

Mouser Electronics

Authorized Distributor

Click to View Pricing, Inventory, Delivery & Lifecycle Information:

[TE Connectivity:](#)

[1757642-1](#)