
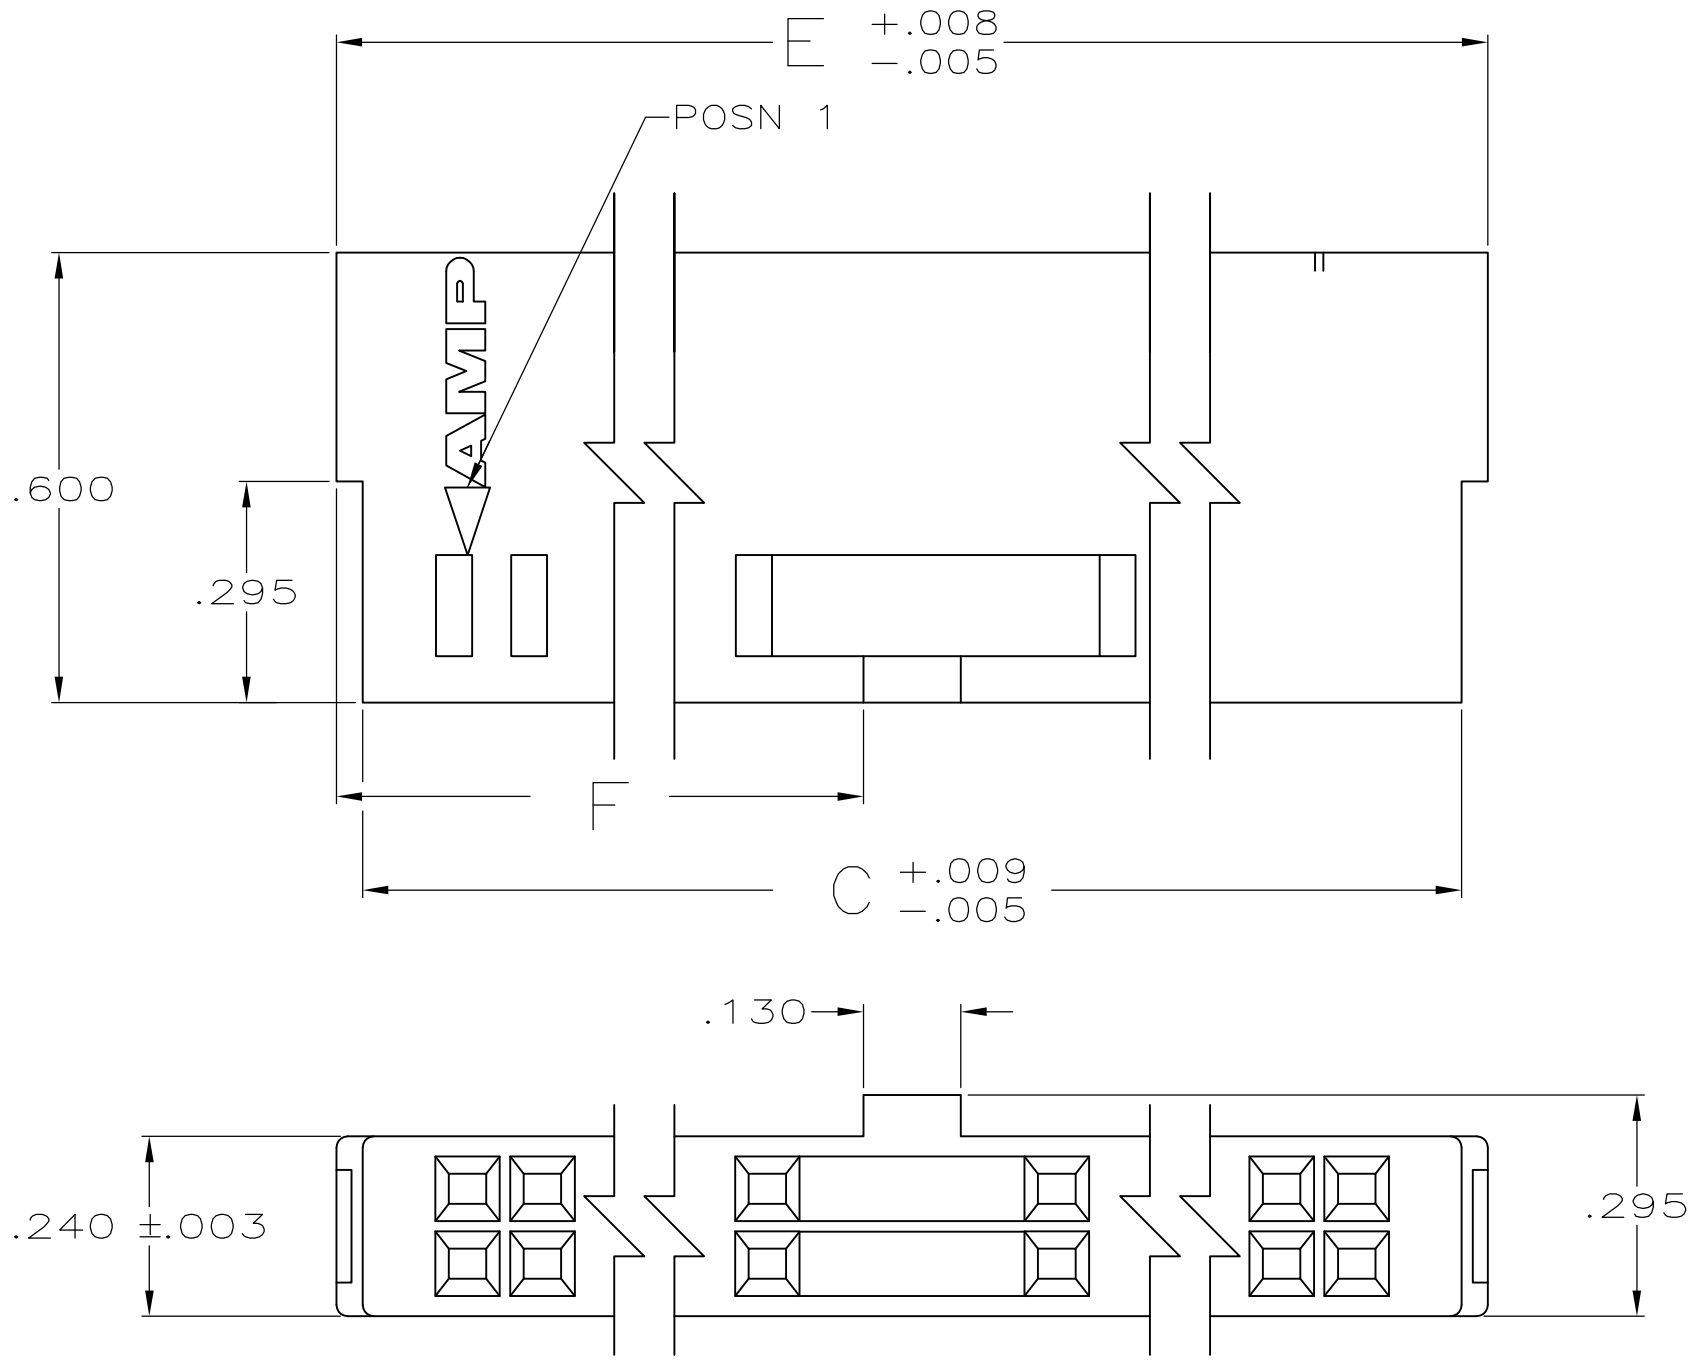


THIS DRAWING IS UNPUBLISHED. RELEASED FOR PUBLICATION
 © COPYRIGHT - By - ALL RIGHTS RESERVED.

LOC		DIST		REVISIONS			
P	LTR	DESCRIPTION		DATE	DWN	APVD	
AR	39	J1	REVISED PER ECO-11-004835		11MAR11	RK	HMR

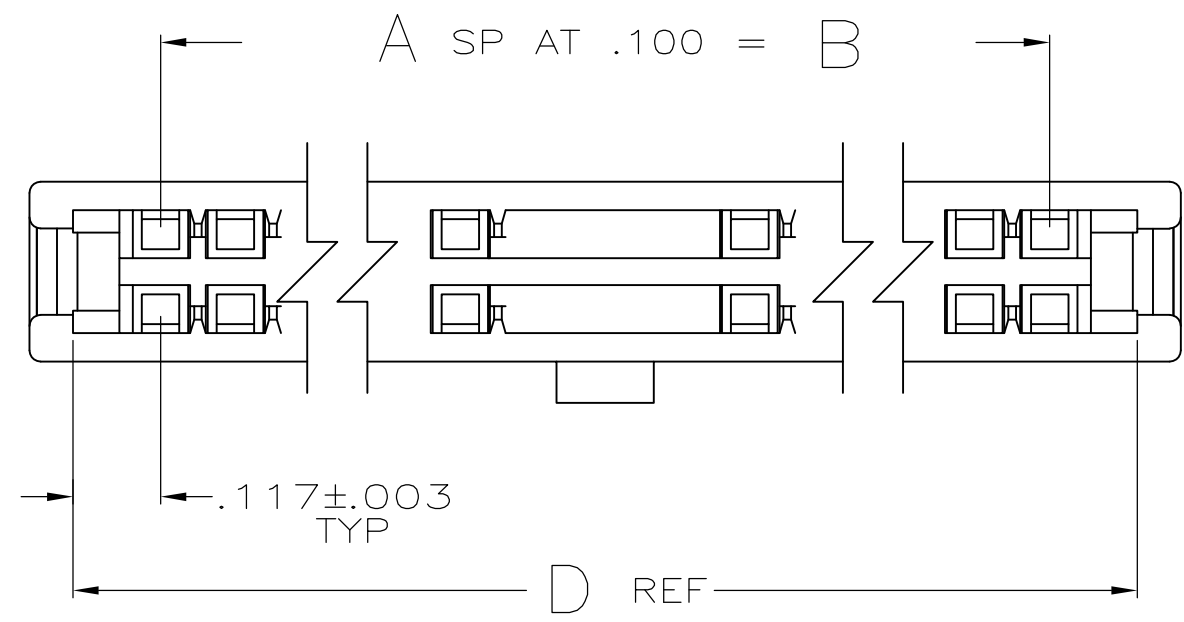

- 1 HOUSING WILL ACCOMMODATE FLEXIBLE FLAT CABLE ON .100 CENTERS AND/OR #22-32 AWG WIRE WITH INSULATION RANGE OF .025 TO .056
- 2 HOUSING WILL INTERFACE WITH MOD II LOW PROFILE SHROUDED HEADERS AND AMPLATCH UNIVERSAL EJECTION STYLE PIN HEADER ASSEMBLIES WITH LATCH DIMENSIONS OF A=.576
- 3 BRIGHT TIN-LEAD PLATED CONTACTS ARE NOT RECOMMENDED FOR USE IN THIS HOUSING OVER 40 POSITIONS

OBSOLETE	1.660	3.450	3.334	3.380	3.100	31	64	1-487223-6	
	1.560	3.250	3.134	3.180	2.900	29	60	1-487223-5	
OBSOLETE	1.460	3.050	2.934	2.980	2.700	27	56	1-487223-4	
OBSOLETE	1.410	2.950	2.834	2.880	2.600	26	54	1-487223-3	
OBSOLETE	1.310	2.750	2.634	2.680	2.400	24	50	1-487223-2	
OBSOLETE	1.160	2.450	2.334	2.380	2.100	21	44	1-487223-1	
	1.060	2.250	2.134	2.180	1.900	19	40	1-487223-0	
	.910	1.950	1.834	1.880	1.600	16	34	487223-9	
	.810	1.750	1.634	1.680	1.400	14	30	487223-8	
	.710	1.550	1.434	1.480	1.200	12	26	487223-7	
	.660	1.450	1.334	1.380	1.100	11	24	487223-6	
	.560	1.250	1.134	1.180	.900	9	20	487223-5	
OBSOLETE	.510	1.150	1.034	1.080	.800	8	18	487223-4	
	.460	1.050	.934	.980	.700	7	16	487223-3	
	.410	.950	.834	.880	.600	6	14	487223-2	
	.310	.750	.634	.680	.400	4	10	487223-1	
		F	E	D	C	B	A	NO OF POSN	PART NUMBER

THIS DRAWING IS A CONTROLLED DOCUMENT.

DWN H MOLL 8-4-88
 CHK G D MILLER 8-4-88
 APVD G D MILLER 8-4-88

STE TE Connectivity

NAME: HOUSING, RECEPTACLE, FFC .100X.100 CENTERLINE, DOUBLE ROW

PRODUCT SPEC: -
 APPLICATION SPEC: -

MATERIAL: FLAME RETARDANT THERMOPLASTIC; COLOR-BLACK
 FINISH: -

WEIGHT: -

SIZE: A2 CAGE CODE: 00779 DRAWING NO: C=487223 RESTRICTED TO: -

CUSTOMER DRAWING SCALE: 4:1 SHEET: 1 OF 1 REV: J1

Mouser Electronics

Authorized Distributor

Click to View Pricing, Inventory, Delivery & Lifecycle Information:

[TE Connectivity:](#)

[487223-1](#)