

**PLEASE CHECK WWW.MOLEX.COM FOR LATEST PART INFORMATION**

**Part Number:** [0444282402](#)  
**Status:** **Active**  
**Overview:** [Micro-Fit 3.0 Connector System Product Family](#)  
**Description:** [Micro-Fit BMI Header, Surface Mount Compatible, Dual Row, Right-Angle, with Snap-in Plastic Peg PCB Lock, 24 Circuits, 0.38µm Gold \(Au\) Selective Plating](#)

**Documents:**

|                                                              |                                                      |
|--------------------------------------------------------------|------------------------------------------------------|
| <a href="#">3D Model</a>                                     | <a href="#">Test Summary 444280001-TS-000 (PDF)</a>  |
| <a href="#">Drawing (PDF)</a>                                | <a href="#">RoHS Certificate of Compliance (PDF)</a> |
| <a href="#">Product Specification PS-44300-001-001 (PDF)</a> | <a href="#">Product Literature (PDF)</a>             |

**Agency Certification**


|     |         |
|-----|---------|
| CSA | LR19980 |
| UL  | E29179  |

**General**

|                             |                                                                  |
|-----------------------------|------------------------------------------------------------------|
| Product Family              | PCB Headers                                                      |
| Series                      | <a href="#">44428</a>                                            |
| Application                 | Board-to-Board, Power, Wire-to-Board                             |
| Comments                    | High Temperature Square Pin Solder Type Polarized to Mating Part |
| Overview                    | <a href="#">Micro-Fit 3.0 Connector System Product Family</a>    |
| Product Literature Order No | 987650-5984                                                      |
| Product Name                | Micro-Fit BMI                                                    |
| UPC                         | 800756379937                                                     |

**Physical**

|                                |                                |
|--------------------------------|--------------------------------|
| Breakaway                      | No                             |
| Circuits (Loaded)              | 24                             |
| Circuits (maximum)             | 24                             |
| Color - Resin                  | Black                          |
| Durability (mating cycles max) | 30                             |
| First Mate / Last Break        | No                             |
| Flammability                   | 94V-0                          |
| Glow-Wire Capable              | No                             |
| Guide to Mating Part           | No                             |
| Keying to Mating Part          | None                           |
| Lock to Mating Part            | Yes                            |
| Material - Metal               | Brass                          |
| Material - Plating Mating      | Gold                           |
| Material - Plating Termination | Tin                            |
| Material - Resin               | High Temperature Thermoplastic |
| Net Weight                     | 4.700/g                        |
| Number of Rows                 | 2                              |
| Orientation                    | Right Angle                    |
| PC Tail Length                 | 3.50mm                         |
| PCB Locator                    | Yes                            |
| PCB Retention                  | Yes                            |
| PCB Thickness - Recommended    | 1.60mm                         |
| Packaging Type                 | Tray                           |
| Pitch - Mating Interface       | 3.00mm                         |
| Plating min - Mating           | 0.381µm                        |
| Plating min - Termination      | 2.540µm                        |
| Polarized to PCB               | Yes                            |
| Shrouded                       | Fully                          |
| Stackable                      | No                             |
| Surface Mount Compatible (SMC) | Yes                            |

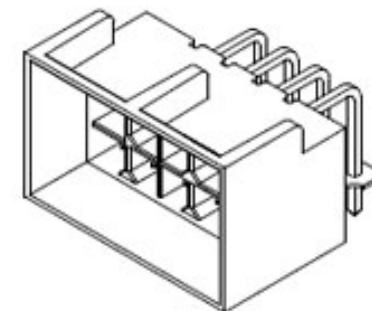

*Series image - Reference only*

**EU ELV**

**Not Relevant**

**EU RoHS**

**Compliant**

**REACH SVHC**

Not Contained Per - ED/61/2018 (27 June 2018)

**Halogen-Free**

**Status**

**Not Low-Halogen**

For more information, please visit [Contact US](#)

China ROHS

ELV

RoHS Phthalates

Green Image

Not Relevant

Not Contained

**Search Parts in this Series**

[44428](#) Series

**Mates With**

[44133](#) Micro-Fit BMI Panel Mount Receptacle Housing, [44764](#) Micro-Fit BMI Receptacle Header, [44769](#) Micro-Fit BMI Receptacle Header

|                               |                |
|-------------------------------|----------------|
| Temperature Range - Operating | -40° to +105°C |
| Termination Interface: Style  | Through Hole   |

**Electrical**

|                               |      |
|-------------------------------|------|
| Current - Maximum per Contact | 8.5A |
| Voltage - Maximum             | 600V |

**Solder Process Data**

|                                                |      |
|------------------------------------------------|------|
| Duration at Max. Process Temperature (seconds) | 005  |
| Lead-free Process Capability                   | WAVE |
| Max. Cycles at Max. Process Temperature        | 001  |
| Process Temperature max. C                     | 260  |

**Material Info****Reference - Drawing Numbers**

|                       |                                  |
|-----------------------|----------------------------------|
| Product Specification | PS-44300-001-001                 |
| Sales Drawing         | SD-44428-001                     |
| Symbol/Footprint Data | SYM-44428-2401, SYM-44428-2401_3 |
| Test Summary          | 444280001-TS-000                 |

This document was generated on 11/01/2018

**PLEASE CHECK [WWW.MOLEX.COM](http://WWW.MOLEX.COM) FOR LATEST PART INFORMATION**

# Mouser Electronics

Authorized Distributor

Click to View Pricing, Inventory, Delivery & Lifecycle Information:

[Molex:](#)

[44428-2402](#)