

"High Frequency Ceramic Solutions"

2.45 GHz Band Pass Filter

P/N 2450BP18C100D

Detail Specification: 02/13/2003


Page 1 of 2

Part Number	Frequency (MHz)	Insertion Loss	Attenuation (min.)	Return Loss	Ripple
2450BP18C100D	2400 -2500	2.0 dB max	40 dB @ 900-928 MHz 30 dB @ 1.2 - 1.8 GHz 25 dB @ 2.1 GHz 35 dB @ 4.8 - 5.0 GHz 30 dB @ 7.2 - 7.5 GHz	9.5 dB min.	0.7 dB min.

Input Power	Group Delay	Impedance	Operating Temperature Range
500 mWatt max	5 nsec max	50 Ω	-40 to +85°C


Mechanical Dimensions

	L	W	T	a	b	c	d
Inches	0.126 $\pm$.006	0.063 $\pm$.006	0.051 $\pm$.004	0.075 $\pm$.006	0.020 $\pm$.006	0.012 $\pm$.008	0.026 $\pm$.008
mm	3.2 $\pm$ 0.15	1.6 $\pm$ 0.15	1.3 $\pm$ 0.1	1.9 $\pm$ 0.15	0.5 $\pm$ 0.15	0.30 $\pm$ 0.2	0.65 $\pm$ 0.2

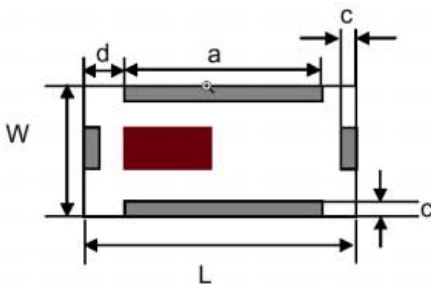

Terminal Configuration


No.	Function	No.	Function
1	GND	3	GND
2	OUT	4	IN



Mounting Considerations

Mount device with brown mark facing up. Line width should be designed to provide 50 Ω impedance matching characteristics.

Units: mm

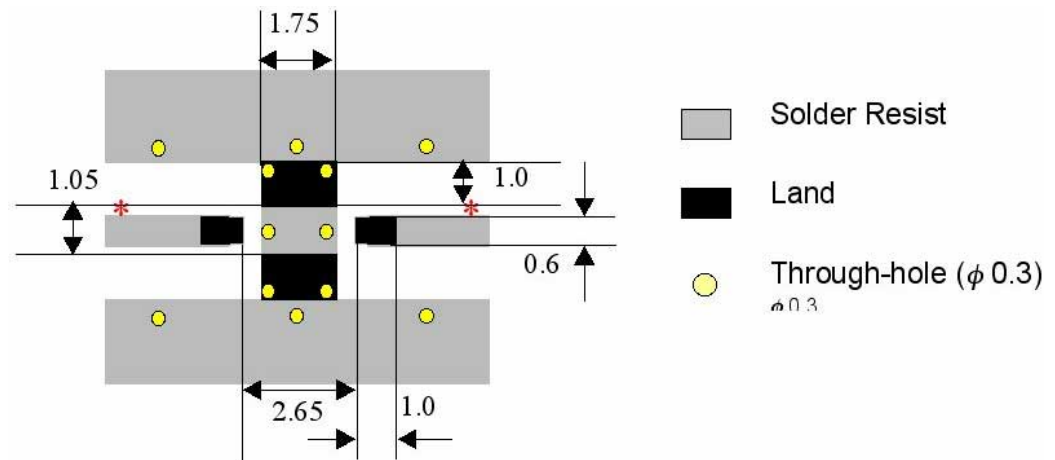

Johanson Technology, Inc. reserves the right to make design changes without notice.
All sales are subject to Johanson Technology, Inc. terms and conditions.


“High Frequency Ceramic Solutions”

2.45 GHz Band Pass Filter

Detail Specification: 02/13/2003

P/N 2450BP18C100D

Page 1 of 2

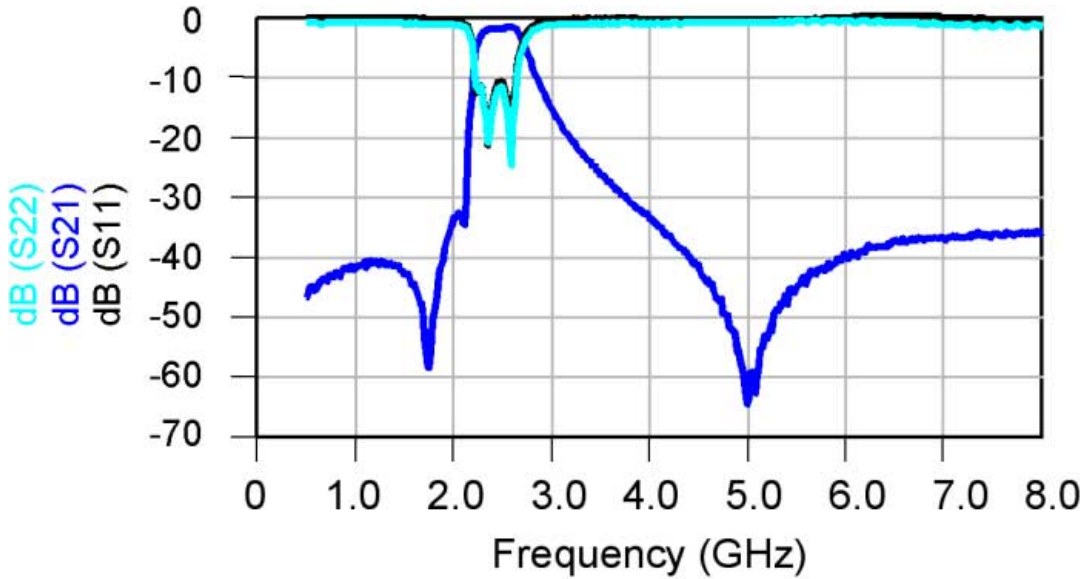

Mouser Electronics

Authorized Distributor

Click to View Pricing, Inventory, Delivery & Lifecycle Information:

Johanson:

2450BP18C100DE