

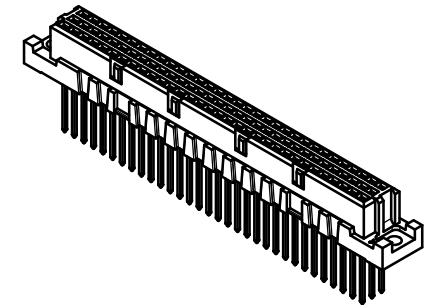
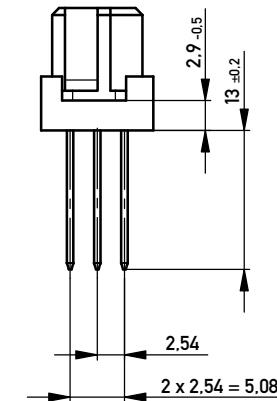
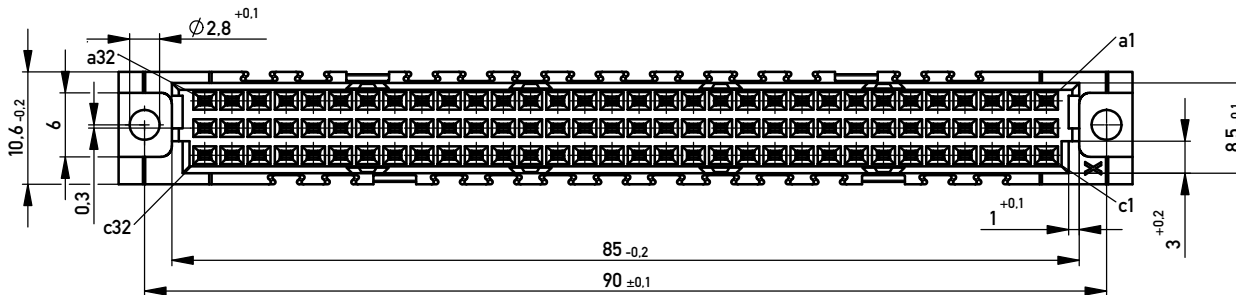


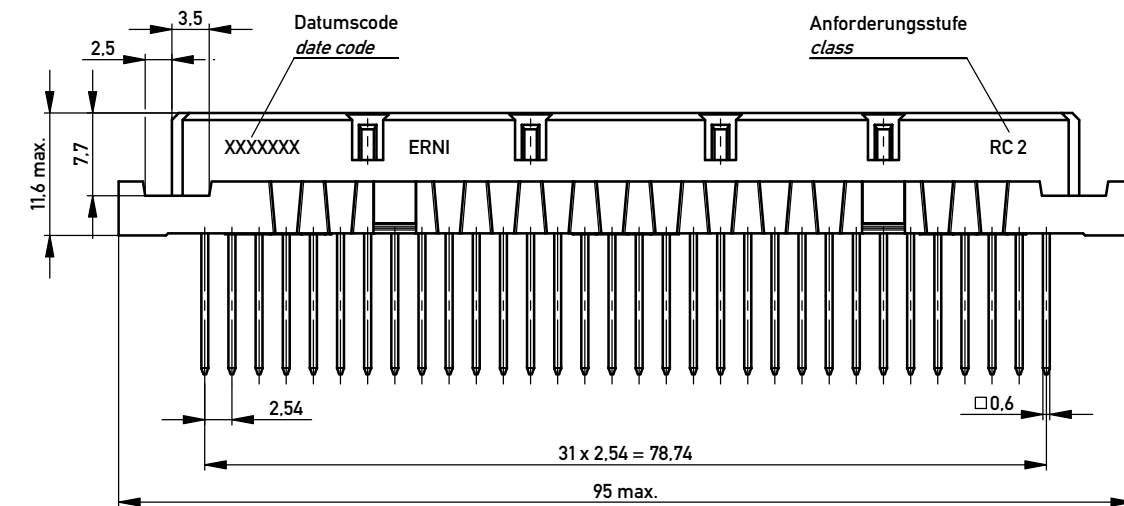


Bestückungsplan / contact layout

■ bestückt / assembled

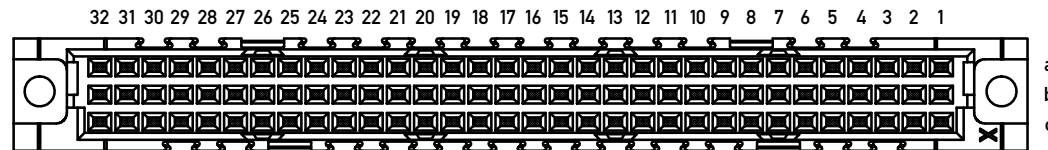

Leiterplatten-Lochbild / PCB drillhole Pattern

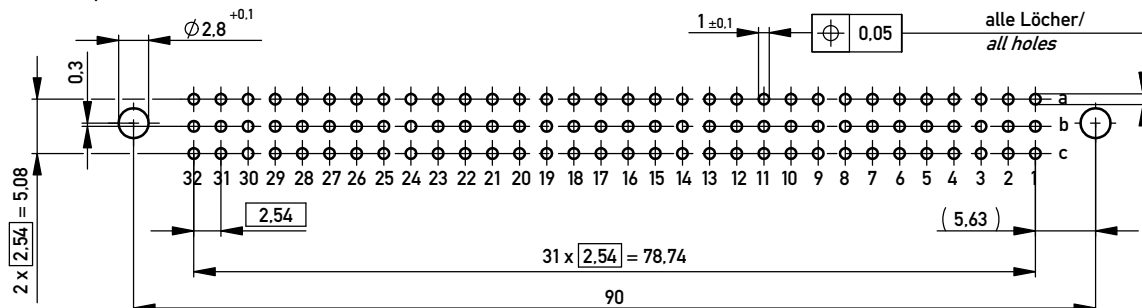

Tauchlötanschluss 0,6 x 0,6 mm / solder terminal 0,6 x 0,6 mm
 Isolierwerkstoff / housing material : PBT GF 30
 Bauart 7 / type 7
 Anforderungsstufe 2 = 400 Steckzyklen / performance class 2 = 400 mating cycles
 Fehlende Masse und Angaben nach IEC 60 603-2 / DIN EN 60 603-2
 Missing Information and dimensions per IEC 60 603-2

Copyright by ERNI GmbH
Proprietary notice pursuant to ISO 9001 to be observed.

Information:			Tolerances		 All Dimensions in mm		Scale 2:1			
All rights reserved. Only for Information. To ensure that this is the latest version of this drawing, please contact one of the ERNI companies before using.			Subject to modification without prior notice. Drawing will not be updated.			Designation				
						Federleiste C 96 Löt <i>Fem. Conn. C 96 solder</i>				
						 www.ERNI.com			244304	
b		22.12.2010				Class			A3	
Index		Date							STVC	

Copyright by ERNI GmbH
 Proprietary notice pursuant to ISO 9006 to be observed.

Mouser Electronics

Authorized Distributor

Click to View Pricing, Inventory, Delivery & Lifecycle Information:

[ERNI Electronics:](#)

[244304](#)