
## SSL-LX3044SRD-12V



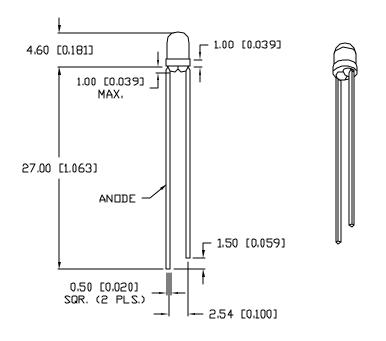

ELECTRO-OPTICAL CH	aracteristics t	A=25°C	Vf=12	īΛ	
PARAMETER	MIN	TYP	MAX	UNITS	TEST COND
PEAK WAVELENGTH		660		nm	
FORWARD VOLTAGE		12.0	14.0	۷f	
REVERSE VOLTAGE	4.0			٧r	AسI <sub>r</sub> =100
AXIAL INTENSITY		30		mcd	V <sub>f</sub> =12V
VIEWING ANGLE		60		2x theta	
EMITTED COLOR:	RED				
EPOXY LENS FINISH:	RED DIFFUSED				

## LIMITS OF SAFE OPERATION AT 25°C

PARAMETER	MAX	UNITS	
PEAK FORWARD VOLTAGE	14	٧	
STEADY CURRENT	12	mA	
POWER DISSIPATION	315	mW	
DERATE FROM 25°C	— 1.Б	mW/℃	
OPERATING, STORAGE TEMP.	- 40 TO +85	•ċ	
SOLDERING TEMP.	+ 260	.c	
2.0mm FROM BODY		3 SEG. MAX	

UNCONTROLLED DOCUMENT

\*UNLESS OTHERWISE SPECIFIED TOLERANCES PER DECINAL PRECISION ARE: X=±1 (±0.039), XX=±0.5 (±0.020), XXX=±0.25 (±0.010), XXXX=±0.127 (±0.005). LEAD SIZE=±0.05 (±0.002), LEAD LENGTH=±0.75 (±0.030). MIN= +DECINAL PRECISION MAX.= +0.00 (±0.000), MIN= +DECIN

PART NUMBER

SSL-LX3044SRD-12V

T-3mm (T-1) 660nm SUPER RED LED, RED DIFFUSED LENS, 12 VOLT OPERATION.

CONFIDENTIAL INFORMATION

THE INFORMATION CONTAINED IN THIS DOCUMENT IS THE PROPERTY OF LUMEX INC., EXCEPT AS SPECFICALLY AUTHORIZED IN WRITING BY LUMEX INC., THE HOLDER OF THIS DOCUMENT SHALL KEEP ALL INFORMATION CONTAINED HEREIN CONFIDENTIAL AND SHALL PROTECT SAME IN WHOLE OR IN PART FROM DISCLOSURE AND DISSEMINATION TO ALL THIRD PARTIES.

RELABILITY NOTE

OUR MANY YEARS OF EXPERIENCE DATA ACCUMULATION INDICATE THAT

SOLDER HEAT IS A MAJOR CAUSE OF EARLY AND FUTURE FAILURE.

PLEASE PAY ATTENTION TO YOUR SOLDERING PROCESS.



290 E. HELEN ROAD
PALATINE, IL 60067-6976
PHONE: +1.847.359.2790
US WEB: www.lumex.com
TW WEB: www.lumex.com.tw

DRAWN BY: CHECKED BY: APPROVED BY: DATE: 4.10.01
PAGE: 1 OF 1
BC SCALE: N/A

## **Mouser Electronics**

**Authorized Distributor** 

Click to View Pricing, Inventory, Delivery & Lifecycle Information:

Lumex:

SSL-LX3044SRD-12V