

LOC	DIST	REVISIONS					
		P	LTR	DESCRIPTION	DATE	DWN	APVD
E	B		C	ECR-05-017969	14DEC05	JMS	FWK

NOTES:

- 1

PACK IN ACCORDANCE WITH AMP SPEC 107-3275
- 2

100 TRAY PACK IN ACCORDANCE WITH AMP SPEC 107-3275
- 3

Ag PLATING
- 4

THIS ITEM MUST BE WHITE
- 5

ELECTRICAL CHARACTERISTICS

FREQUENCY RANGE:DC – 4 GHz

NOMINAL IMPEDANCE:50 Ohm

INSULATION RESISTANCE:5000 MOhm

WORKING VOLTAGE:500 Volts RMS at Sea Level

DIELECTRIC WITHSTAND VOLTAGE:1500 Volts RMS Max

CONTACT RESISTANCE:CENTRE CONTACT:1.50 mOhm Max

OUTER CONTACT:0.20 mOhm Max

VSWR @ xGHz:N/A

INSERTION LOSS xdb:N/A
- 6

MECHANICAL CHARATERISTICS

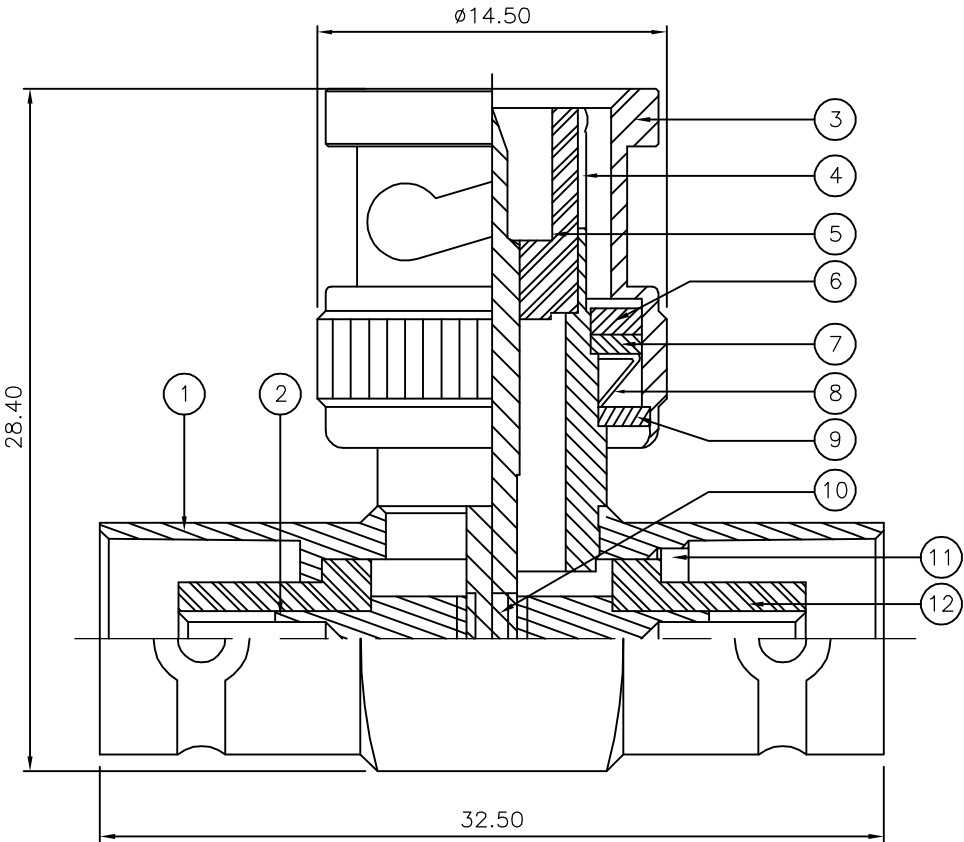
COUPLING RETENTION FORCE:N/A

CABLE RETENETION FORCE:N/A



DURABILITY:500 Cycles Min
- 7

ENVIRONMENTAL CHARACTERISTICS

OPERATING TEMPERATURE:-65 to +165 DegC



		2	2	PTFE	INSULATION	12
		1	1	BRASS	SLEEVE	11
		1	1	BRASS	CONTACT II	10
		1	1	BRASS	WASHER	9
		1	1	SPRING STEEL	SPRING	8
		1	1	BRASS	RETAINING RING	7
		1	1	SILICON RUBBER	GASKET	6
		1	1	PTFE	INSULATION	5
		1	1	BRASS	BODY 2	4
		1	1	BRASS	SHELL	3
		1	1	BRASS	CONTACT I	2
		1	1	BRASS	BODY 1	1
		6--0	1--0	MATERIAL	DESCRIPTION	ITEM

				
QUANTITY PER ASSY				PARTS LIST
<div><div><div><div>tyco</div><div>Electronics</div></div></div><div>Tyco Electronics Corporation</div><div>Bideford EX39 4HE</div></div>				
NAME				
BNC TEE ADAPTOR J-P-J 50 OHM				
—				
—				
SIZE	CAGE CODE	DRAWING NO		RESTRICTED TO
A3	00779	C-1337459		—
		SCALE	SHEET	REV
		NTS	1 OF 1	C

THIS DRAWING IS A CONTROLLED DOCUMENT.

DIMENSIONS:	TOLERANCES UNLESS OTHERWISE SPECIFIED:
mm	
	0 PLC ± -
	1 PLC ± -
	2 PLC ± -
	3 PLC ± -
	4 PLC ± -
	ANGLES ± -
MATERIAL	FINISH
SEE TABLE	—

DWN	J.SANDWELL	14DEC05
CHK	S.PARLOW	14DEC05
APVD	F.WHEELER-KING	14DEC05
PRODUCT SPEC	—	
APPLICATION SPEC	—	
WEIGHT	—	
CUSTOMER DRAWING		

Mouser Electronics

Authorized Distributor

Click to View Pricing, Inventory, Delivery & Lifecycle Information:

[TE Connectivity:](#)

[1-1337459-0](#)