

LOC	DIST	REVISIONS					
AD	00	P	LTR	DESCRIPTION	DATE	DWN	APVD
			C1	REVISED PER ECO-12-006972	29AUG2012	KH	JE

- 2

PHOSPHOR BRONZE
- 3

LCP, UL94V-0
- 4

FINISH:
CONTACT MATING AREA MEETS THE PERFORMANCE REQUIREMENTS OF
TE CONNECTIVITY PRODUCT SPECIFICATION 108-1957; BASED ON
TELCORDIA GR-1217-CORE, APPLICATIONS IN UNCONTROLLED ENVIRONMENTS.
COMPLIANT PIN AREA: 0.5µm MIN MATTE TIN OVER BASE PLATING.
- 5






CONNECTOR MARKED WITH PART NUMBER AND DATE CODE
- 6

REFERENCE APPLICATION SPEC 114-13020 FOR RECOMMENDED
PLATED THRU HOLE DIAMETER AND PLATING THICKNESS.
- 7

APPLICATION SEATING HEIGHT TO PRINTED CIRCUIT BOARD
- 8

DATUMS AND BASIC DIMENSIONS ESTABLISHED BY CUSTOMER
- 9

CONTACT AREA LUBRICATED WITH BELLCORE APPROVED LUBRICANT
TECHNICAL REFERENCE: GR-1217-CORE, ISSUE1, NOVEMBER 1995

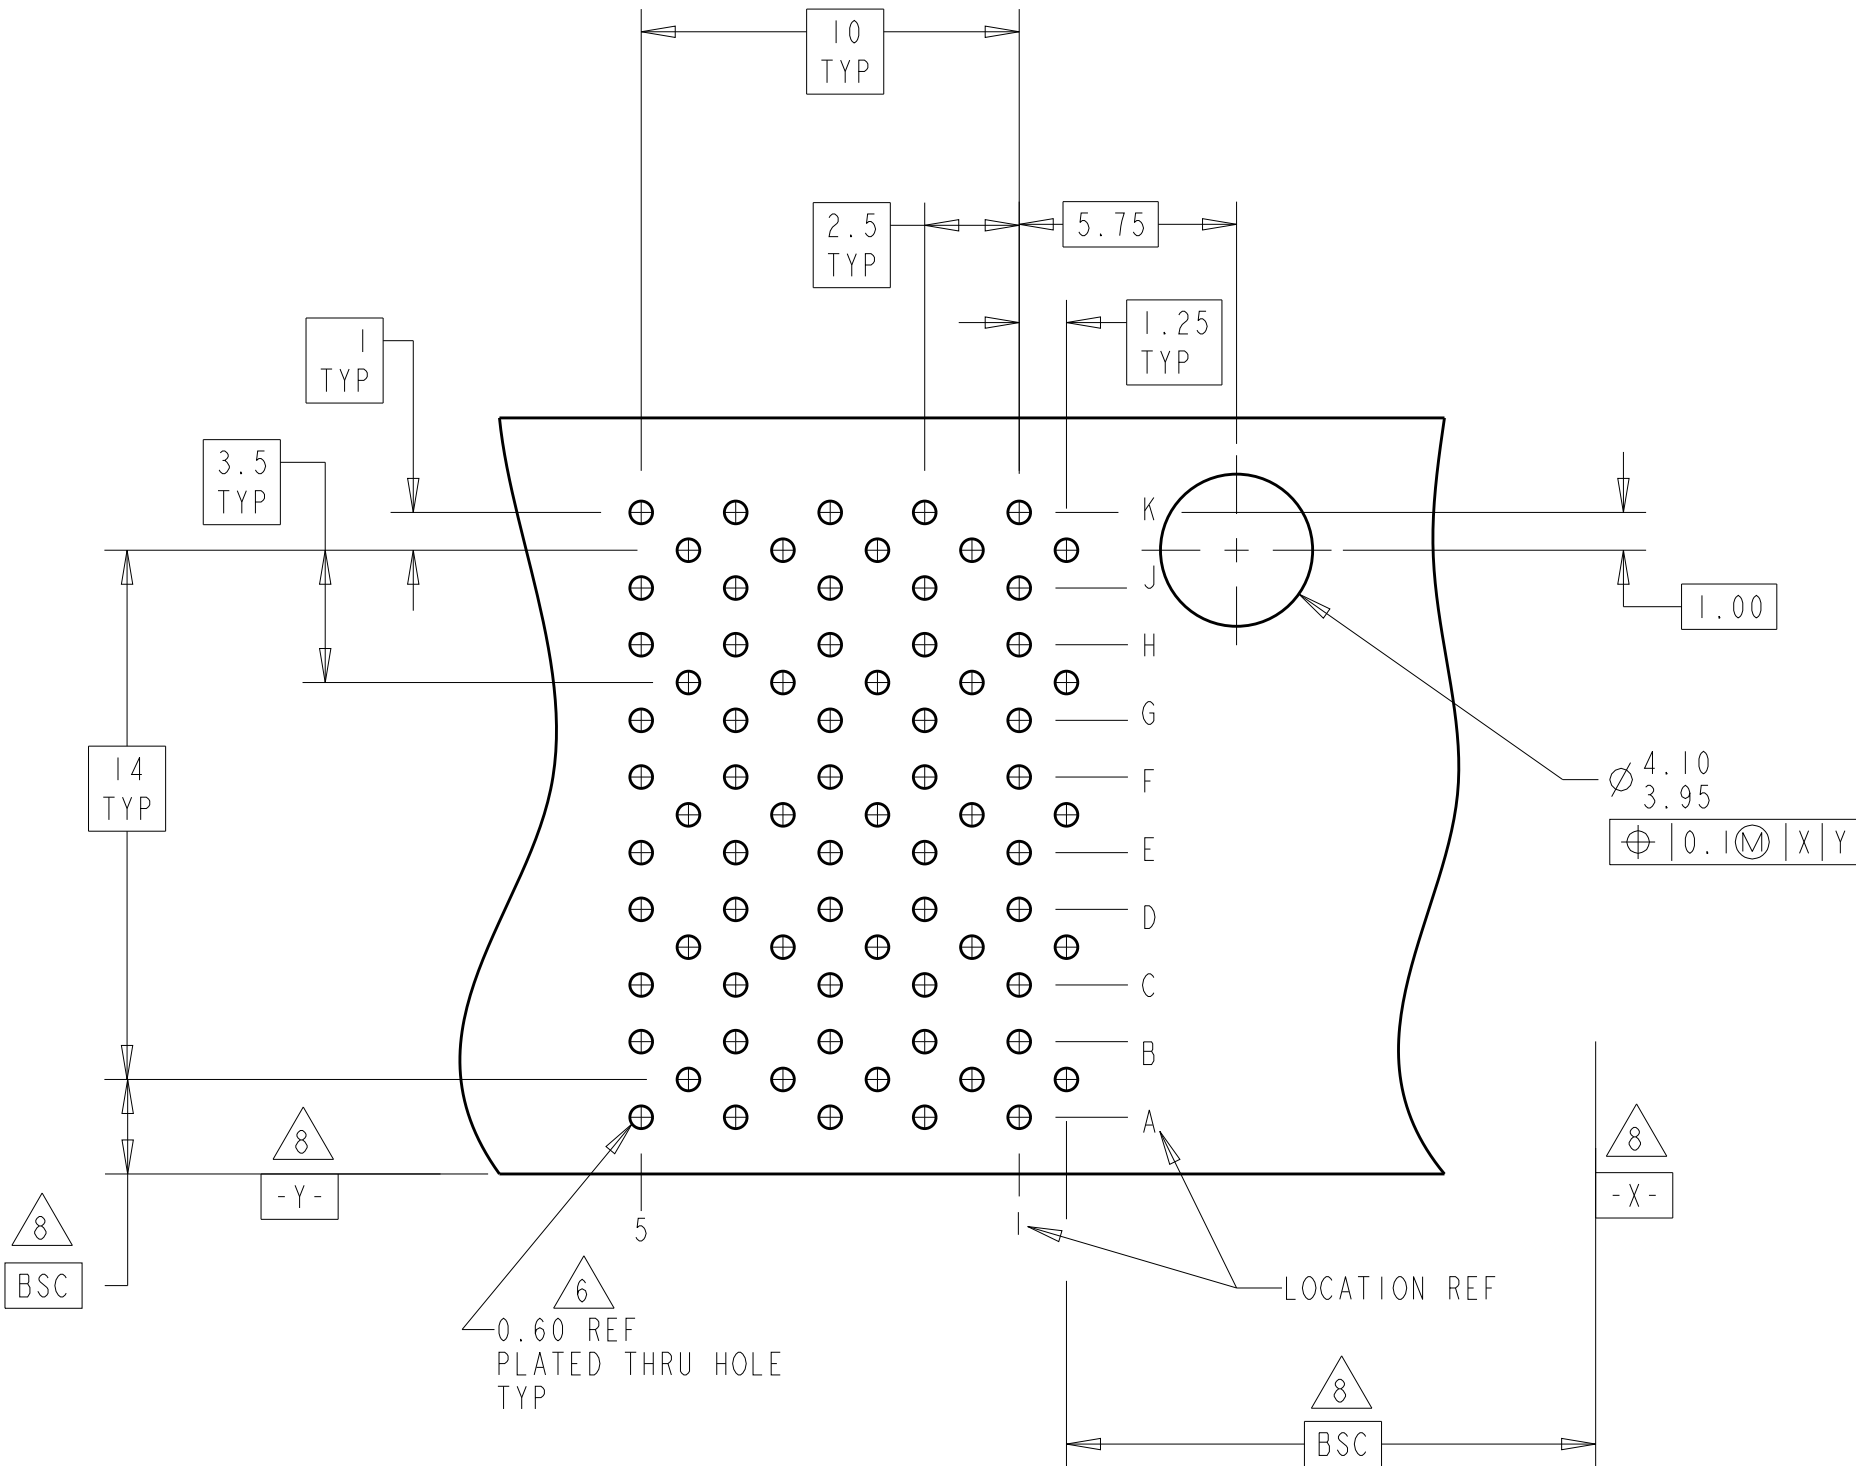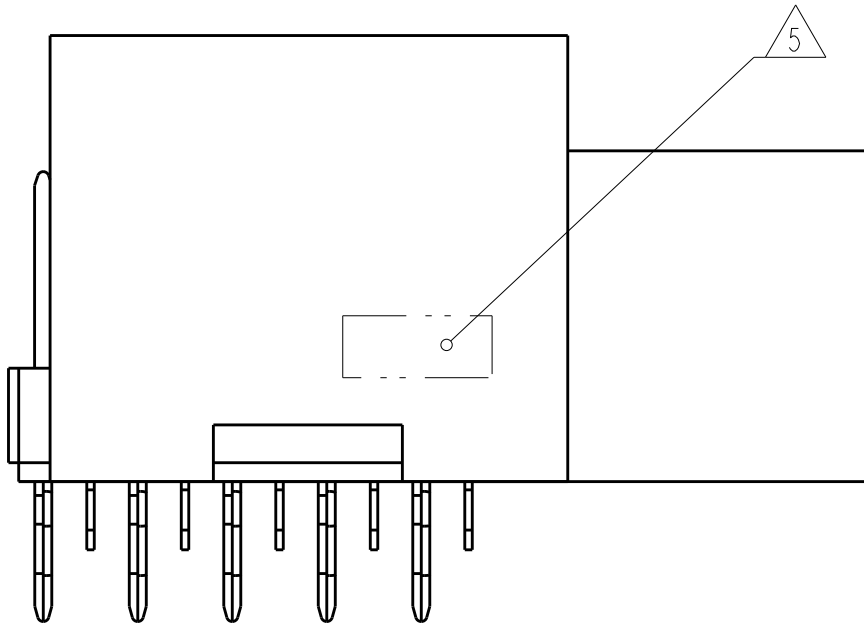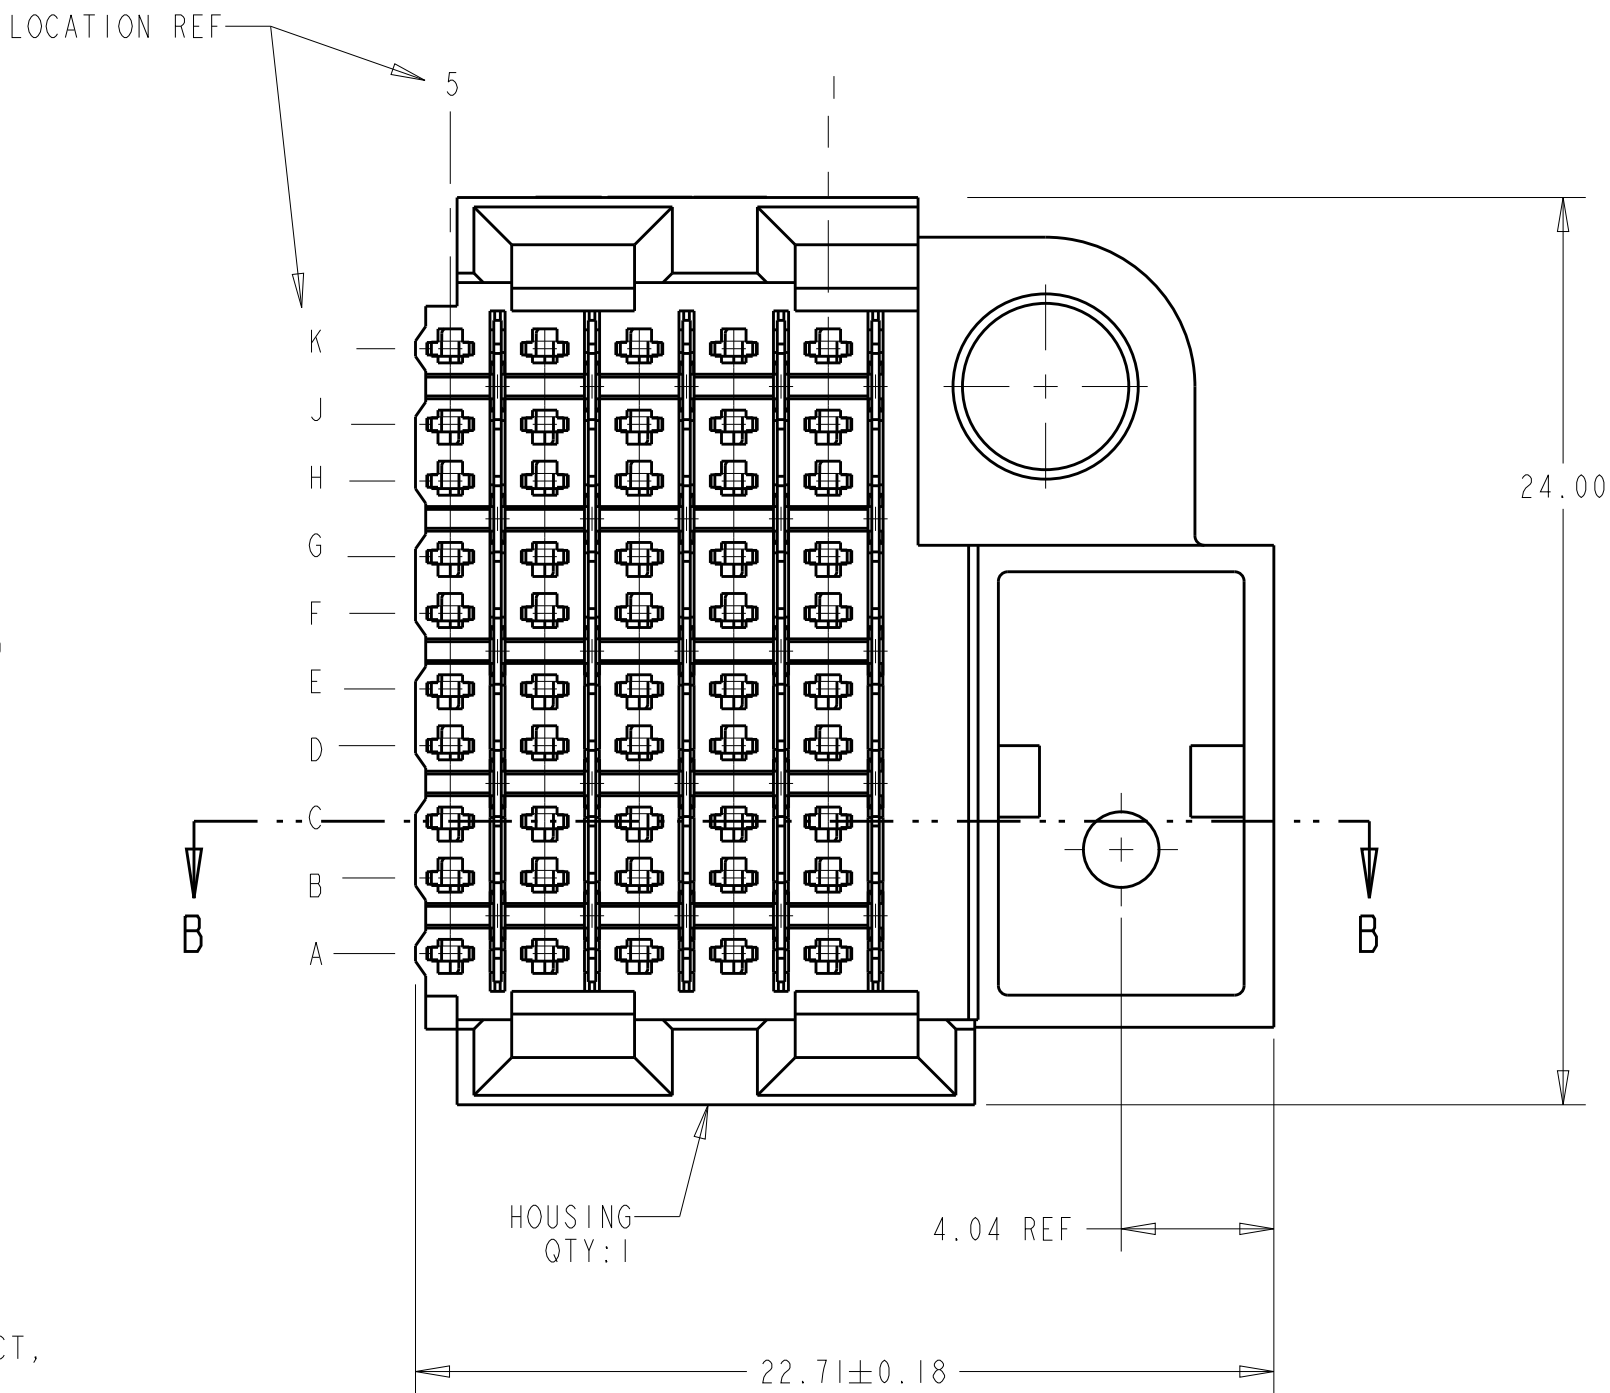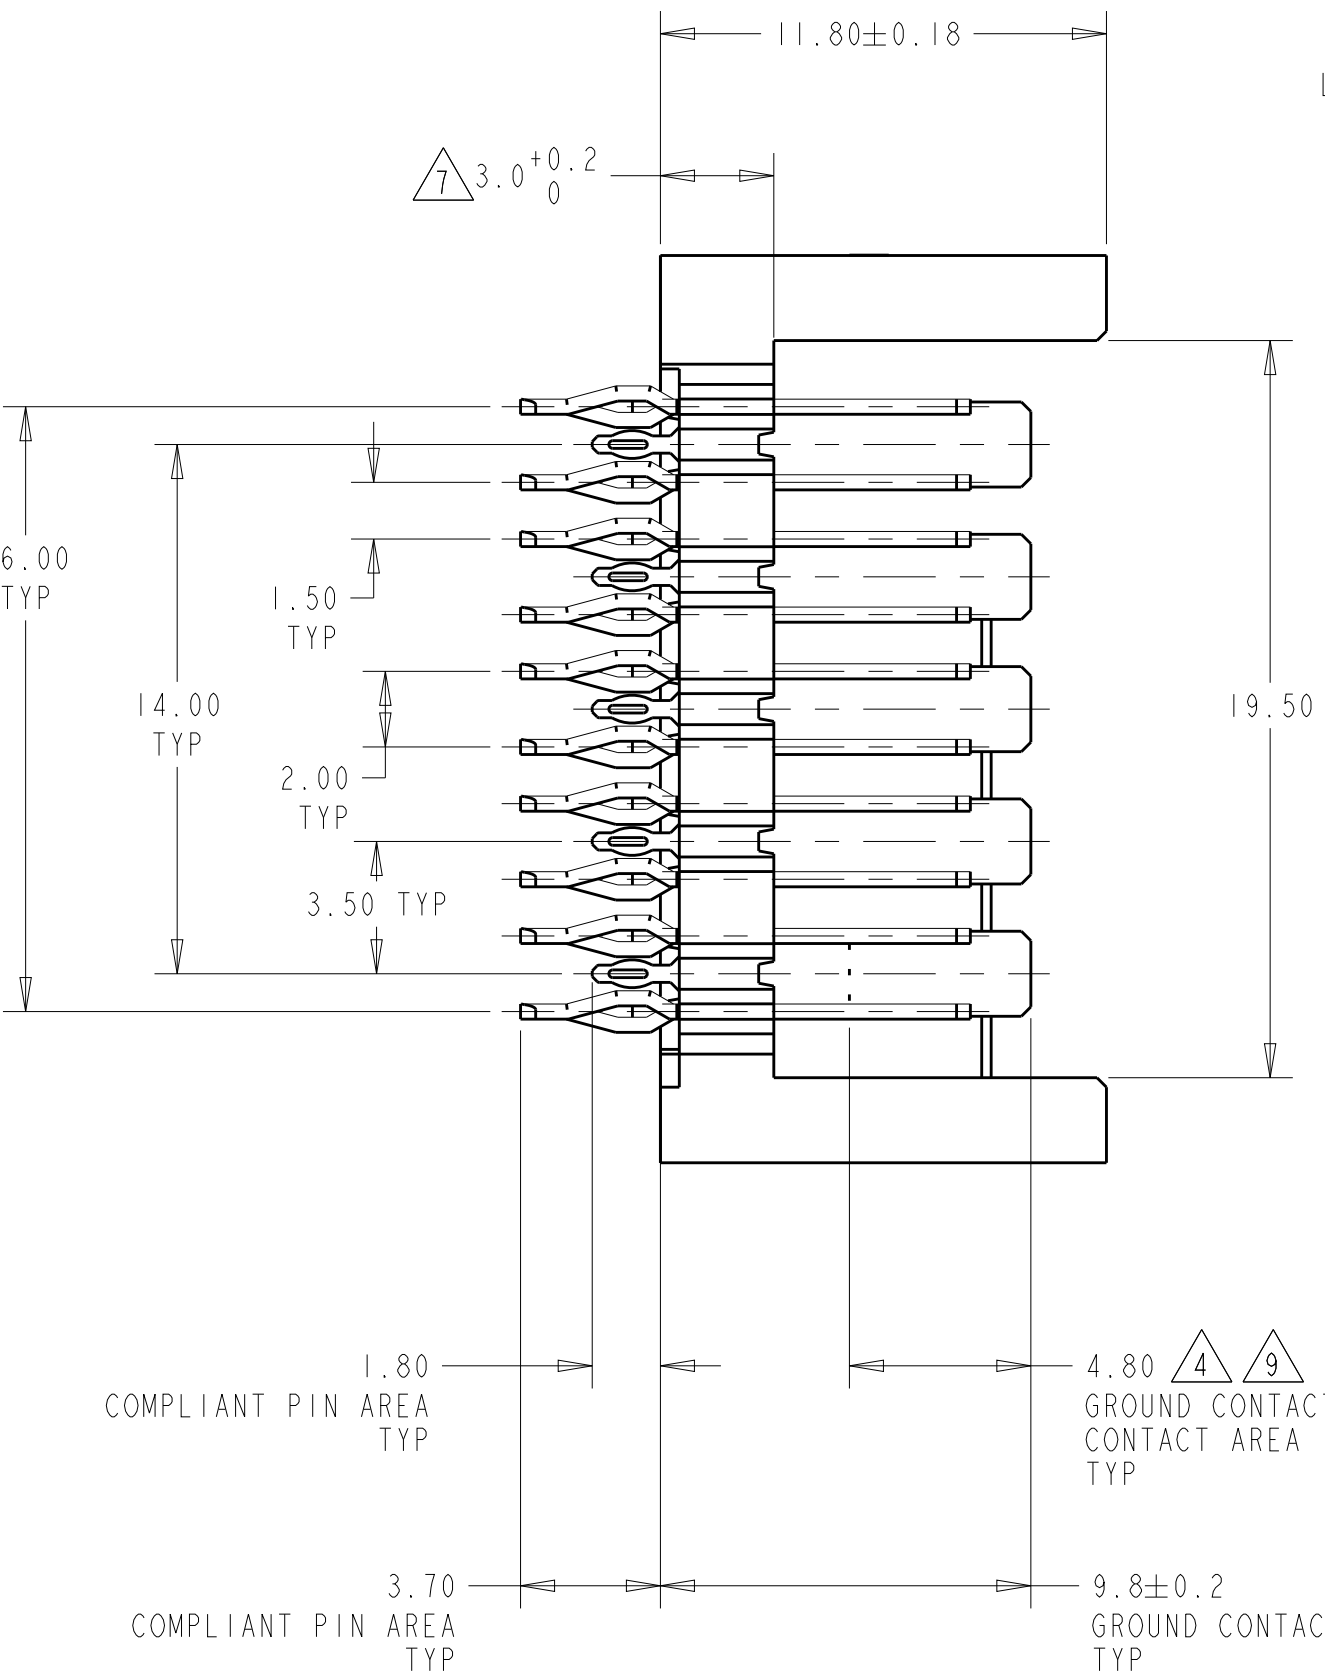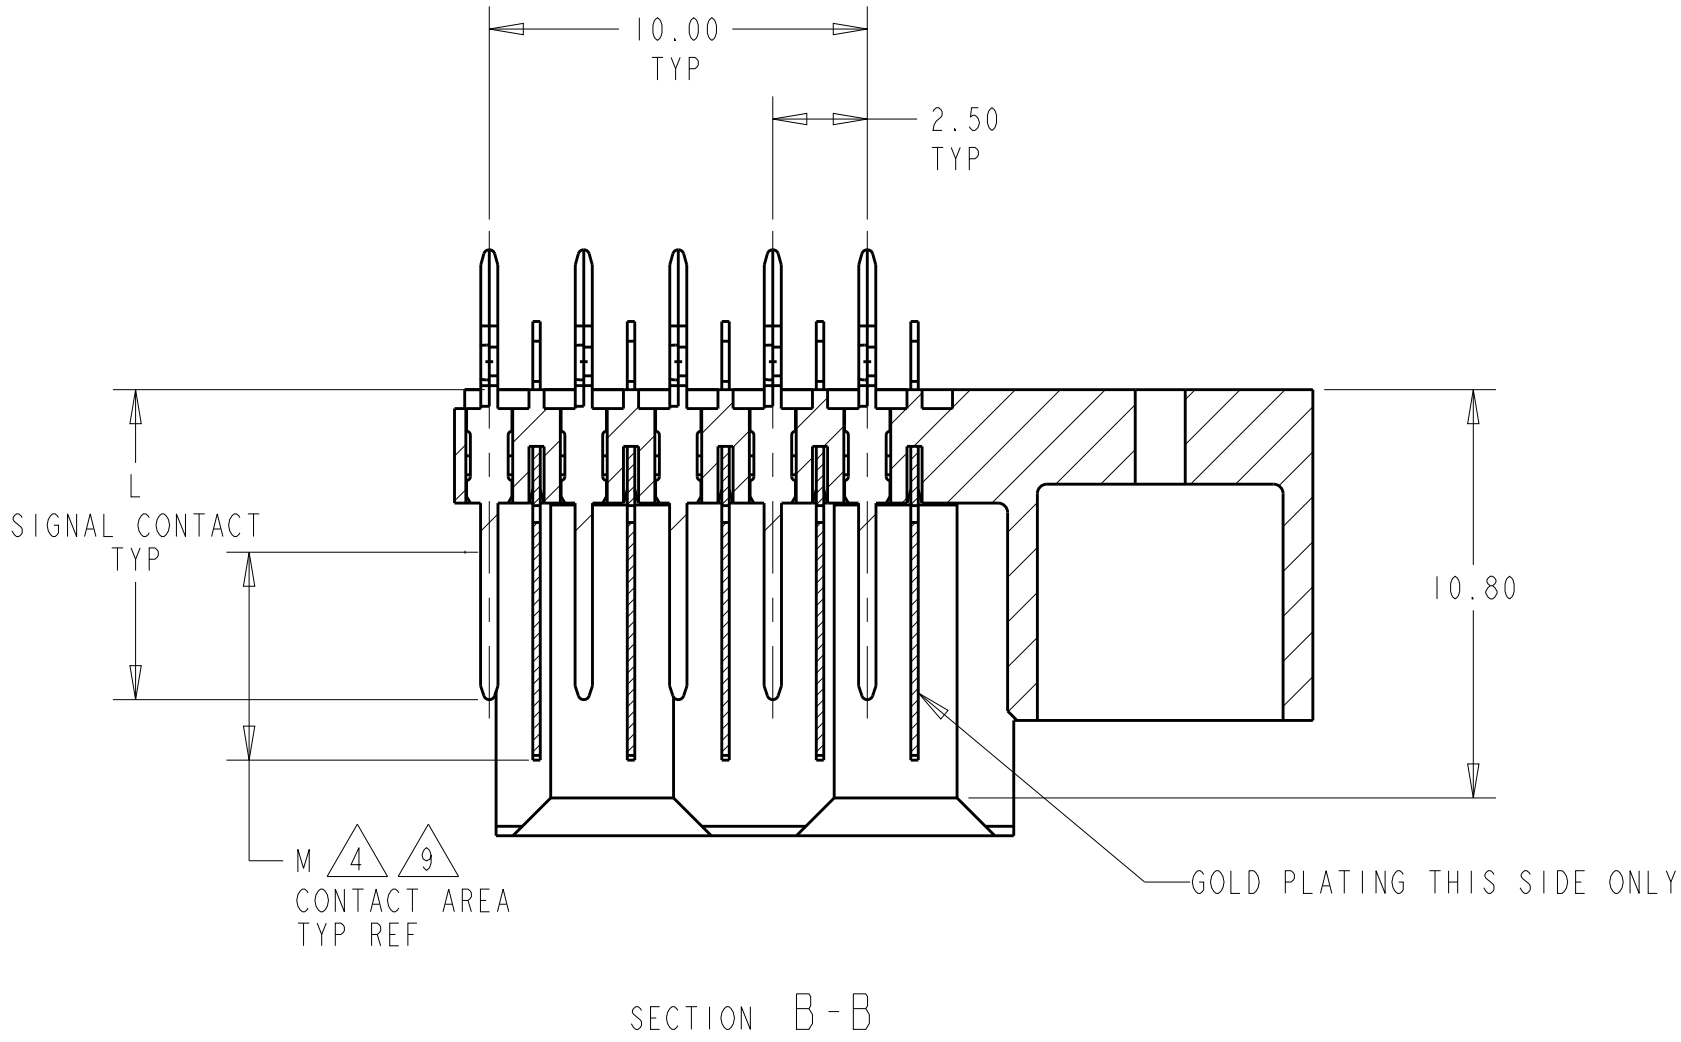

RECOMMENDED
PRINTED CIRCUIT BOARD
LAYOUT
COMPONENT SIDE OF PRINTED CIRCUIT BOARD

OBSOLETE	5.30	9.7	5120672-2
	5.50	8.2	5120672-1
	M	L	PART NUMBER

THIS DRAWING IS A CONTROLLED DOCUMENT.		DWN B. CARBO	06DEC04	 TE Connectivity		
DIMENSIONS:		CHK R. PATTERSON	06DEC04			
TOLERANCES UNLESS OTHERWISE SPECIFIED:		APVD R. PATTERSON	06DEC04			
mm		PRODUCT SPEC				
	0 PLC	±	NAME HEADER ASSEMBLY, 50 POSITION, LEFT HAND, 10 ROW, Z-PACK HS3			
	1 PLC	±				
	2 PLC	±0.13				
	3 PLC	±0.05				
4 PLC	±	APPLICATION SPEC				
ANGLES			SIZE	CAGE CODE	DRAWING NO	RESTRICTED TO
FINISH			A1	00779	C=5120672	-
MATERIAL			CUSTOMER DRAWING			
HOUSING: 3			SCALE 5:1			
CONTACTS: 2			SHEET 1 OF 1			
SIGNAL CONTACT: 4			REV C			

Mouser Electronics

Authorized Distributor

Click to View Pricing, Inventory, Delivery & Lifecycle Information:

[TE Connectivity:](#)

[5120672-1](#)