

THIS DRAWING IS UNPUBLISHED.

RELEASED FOR PUBLICATION




ALL RIGHTS RESERVED.

© COPYRIGHT - By -

LOC	DIST	REVISIONS					
		P	LTR	DESCRIPTION	DATE	DWN	APVD
E	B		A1	REVISED PER ECO-11-005150	21MAR11	RK	HMR

TECHNICAL SPECIFICATION

DISSIPATION AT 25°C 75 WATTS MOUNTED
OHMIC RANGE ON STD HEATSINK
R10 TO 50K
STABILITY $\Delta R \leq 2\%$
per 1000hrs
ISOLATION VOLTAGE 3500v DC/AC pk
MAX WORKING VOLTAGE 1400V DC/AC rms
TEMP COEFFICIENT >100 50ppm
 >1000 25ppm
CLIMATIC CATEGORY 55/200/56

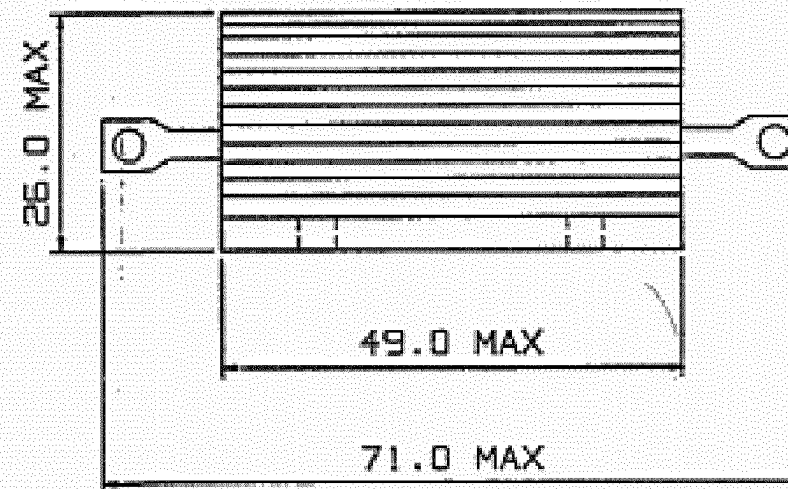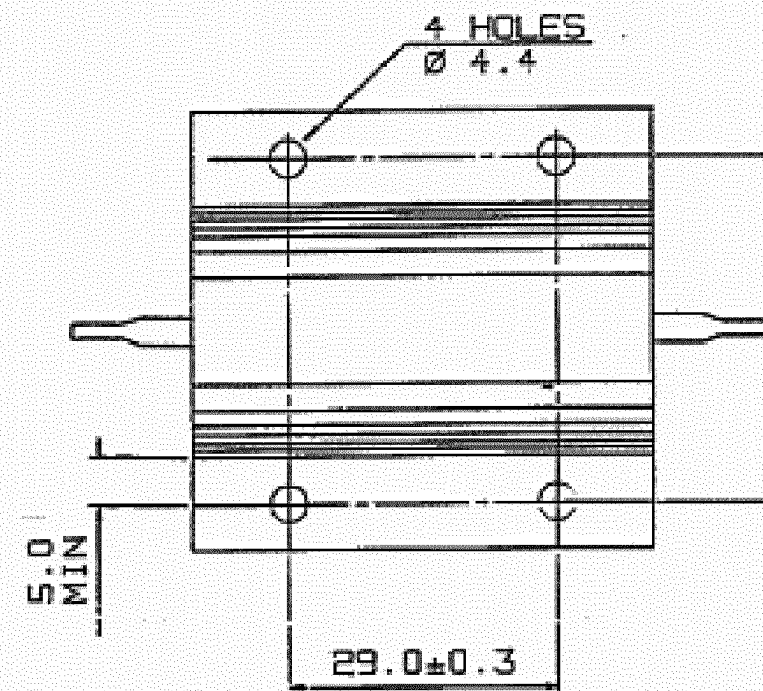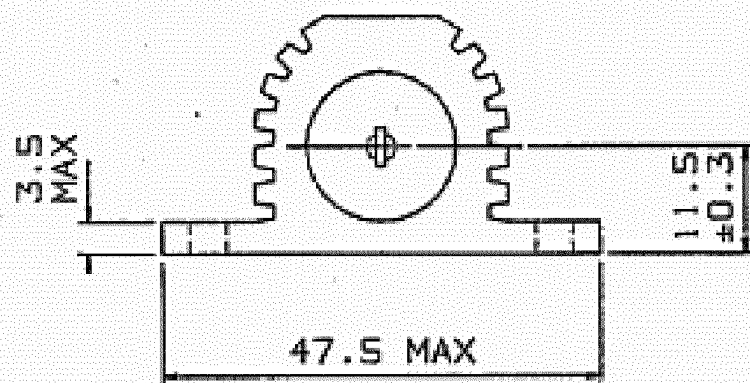

NOTE:

1) FOR A SPECIFIC PN FOR A RESISTANCE VALUE AND TOLERANCE, PLEASE REFER TO DMF.

RoHS Compliant

THIS DRAWING IS A CONTROLLED DOCUMENT.

DIMENSIONS: mm	TOLERANCES UNLESS OTHERWISE SPECIFIED:
	0 PLC ± - 1 PLC ± - 2 PLC ± - 3 PLC ± - 4 PLC ± - ANGLES ± -
MATERIAL	FINISH
-	-

DWN	03JUN08
CHK	PRAKASH KANNIAH
APVD	03JUN08
R BLANCH	
J CATCHPOLE	
PRODUCT SPEC	
APPLICATION SPEC	
WEIGHT	-
CUSTOMER DRAWING	



TE Connectivity

THS75 METAL CLAD
RESISTOR

SIZE	CAGE CODE	DRAWING NO	RESTRICTED TO
A3	00779	C-1879363	-
SCALE	NTS	SHEET	1 OF 1
REV	A1		

Mouser Electronics

Authorized Distributor

Click to View Pricing, Inventory, Delivery & Lifecycle Information:

[TE Connectivity:](#)

[THS7533RJ](#)