


TOLERANCE = ±.010

COIL: @ 25°C	
RESISTANCE	300 OHMS ± 10%
NOMINAL VOLTAGE	28.0 VDC
MUST OPERATE	13.0 VDC
MUST RELEASE	7.0 VDC MAX, 1.6 VDC MIN.

ENVIRONMENT:	
VIBRATION	10 CPS TO 2000 CPS @ 20 g's
SHOCK	50 g's 11 MS. DURATION
TEMPERATURE	-70 °C TO +125 °C

NOTES: OPERATE & RELEASE 10 MS MAX.
 OPERATE BOUNCE 2 MS MAX.
 RELEASE BOUNCE 5 MS MAX.

CUSTOMER DATA SHEET

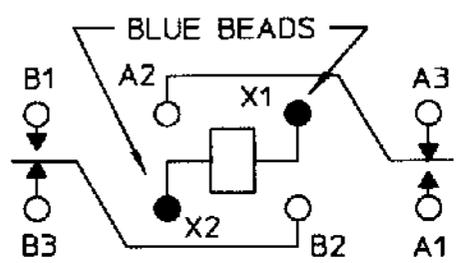

CONTACT RATING: 10 AMPS 28 VDC,
 10 AMPS 115 VAC 400 HZ RESISTIVE
 100,000 OPERATIONS

DR. R.B. 9/14/98 CK.9/14/98



CUST. GPL
 CUST. NO. MS27245-1

TYPE '07' RELAY

B07D112BC4-0007

Mouser Electronics

Authorized Distributor

Click to View Pricing, Inventory, Delivery & Lifecycle Information:

[TE Connectivity:](#)

[B07D112BC4-0007](#)