


AVERY DENNISON MARKETING SPECIFICATION

TOLERANCES IN. = .030 IN.
MM = 0.7 mm

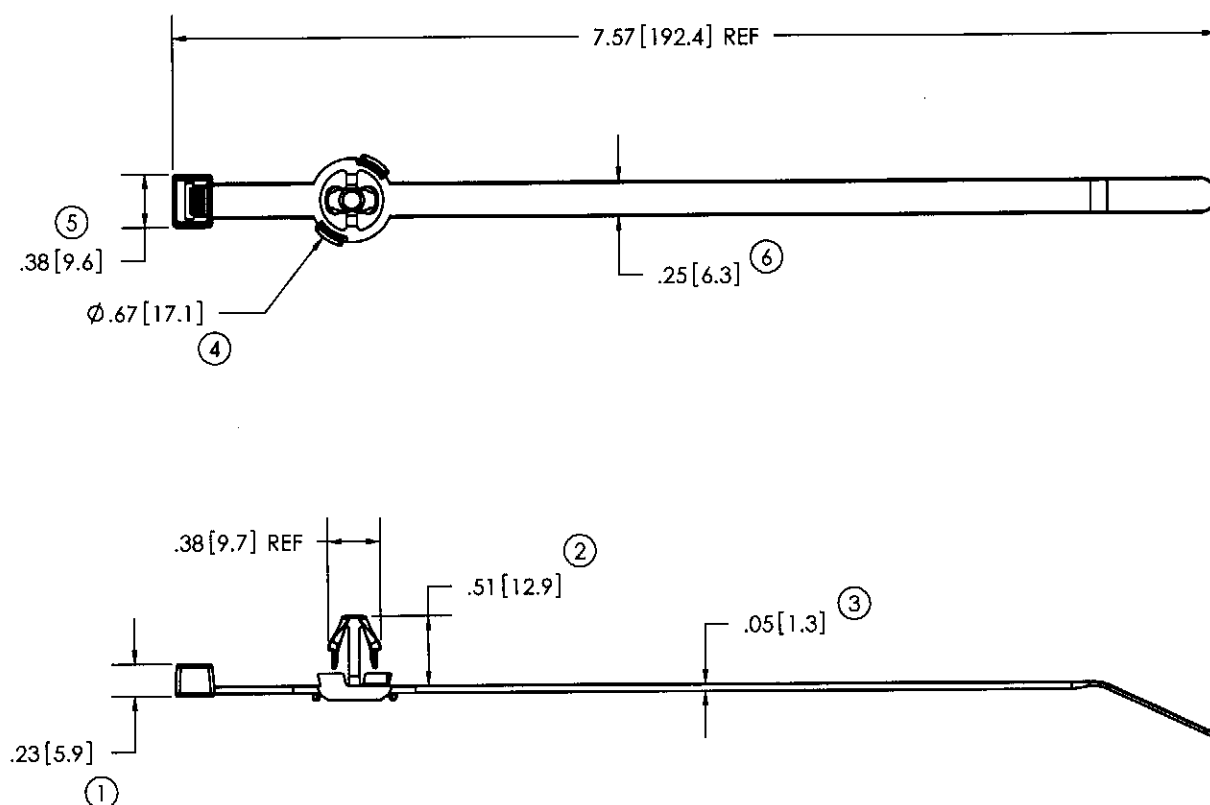

NOT TO SCALE

TENSILE STRENGTH: (LOOPED)	50 LBSF. / 22.7 KGF. MINIMUM PER MIL-S-23190.
OPERATING TEMP. RANGE:	-40 °F (-40 °C) TO 220 °F (105 °C)
MATERIAL:	IMPACT MODIFIED NYLON 6/6 PER ASTM D4066 - HEAT STABILIZED, BLACK
WEIGHT:	1.94 GRAMS/EACH
BUNDLE DIAMETER:	1/4" - 1-3/4"
MOUNTING:	6.6MM HOLE
APPLICATION TOOL:	12001 - HAND INSTALLATION TOOL 12500 - PNEUMATIC INSTALLATION TOOL
TOOL TENSION SETTING:	6-8
PACKAGED IN:	500/BAG, 10 BAGS/MASTER



**AVERY
DENNISON**

FASTENER DIVISION
FITCHBURG, MA 01420 U.S.A.
TEL. 1-800-225-5913
MA. 978-353-8157

DESCRIPTION:

90 DEGREE ARROW TIE, BLACK

APPROVALS:

T.S.:

ENG'RG:

8.14.07

STOCK NO.

20087

REV.

A

Mouser Electronics

Authorized Distributor

Click to View Pricing, Inventory, Delivery & Lifecycle Information:

[Avery Dennison:](#)

[20087-0](#)